

Product Installation guide

IP20



For Indoor use only



DON'T TOUCH
THE LED !



25°C

RECOMMENDED ROOM
TEMPERATURE




MAKE SURE THE POWER
IS OFF DURING INSTALLATION



120-277V~
50/60 Hz



RISK OF FIRE AND
ELECTRICAL SHOCK

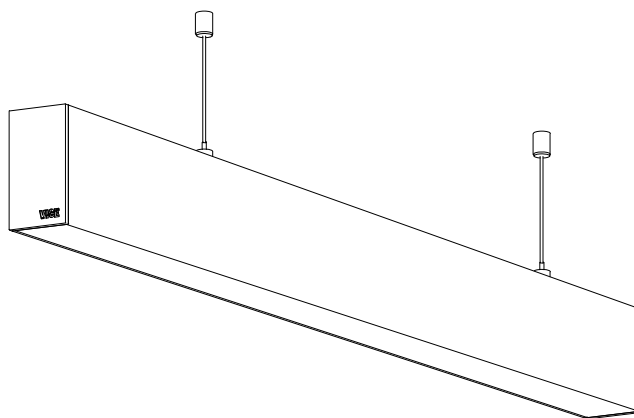


INSTALLATION INSTRUCTIONS

DISCLAIMER

Please read all instructions before beginning installation:


1. Turn off electrical power before starting the installation of the light fixture.
2. The feeding voltage must not exceed the specified fixture voltage.
3. This product must be installed by an eligible electrician.
4. Make sure the luminaire is mounted to a secure structure. Mounting the fixture in inappropriate way could lead to serious injury.
5. This luminaire is class 1, it must be earthed in a reliable way.
6. The light source of this luminaire shall only be replaced by the manufacturer, his service agent or a similar qualified person.
7. Wear gloves and safety glasses at all times when removing the luminaire from carton, installing, servicing or performing maintenance
8. Do not install damaged product! This luminaire is properly packed to avoid being damaged during transit. Inspect to confirm before installation. Any damaged or broken part during or after assembly should be replaced.
9. Unauthorized repairs or modifications will void warranty.

Section View:

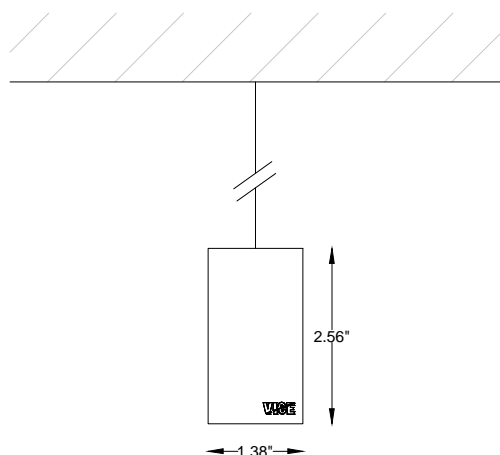


Dimensions in inch

Applicable optics:



1. CutOff Washer




2. Opal & Prismatic

Product Installation guide

For Individual Fixture

Suspension Holder


Wire Rope



- 1 Dismantle the suspension holder from the wire rope.




Screws must be provided by the installer.

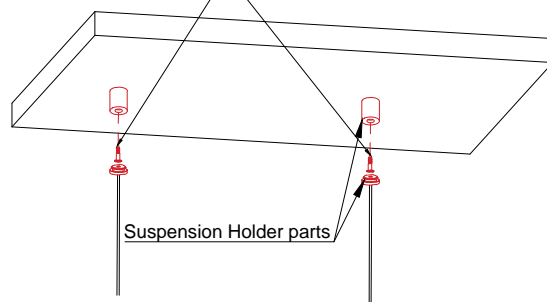


Suspension Holder parts

- 2 Screw the suspension holder to the ceiling .
- 3 Tighten both parts of the holder together .


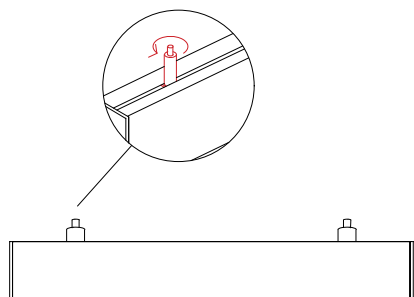


- 4 In case of need to change the gripper location untightens and slide it.

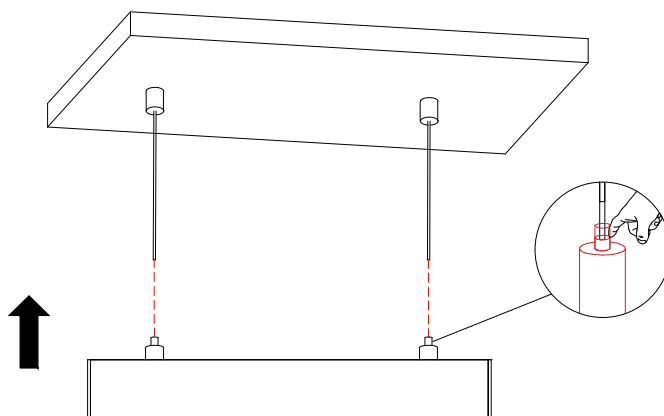


- 5 Lift the profile than insert the wire rope in the gripper.

- 7 Connect the Cable following the below colors for power input:

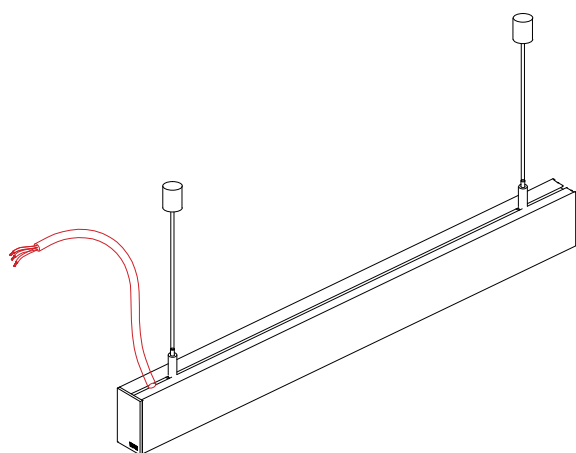

Power Input 3 Poles Suggestion :
SJTOW 3x18AWG

Black : Line
White: Neutral
Green: Earth




Power Input 5 Poles Suggestion :
SJTOW 5x18AWG

Black : Line
White: Neutral
Green: Earth
Purple : DALI/DIM +
Pink : DALI/DIM -

Product Installation guide

For continuous Run


Dismantling the fixture



- 1 Use the scraper to remove the diffuser.




Handle and store the Components in a safe place.

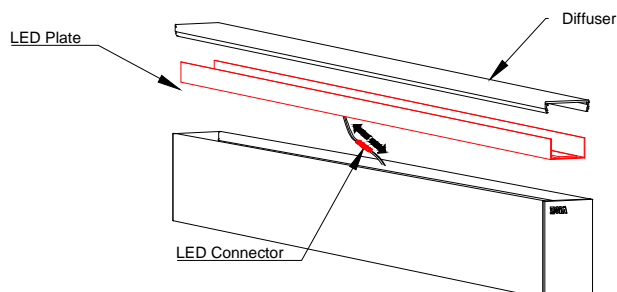


- 2 Pull the LED Plate and detach the LED connector.

- 3 Fix the Fixture to the ceiling as shown in page 2.

- 4 Connect the cable to the Terminal Block.

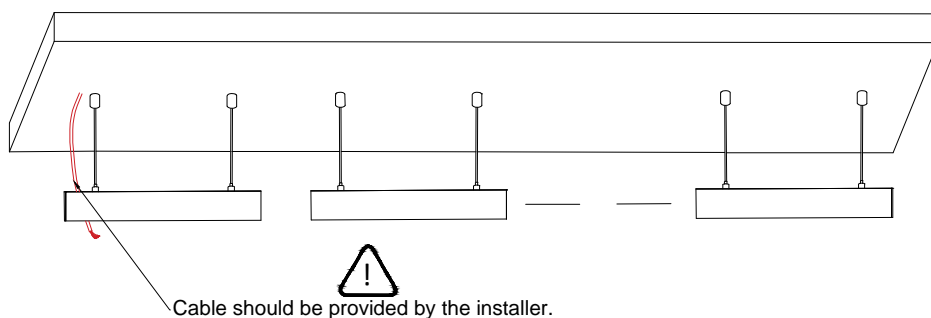


Terminal Block Connection	
Non Dimmable	
	L - Line • - Earth N - Neutral
1-10V & Dali Dimmable	
L - Line • - Earth N - Neutral	
	DIM +
	DIM -

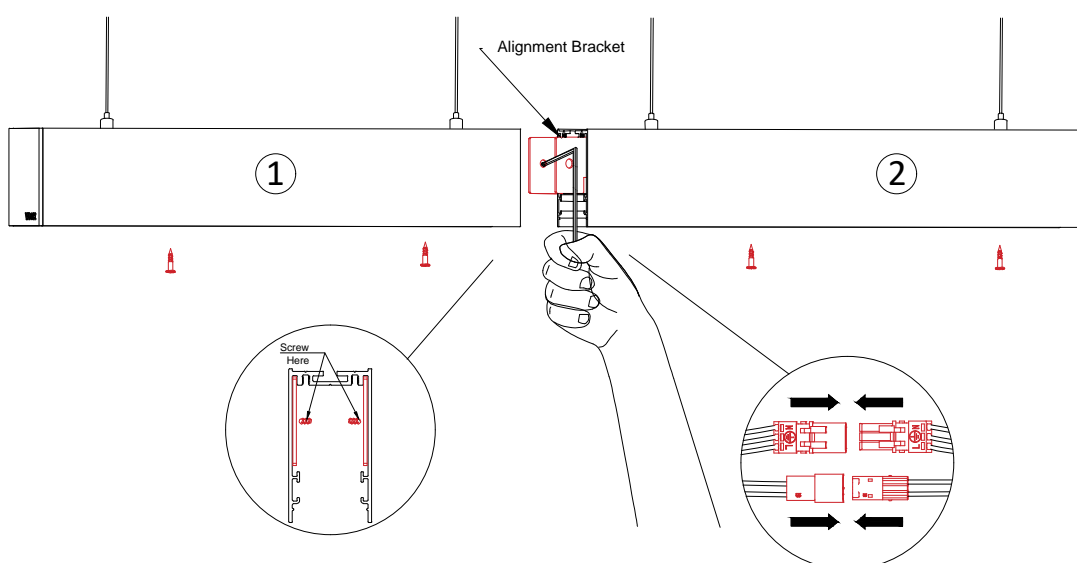

- 4
 - Fix the first fixture in its position.
 - Install and fix the second fixture next to the first one.
 - Slide the alignment bracket between the two fixtures and screws it.

- 5
 - Join the electrical /control connectors together.

Annexe A

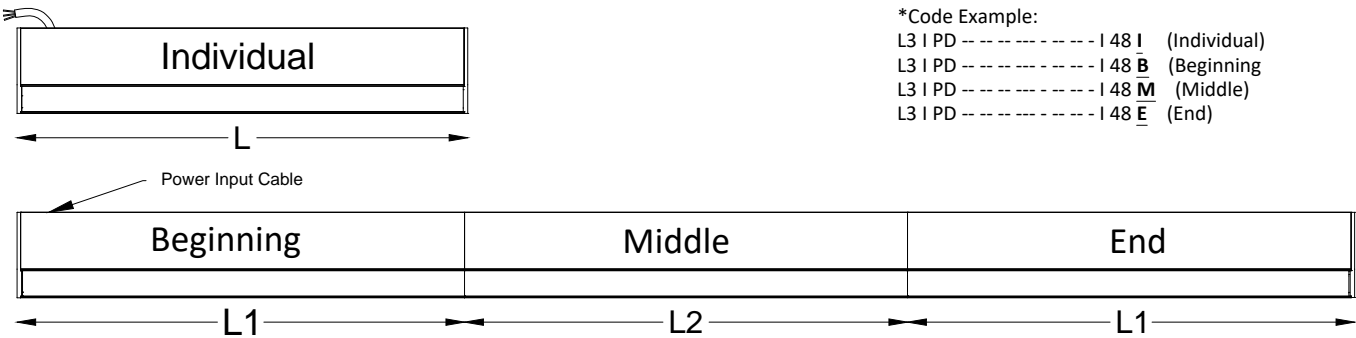

*Code Example:
L3 I PD ----- I 48 I (Individual)
L3 I PD ----- I 48 B (Beginning)
L3 I PD ----- I 48 M (Middle)
L3 I PD ----- I 48 E (End)

Length Code*	L (inch) (Two End Caps)	L1 (inch) (One End Cap)	L2 (inch) (No End Cap)
12	12.01	11.83	11.65
24	23.58	23.41	23.23
36	35.16	34.98	34.80
48	46.73	46.56	46.38
60	58.31	58.13	57.95
70	69.88	69.74	69.53
82	81.46	81.32	81.10
93	93.03	92.89	92.68
105	104.61	108.33	100.39
116	116.18	116.04	115.83

*Code Example: L3 I PD ----- I 48 -



For the continuous make sure not to exceed 600W on a single feeding input.

Annexe B

Asymmetrical optics:

Below section views shows the light direction and the power feeding location for the asymmetrical optic.

