

STARDROP / DARKWAY

PENDANT DIRECT

The stardrop is quite adaptable to well integrate into the space ratio and requirements. The stardrop device can be either ceiling mounted or pendant. The number of spots can be modified in every unit. This product offers high visual comfort, ideal for residential and commercial spaces.

- Clean square light distribution from 25mm round aperture reflectors. The optimal beam angle over field angle ratio offers a highly-uniform horizontal surface
- Flexibility of mounting height with 3 beam angles
- Homogeneous color mixing within one reflector



Luminaire


Application: Ambient
Body Material: Extruded aluminium

Optics


Optic Type: Special Reflector With Microfaceted Surface
Glare Control Device: Cinco Cell Baffles
Surface Diffuser: No Diffuser

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

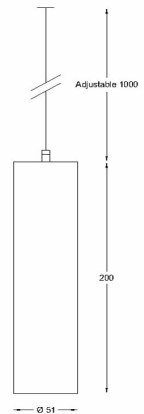


Polar Curves



Narrow Beam 36° LOR:
70.3%



Medium Beam 50° LOR:
90.4%



Wide Beam 60° LOR: 88.5%

We reserve the right to make technical changes without prior notice

STARDROP / DARKWAY

PENDANT DIRECT

Code Index:

<u>S</u> <u>D</u>	<u>I</u>	<u>P</u> <u>D</u>	<u>R</u>	<u>1</u>	<u>D</u>	---	-----	-	<u>2</u> <u>0</u>	---	<u>I</u>	<u>2</u> <u>0</u>
Family	Environment	Mounting	Shape	Number of LED	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length
						SN	927E1	J		BS		
						SM	927E2	K		BT		
						SW	927E3	L		WS		
							930E1			WT		
							930E2			GS		
							930E3					
							940E1					
							940E2					
							940E3					

Family	Environment	Mounting	Shape	Number of LED
SD Stardrop	I Indoor	PD Pendant Direct	R Round	11 LED

Optic	Light Distribution	CRI/CCT & Power	Control
D Darkway	SN Narrow Beam, 36°, Square distribution	LED Load initial Lumen	J Non-dimmable
	2700°K	927E1: 1 W 100 lm	K DALI Dimmable
	SM Medium Beam, 50°, Square distribution	927E2: 1.5 W 140 lm	L 1-10V Dimmable
		927E3: 2 W 180 lm	
	SW Wide Beam, 60°, Square distribution	930E1: 1 W 110 lm	
	3000°K	930E2: 1.5 W 150 lm	
		930E3: 2 W 190 lm	
		940E1: 1 W 110 lm	
	4000°K	940E2: 1.5 W 150 lm	
		940E3: 2 W 200 lm	

IP	Body Finish	Layout	Length
20 IP20	BS Black Smooth	I Shape	20 20 cm
	BT Black Fine Textured		
	WS White Smooth		
	WT White Textured		
	GS Gray Smooth		

We reserve the right to make technical changes without prior notice

