


Product Installation guide



OPERATION TEMPERATURE





MAKE SURE THE Power IS OFF DURING INSTALLATION



220-240V~
50/60 Hz



RISK OF FIRE AND
ELECTRICAL SHOCK





INSTALLATION INSTRUCTIONS

DISCLAIMER

Please read all instructions before beginning installation:


1. Turn off electrical Power before starting the installation of the light fixture.
2. The feeding voltage must not exceed the specified fixture voltage.
3. This product must be installed by an eligible electrician.
4. Make sure the luminaire is mounted to a secure structure. Mounting the fixture in inappropriate way could lead to serious injury.
5. This luminaire is class 1, it must be earthed in a reliable way.
6. Wear gloves and safety glasses at all times when removing the luminaire from carton,installing, servicing or performing maintenance
7. Do not install damaged product! This luminaire is properly packed to avoid being damaged during transit. Inspect to confirm before installation. Any damaged or broken part during or after assembly should be replaced.
8. Unauthorized repairs or modifications will void warranty.

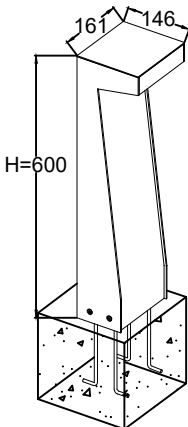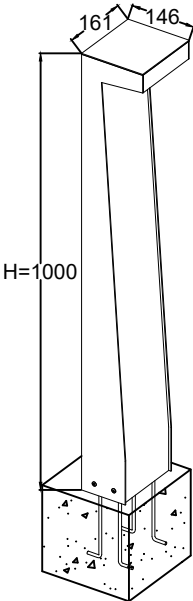

Dimensions in mm


Product Installation guide

1.Prepare the ground level (Make a concrete slab with drainage as per below):

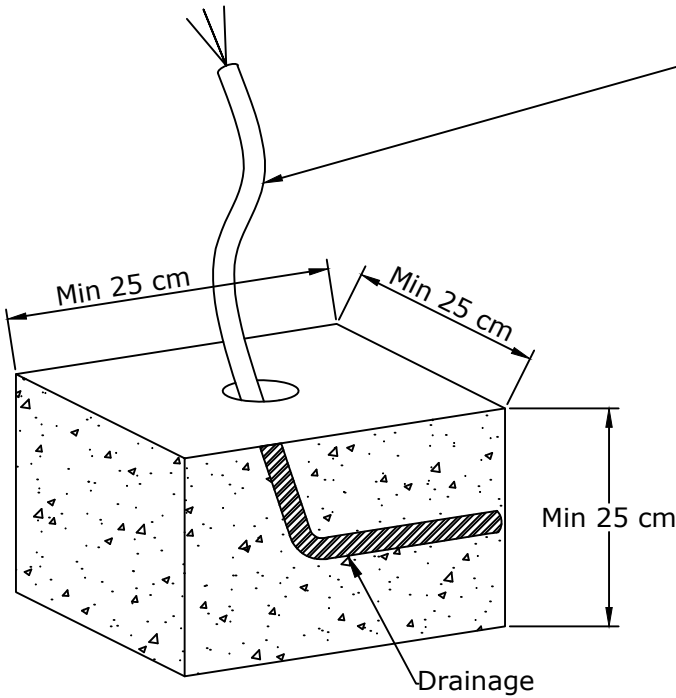


Type	Application	Cable	Note
Non Dimmable	Power	H07RN F 3G1.0 mm ²	L/N/PE
DALI	Power & Control	H07RN F 5G1.0 mm ²	L/N/PE/DA/DA
1-10V	Power	H07RN F 3G1.0 mm ²	L/N/PE
	Control	H07RN F 2x1.0 mm ²	DIM+ / DIM-

2.Install the anchor base In the ground level

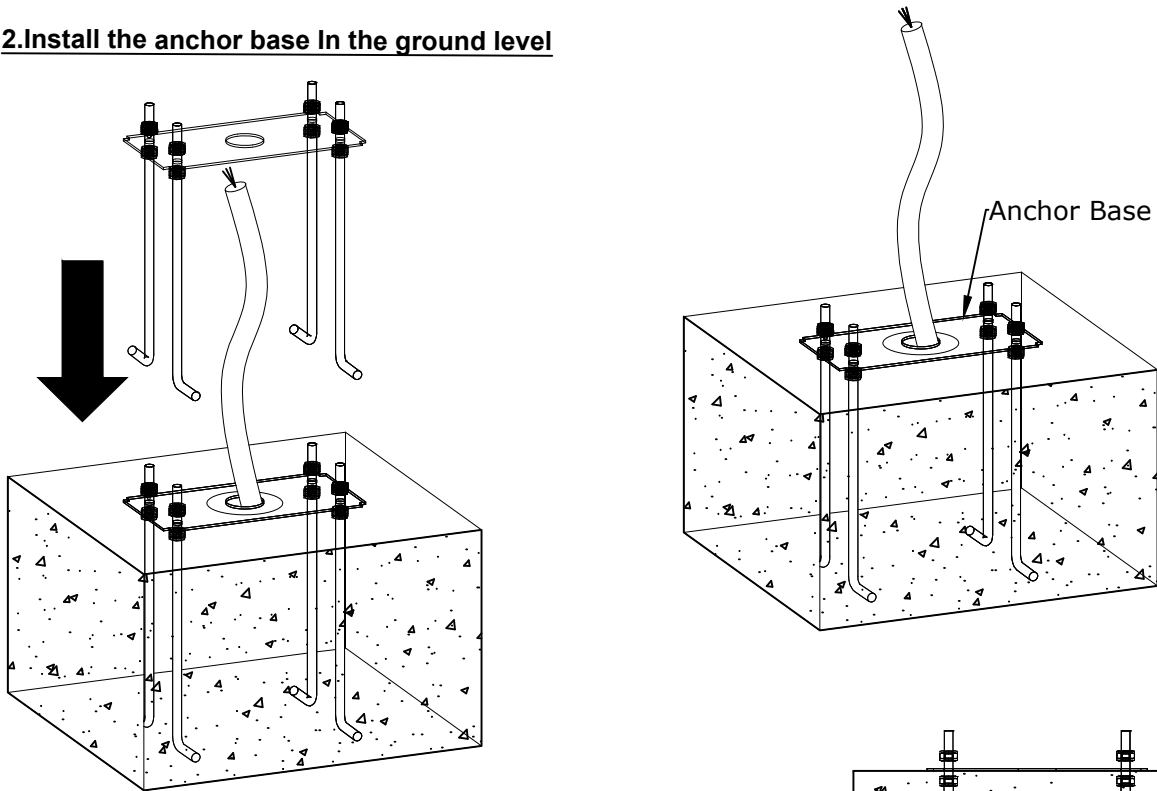


Make sure the cable pass through the hole base
Anchor depth: anchor base should be flushed
with the concrete surface

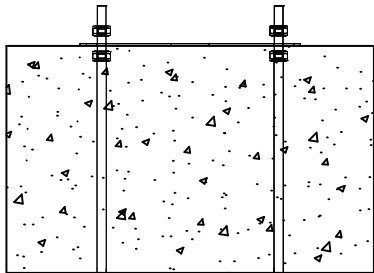


Product Installation guide


3.After concrete is hardened remove the upper nuts

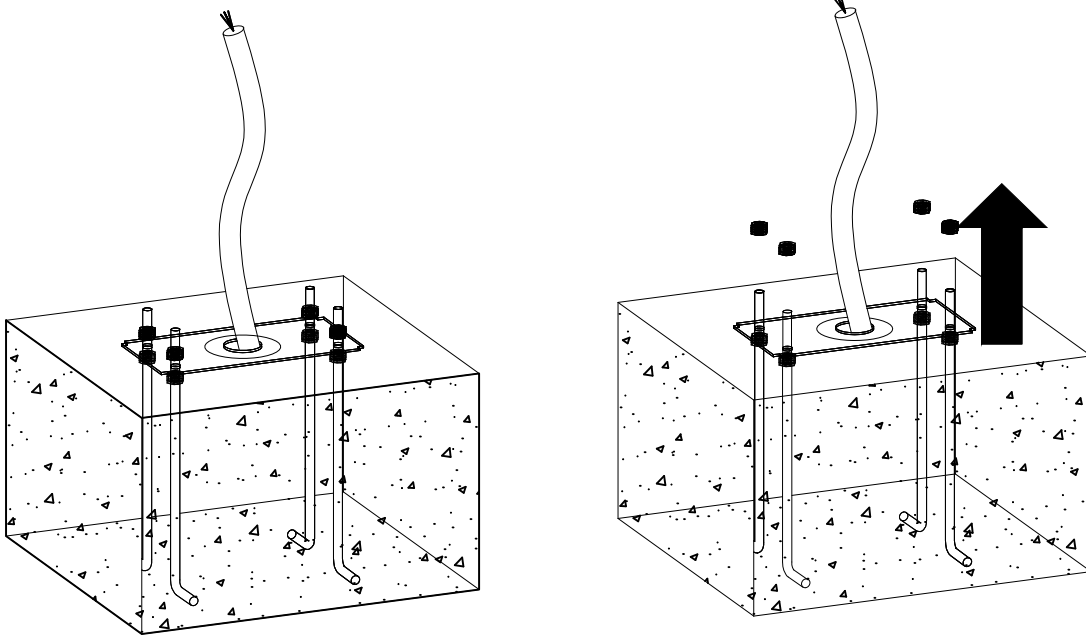

3.Slide the inner base into the anchor base

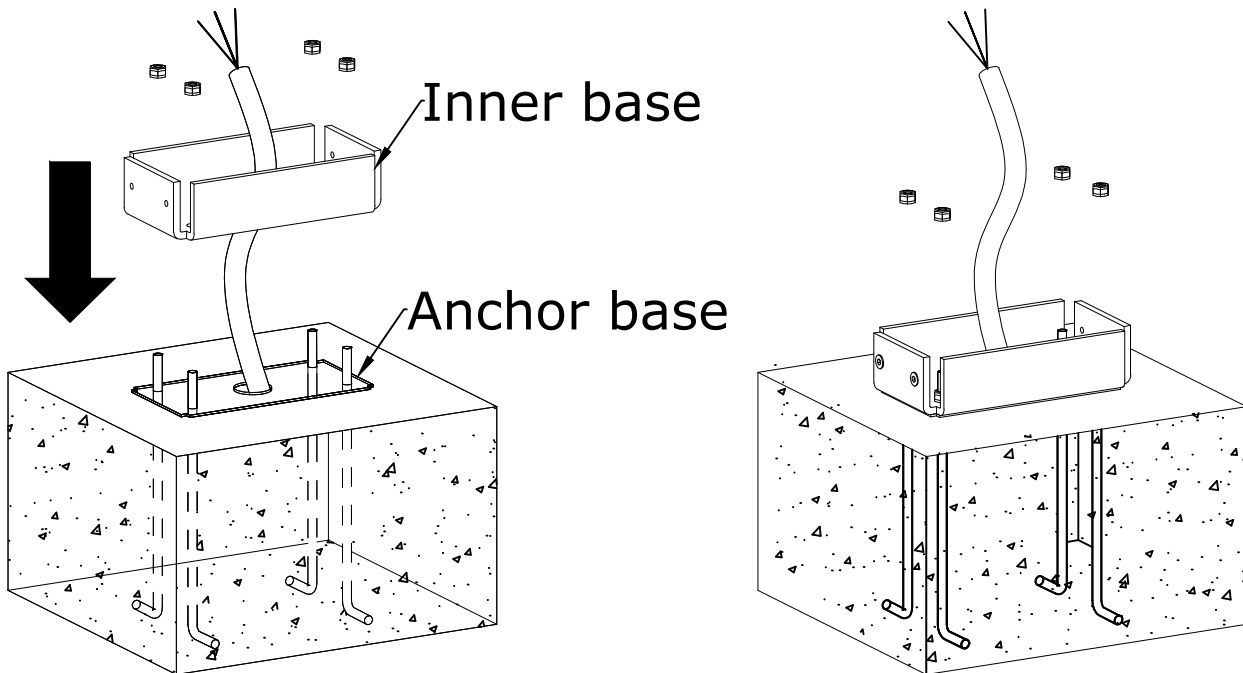



4.Tighten the nuts

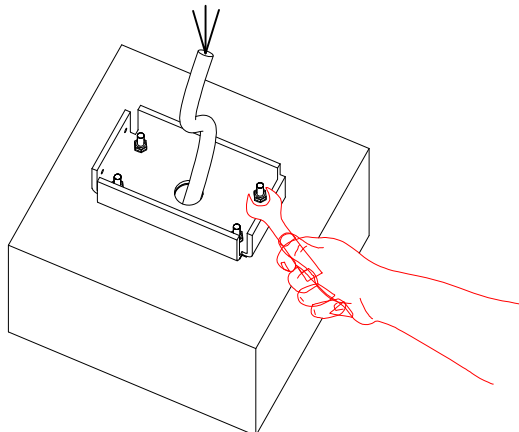

Product Installation guide



5.Connect Power line using waterproof connector

Non Dimmable

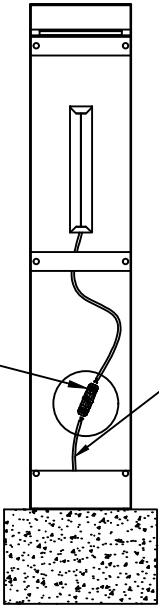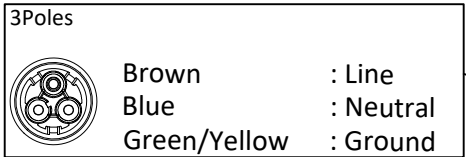

Use cable
H07RN F 3G1.0 mm²

1-10V Dimmable

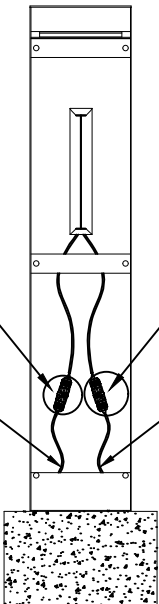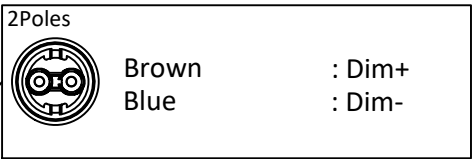

Use cable
H07RN F 3G1.0 mm²

Use cable
H07RN F 2x1.0 mm²

Product Installation guide

Dali Dimmable

5Poles



Brown

:

Line

Blue

:

Neutral

Green/Yellow

:

Ground

Black


:

DALI

Grey


:

DALI

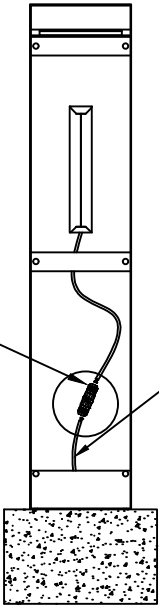

Use cable
H07RN F 5G1.0 mm²

6.Fix and screw in E-Walk fixture using M4 countersunk screw with the base bracket

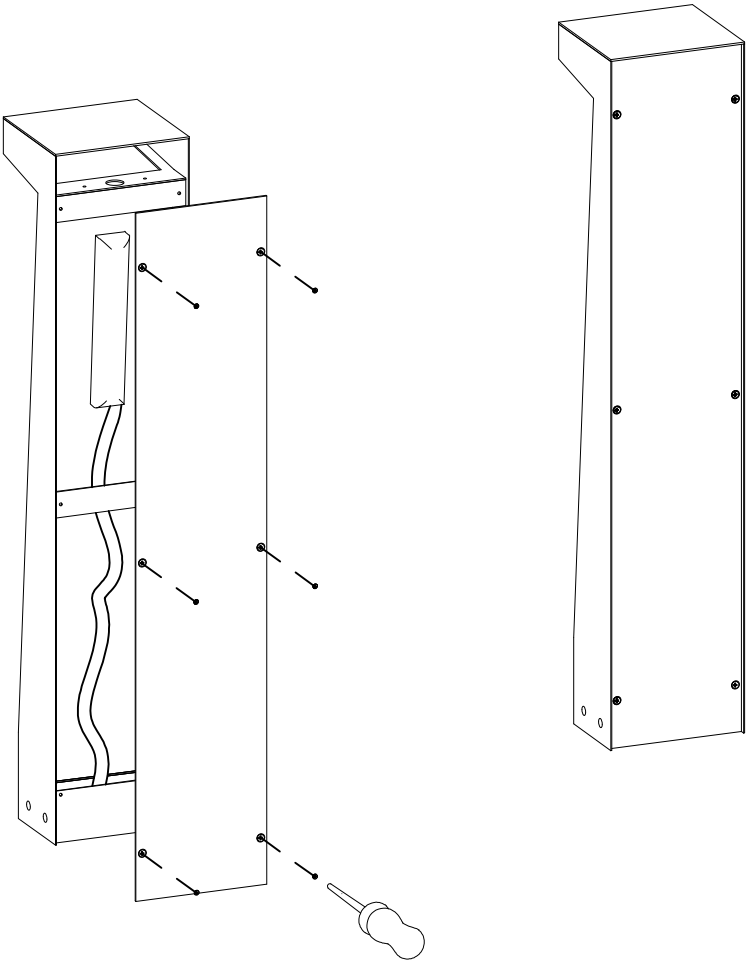

Product Installation guide

7. Fix and screw in E-Walk fixture using M4 countersunk screw with the base bracket

