


LIGHTWAY 6 – OUTDOOR / ASYMMETRICAL LENS WALL RECESSED

The Lightway 6 wall recessed Asymmetrical linear lens is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, This IP 67 element provides homogenous distribution of light over vertical surfaces while achieving a very high output, making it ideal for stairs and hallways lighting applications.

- The flush lens delivers the best wall uniformity. Vertical light uniformity (1:3)
- High output, ideal for vertical surfaces (over 4 meters high lighting applications)
- Wide lateral illumination with minimal cut-off
- 45cm of side walls to minimize unwanted light spillage

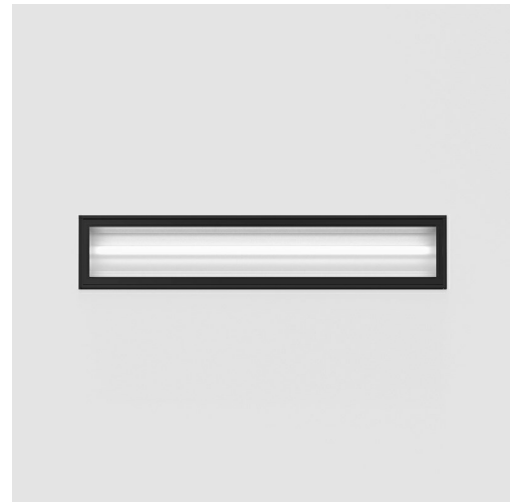

Luminaire

Application: Washer
Body Material: Extruded aluminium
Cutout: Cutout: length + 3mm / width 134mm / depth 105mm

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type: Extruded Asymmetrical Linear Lens
Surface Diffuser: Acrylic Frosted Extruded TIR Lens


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curves

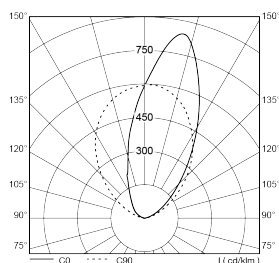

Asymmetrical Lens LOR:
60.8%

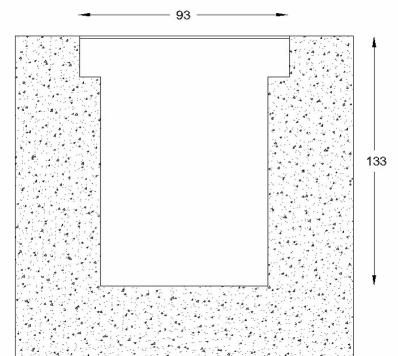

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 – OUTDOOR / ASYMMETRICAL LENS

WALL RECESSED

Code Index:

L 6	O	W R	W L	X X	-----	C	6 7	B T	N	I	--
Family	Environment	Mounting	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length
					927L1						10
					927L2						20
					927L3						30
					930L1						
					930L2						
					930L3						
					940L1						
					940L2						
					940L3						

Family L6 Lightway 6	Environment O Outdoor	Mounting WR Wall Recessed	Optic WL Asymmetrical Lens	Light Distribution XX N/A
--------------------------------	---------------------------------	-------------------------------------	--------------------------------------	-------------------------------------

CRI/CCT & Power	Control C Non-dimmable	IP 67 IP67	Body Finish BT Black Fine Textured
LED Load initial Lumen 2700°K 927L1: 1 W/m 120 lm 927L2: 1.5 W/m 170 lm 927L3: 2.2 W/m 235 lm 927L1: 2 W/m 240 lm 927L2: 3 W/m 340 lm 927L3: 4.4 W/m 470 lm 927L1: 3 W/m 360 lm 927L2: 4.5 W/m 510 lm 927L3: 6.6 W/m 705 lm 3000°K 930L1: 1 W/m 130 lm 930L2: 1.5 W/m 180 lm 930L3: 2.2 W/m 250 lm 930L1: 2 W/m 260 lm 930L2: 3 W/m 360 lm 930L3: 4.4 W/m 500 lm 930L1: 3 W/m 390 lm 930L2: 4.5 W/m 540 lm 930L3: 6.6 W/m 750 lm 4000°K 940L1: 1 W/m 130 lm 940L2: 1.5 W/m 180 lm 940L3: 2.2 W/m 255 lm 940L1: 2 W/m 260 lm 940L2: 3 W/m 360 lm 940L3: 4.4 W/m 510 lm 940L1: 3 W/m 390 lm 940L2: 4.5 W/m 540 lm 940L3: 6.6 W/m 765 lm	Emergency N No Emergency	Layout I I Shape	Length 10 10 cm 20 20 cm 30 30 cm

We reserve the right to make technical changes without prior notice

