


LIGHTWAY 3 / OPAL RECESSED WITH TRIM

The Lightway 3 PMMA Opal diffuser is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications. This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots. Perfect Lambertian distribution for a soft light effect
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls

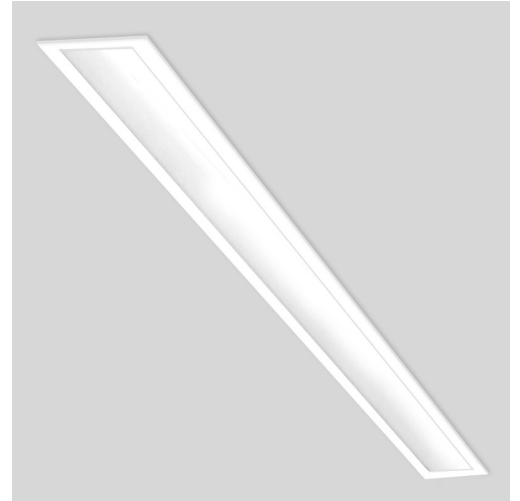

Luminaire

Application: Ambient
Body Material: Extruded aluminium
Cutout: Cutout: length - 11mm / width 38mm / depth 51mm


Optics

Surface Diffuser: Acrylic Opal Diffusing Lens


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curves



Opal LOR: 61.7%

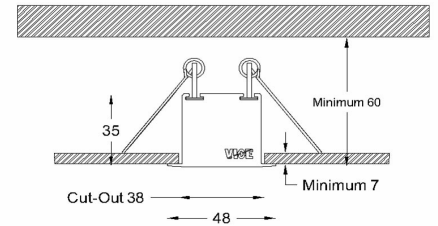

We reserve the right to make technical changes without prior notice

LIGHTWAY 3 / OPAL

RECESSED WITH TRIM

Code Index:

L 3	I	R W	A O	X X	-----	-	2 0	--	I	---	-
Family	Environment	Mounting	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
					927L1	J		BS		30	I
					927L2	K		BT		60	B
					927L3	L		WS		90	M
					930L1	M		WT		120	E
					930L2			GS		150	
					930L3					180	
					940L1					210	
					940L2					240	
					940L3					270	
					9TWT1					300	
					9TWT2						
					9TWT3						

Family	Environment	Mounting	Optic	Light Distribution
L3 Lightway 3	I Indoor	RW Recessed With Trim	AO Opal Diffuser	XX N/A

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.

CRI/CCT & Power	Control	IP	Body Finish
LED Load initial Lumen	J Non-dimmable	20 IP20	BS Black Smooth
2700°K	K DALI Dimmable		BT Black Fine Textured
	L 1-10V Dimmable		WS White Smooth
	M Remote driver, Phase dimming		WT White Textured
			GS Gray Smooth
3000°K			
4000°K			
Tunable White			
80-2700			
80-3000			
80-4000			

Layout	Length	Wiring
I I Shape	30 30 cm	I Individual
	60 60 cm	B Beginning
	90 90 cm	M Middle
	120 120 cm	E End
	150 150 cm	
	180 180 cm	
	210 210 cm	
	240 240 cm	
	270 270 cm	
	300 300 cm	

We reserve the right to make technical changes without prior notice

