

# **LIGHTWAY 3 - PENDANT DIRECT/INDIRECT**

Product Installation Guide


# **WARNING:**THE SAFETY OF THIS FIXTURE IS GUARANTEED ONLY WHEN COMPLYING WITH THE FOLLOWING INSTRUCTIONS



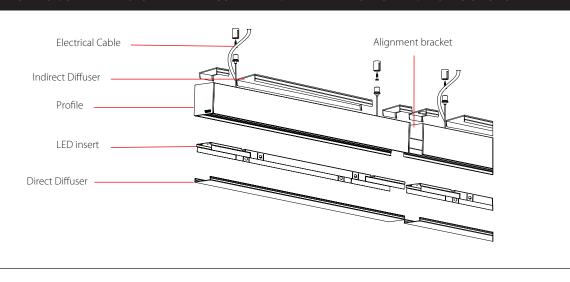

## FOLLOW THE BELOW STEPS TO INSURE A PROPER INSTALLATION


**STEP 1:** Unscrew the suspension parts.






**Applicable surfaces:** 


Stone Concrete Metal Wood



# STEP 3: Installation of profile

- A- Screw on the screws slightly to stop the lateral movement of the bracket.
- B Remove the top cover from the profile using the scraper.
- C Insert the electrical cable into the profile, the assemble the cover.
- D Connect the mains cable to the input terminal block and control when applicable.







# **LIGHTWAY 3 - PENDANT DIRECT/INDIRECT**

Product Installation Guide


#### NOTE:

- 1 Always wear cotton gloves to avoid fingerprints mark on the product.
- 2 Make sure to place all dismounted items in a safe and clean area to avoid any possible damage.
- 3 LED should be protected from any possible electrostatic discharge (ESD) source.

#### For a continuous run:

Connect the feeding connectors together to provide a through wiring for the power and control when applicable

## **Terminal block options:**

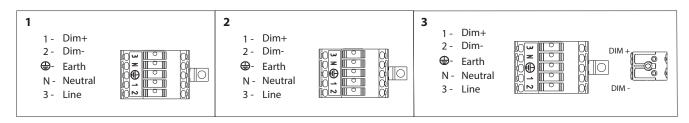

<sup>\*</sup> Apply silicon on the edges of the profile after joining them to fill all gaps and remove light spill.

\* Make sure not to exceed the maximum allowable running length according to the below table:

| Maximum running length through 1 feeding input |                   |        |        |        |        |        |
|--|-------------------|--------|--------|--------|--------|--------|
| System   | Voltage           | Power  |        |        |        |        |
|  |                   | L1     | L2     | L3     | L4     | L5     |
|  |                   | 10 W/m | 15 W/m | 22 W/m | 30 W/m | 42 W/m |
| UL   | 120VAC - 60 Hz    | 135 ft | 100 ft | 70 ft  | 50 ft  | 36 ft  |
| CE   | 220VAC - 50/60 Hz | 62 m   | 45 m   | 33 m   | 23 m   | 17 m   |

warning:

projects@vicelighting.com - www.vicelighting.com - www.vicelighting.com - lebanon 11-0125 - Beirut +961 1 486311 - France 75013 Paris +33 01 55 04 10 00

- THE FEEDING VOLTAGE SHOULD NOT EXCEED THE SPECIFIED FIXTUE VOLTAGE.
- DO NOT INSTALL THE FIXTURE IF DAMAGED
- UNAUTHORIZED REPAIRS OR MODIFICATIONS WILL VOID WARRANTY

