

LIGHTWAY 6 / BATWING

SURFACE MOUNTED

The Lightway 6 Batwing Lens provides uniform horizontal surfaces™ illumination, suppressing central hot spots and allowing greater on-center fixture spacing. When faced with low heights, the batwing lens offers full coverage with maximum distance between the luminaires. When used for indirect lighting, it provides great coverage with minimal distance from the ceiling.

- Batwing distribution allowing:
 - o Wide area coverage
 - o Large spacing between luminaires
 - o Suitable for low-suspension heights
- Ideal for illuminating vertical surfaces in general lighting applications to reduce contrast



Luminaire


Application: Ambient
Body Material: Extruded aluminium

Optics

Optic Type: PMMA Batwing Linear Lens
Surface Diffuser: Acrylic Frosted Extruded Refractive Lens

Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

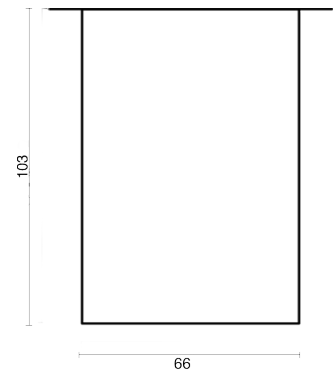

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / BATWING

SURFACE MOUNTED

Code Index:

L 6	I	S M	A L	X X	-----	-	2 0	--	N	I	---	-
Family	Environment	Mounting	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C		BS			30	I
					927L2	D		BT			60	B
					927L3	E		WS			90	M
					927L4	F		WT			120	E
					927L5			GS			150	
					930L1						180	
					930L2						210	
					930L3						240	
					930L4						270	
					930L5						300	
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							
					9TWT1							
					9TWT2							
					9TWT3							

- Family**
L6 Lightway 6
- Environment**
I Indoor
- Mounting**
SM Surface Mounted
- Optic**
AL Batwing Lens
- Light Distribution**
XX N/A

We reserve the right to make technical changes without prior notice



LIGHTWAY 6 / BATWING

SURFACE MOUNTED

CRI/CCT & Power

		LED Load	initial Lumen
2700°K	927L1:	10 W/m	1500 lm/m
	927L2:	14 W/m	2100 lm/m
	927L3:	20 W/m	2900 lm/m
	927L4:	31 W/m	4300 lm/m
	927L5:	40 W/m	5800 lm/m
3000°K	930L1:	10 W/m	1600 lm/m
	930L2:	14 W/m	2170 lm/m
	930L3:	20 W/m	3000 lm/m
	930L4:	31 W/m	4350 lm/m
	930L5:	40 W/m	6000 lm/m
4000°K	940L1:	10 W/m	1650 lm/m
	940L2:	14 W/m	2300 lm/m
	940L3:	20 W/m	3150 lm/m
	940L4:	31 W/m	4600 lm/m
	940L5:	40 W/m	6300 lm/m
Tunable White	9TWT1:	10 W/m	1500 lm/m
	9TWT2:	14 W/m	2100 lm/m
	9TWT3:	20 W/m	2900 lm/m

Control

- C** Non-dimmable
- D** DALI Dimmable
- E** 1-10V Dimmable
- F** Built-in driver, phase dimming

IP

- 20** IP20

Body Finish

- BS** Black Smooth
- BT** Black Fine Textured
- WS** White Smooth
- WT** White Textured
- GS** Gray Smooth

Emergency

- N** No Emergency

Layout

- I** I Shape

Length

- 30** 30 cm
- 60** 60 cm
- 90** 90 cm
- 120** 120 cm
- 150** 150 cm
- 180** 180 cm
- 210** 210 cm
- 240** 240 cm
- 270** 270 cm
- 300** 300 cm

Wiring

- I** Individual
- B** Beginning
- M** Middle
- E** End

We reserve the right to make technical changes without prior notice