

LIGHTWAY 6 – OUTDOOR / CUT-OFF WASHER WALL RECESSED

The Lightway 6 wall recessed Cut-Off washer is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, This IP 67 element provides homogenous distribution of light over vertical surfaces while achieving a very high output, making it ideal for stairs and hallways lighting applications.

- True wall wash distribution. Vertical light uniformity (1:4)
- Optimized cut-off: blocking the backward and longitudinal light spill (glarefree)
- Homogeneous color mixing within one reflector cell
- A minimum of 10 cm from side walls to prevent unwanted light spillage



Luminaire

Application:	Washer
Body Material:	Extruded aluminium
Cutout:	Cutout: length + 3mm / width 134mm / depth 105mm

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type:	Metallized Faceted Reflectors
Glare Control Device:	Micro Structured PMMA Lens
Surface Diffuser:	Acrylic Micro Lenticular Structure Diffuser


Electrical equipment

Mains Voltage:	220–240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

Polar Curve



LOR: 58.85%

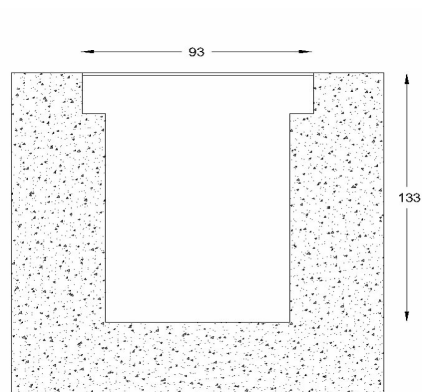

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 – OUTDOOR / CUT-OFF WASHER

WALL RECESSED

Code Index:

L 6	O	W R	W O	X X	-----	C	6 7	B T	N	I	--
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length
					927M1						10
					927M2						20
					927M3						30
					930M1						
					930M2						
					930M3						
					940M1						
					940M2						
					940M3						

Family
L6 Lightway 6

Environment
O Outdoor

Mounting
WR Wall Recessed

Optic
WO Cut-off Washer

Beam Angle
XX N/A

CRI/CCT & Power			Control		IP		Body Finish	
	LED Load	initial Lumen	C Non-dimmable		67 IP67		BT Black Fine Textured	
2700°K	927M1:	2 W/m						
	927M2:	3 W/m						
	927M3:	4.4 W/m						
	927M1:	4 W						
	927M2:	6 W						
	927M3:	8.8 W/m						
	927M1:	8 W/m						
	927M2:	12 W/m						
	927M3:	16.8 W/m						
3000°K	930M1:	2 W/m						
	930M2:	3 W/m						
	930M3:	4.4 W/m						
	930M1:	4 W						
	930M2:	6 W						
	930M3:	8.8 W/m						
	930M1:	8 W/m						
	930M2:	12 W/m						
	930M3:	16.8 W/m						
4000°K	940M1:	2 W/m						
	940M2:	3 W/m						
	940M3:	4.4 W/m						
	940M1:	4 W						
	940M2:	6 W						
	940M3:	8.8 W/m						
	940M1:	8 W/m						
	940M2:	12 W/m						
	940M3:	16.8 W/m						

Emergency
N No Emergency

Layout
I I Shape

Length
10 10 cm
20 20 cm
30 30 cm

We reserve the right to make technical changes without prior notice