

LIGHTWAY 6 / DIAMOND PRISM

PENDANT DIRECT / INDIRECT

The Lightway 6 Direct/Indirect linear system offers numerous combinations of optics and output options. A well-lit ceiling improves the look of the workspace without having to compromise on the efficiency.

The diamond-like prism structure provides an excellent light brilliance and precision with great glare reduction (UGR<19) and superior vertical/horizontal illumination.

- Good glare control (UGR<19). Ideal for the workplace
- High efficiency luminaire: 70% LOR
- Homogeneous glare reduction in all C-levels



Luminaire

Application: Ambient
Body Material: Extruded aluminium


Optics

Glare Control Device: Diamond Prismatic Optic Structure
Surface Diffuser: Acrylic Clear Micro-diamond Prismatic Structure

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve




LOR: 76.3%

Indirect Polar Curve



LOR: 74.8%

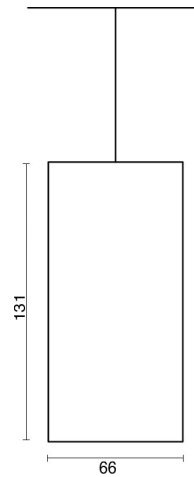

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / DIAMOND PRISM

PENDANT DIRECT / INDIRECT

Code Index:

<u>L 6</u>	<u>I</u>	<u>P B</u>	<u>A D</u>	<u>X X</u>	-----	-	---	---	<u>N</u>	<u>I</u>	---	-
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	CRI/CCT & Power Indirect	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C	O1	BS			60	I
					927L2	D	O2	BT			90	B
					927L3	E	O3	WS			120	M
					927L4		B1	WT			150	E
					927L5		B2	GS			180	
					930L1		B3				210	
					930L2						240	
					930L3						270	
					930L4						300	
					930L5							
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							
					9TWT1							
					9TWT2							
					9TWT3							

Family	Environment	Mounting	Optic	Beam Angle
L6 Lightway 6	I Indoor	PB Pendant Direct & Indirect	AD Diamond Prism	XX N/A

CRI/CCT & Power	Control	CRI/CCT & Power Indirect	Body Finish
<p>LED Load initial Lumen</p> <p>2700°K</p> <p>927L1: 10 W/m 1200 lm/m</p> <p>927L2: 15 W/m 1650 lm/m</p> <p>927L3: 22 W/m 2150 lm/m</p> <p>927L4: 30 W/m 3250 lm/m</p> <p>927L5: 42 W/m 4300 lm/m</p> <hr/> <p>3000°K</p> <p>930L1: 10 W/m 1350 lm/m</p> <p>930L2: 15 W/m 1900 lm/m</p> <p>930L3: 22 W/m 2550 lm/m</p> <p>930L4: 30 W/m 3800 lm/m</p> <p>930L5: 42 W/m 5100 lm/m</p> <hr/> <p>4000°K</p> <p>940L1: 10 W/m 1450 lm/m</p> <p>940L2: 15 W/m 2050 lm/m</p> <p>940L3: 22 W/m 2700 lm/m</p> <p>940L4: 30 W/m 4050 lm/m</p> <p>940L5: 42 W/m 5400 lm/m</p> <hr/> <p>Tunable White</p> <p>9TWT1: 10 W/m 1350 lm/m</p> <p>9TWT2: 15 W/m 1850 lm/m</p> <p>9TWT3: 22 W/m 2450 lm/m</p>	<p>C Built-in driver, non-dimmable</p> <p>D Built-in driver, DALI</p> <p>E Built-in driver, 1-10V</p>	<p>LED Load initial Lumen</p> <p>2700°K</p> <p>O1: Opal 10 W/m 1200 lm/m</p> <p>O2: Opal 15 W/m 1650 lm/m</p> <p>O3: Opal 22 W/m 2150 lm/m</p> <hr/> <p>3000°K</p> <p>O1: Opal 10 W/m 1350 lm/m</p> <p>O2: Opal 15 W/m 1900 lm/m</p> <p>O3: Opal 22 W/m 2550 lm/m</p> <hr/> <p>4000°K</p> <p>O1: Opal 10 W/m 1450 lm/m</p> <p>O2: Opal 15 W/m 2050 lm/m</p> <p>O3: Opal 22 W/m 2700 lm/m</p> <hr/> <p>Tunable White</p> <p>O1: Opal 10 W/m 1350 lm/m</p> <p>O2: Opal 15 W/m 1850 lm/m</p> <p>O3: Opal 22 W/m 2450 lm/m</p>	<p>BS Black Smooth</p> <p>BT Black Textured</p> <p>WS White Smooth</p> <p>WT White Textured</p> <p>GS Gray Smooth</p>

Emergency	Layout	Length	Wiring
N No Emergency	I I Shape	60 60 cm	I Individual
		90 90 cm	B Beginning
		120 120 cm	M Middle
		150 150 cm	E End
		180 180 cm	
		210 210 cm	
		240 240 cm	
		270 270 cm	
		300 300 cm	

We reserve the right to make technical changes without prior notice

