

# LIGHTWAY 6 / ELLIPTICAL NARROW LENS

## RECESSED TRIMLESS

The Lightway 6 - with its powerful and efficient Elliptical Narrow Lens - provides homogeneous vertical surface grazing and works perfectly on high vertical surfaces for both indoor and outdoor applications.

- Wide lateral beam spread for high ceiling applications, over 4m height. Emphasizes contrast effects on textured surfaces
- 5 to 10cm from the edge of fixture to the surface of the wall
- Install to within 45cm of side walls to minimize spill



### Luminaire

**Application:** Grazer  
**Body Material:** Extruded aluminium  
**Cutout:** Cutout: length + 3mm / width 61mm / depth 120.5mm


### Optics

**Optic Type:** PMMA Linear Narrow Lens  
**Surface Diffuser:** Acrylic Frosted Extruded TIR Lens


### Electrical equipment

**Mains Voltage:** 220-240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

### Polar Curve




LOR: 82.3%

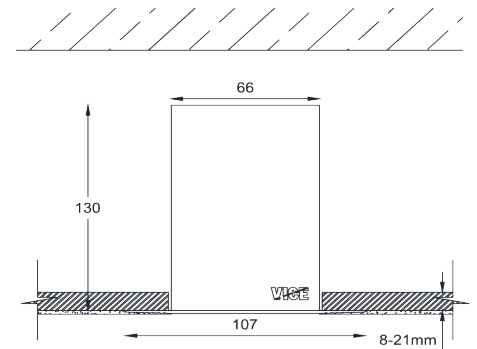

We reserve the right to make technical changes without prior notice

# LIGHTWAY 6 / ELLIPTICAL NARROW LENS RECESSED TRIMLESS

## Mounting Ratio



100 to 150 mm

Setback from the wall is defined by wall texture and height. Consult factory for optimal setback according to your project conditions.

*We reserve the right to make technical changes without prior notice*

# LIGHTWAY 6 / ELLIPTICAL NARROW LENS

## RECESSED TRIMLESS

### Code Index:

<u>L 6</u>	<u>I</u>	<u>R T</u>	<u>GL</u>	<u>XX</u>	-----	-	<u>2 0</u>	<u>WS</u>	<u>N</u>	<u>I</u>	---	-
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C					30	I
					927L2	D					60	B
					927L3	E					90	M
					927L4						120	E
					927L5						150	
					930L1						180	
					930L2						210	
					930L3						240	
					930L4						270	
					930L5						300	
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							
					9TWT1							
					9TWT2							
					9TWT3							

Family	Environment	Mounting	Optic	Beam Angle
L6 Lightway 6	I Indoor	RT Recessed Trimless	GL Elliptical Narrow Lens	XX N/A

CRI/CCT & Power	Control	IP	Body Finish	Emergency
LED Load initial Lumen	C Non-dimmable	20 IP20	WS White Smooth	N No Emergency
2700°K	D DALI Dimmable			
927L1: 10 W/m 1200 lm/m	D DALI Type 8			
927L2: 15 W/m 1650 lm/m	E 1-10V Dimmable			
927L3: 22 W/m 2150 lm/m				
927L4: 30 W/m 3250 lm/m				
927L5: 42 W/m 4300 lm/m				
3000°K				
930L1: 10 W/m 1350 lm/m				
930L2: 15 W/m 1900 lm/m				
930L3: 22 W/m 2550 lm/m				
930L4: 30 W/m 3800 lm/m				
930L5: 42 W/m 5100 lm/m				
4000°K				
940L1: 10 W/m 1450 lm/m				
940L2: 15 W/m 2050 lm/m				
940L3: 22 W/m 2700 lm/m				
940L4: 30 W/m 4050 lm/m				
940L5: 42 W/m 5400 lm/m				
Tunable White				
9TWT1: 10 W/m 1350 lm/m				
9TWT2: 15 W/m 1850 lm/m				
9TWT3: 22 W/m 2450 lm/m				

We reserve the right to make technical changes without prior notice

# LIGHTWAY 6 / ELLIPTICAL NARROW LENS RECESSED TRIMLESS

## Layout

II Shape

## Length

**30** 30 cm

**60** 60 cm

**90** 90 cm

**120** 120 cm

**150** 150 cm

**180** 180 cm

**210** 210 cm

**240** 240 cm

**270** 270 cm

**300** 300 cm

## Wiring

**I** Individual

**B** Beginning

**M** Middle

**E** End

## Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.