

LIGHTWAY 6 / ELLIPTICAL NARROW LENS

RECESSED TRIMLESS

The Lightway 6 – with its powerful and efficient Elliptical Narrow Lens – provides homogeneous vertical surface grazing and works perfectly on high vertical surfaces for both indoor and outdoor applications.

- Wide lateral beam spread for high ceiling applications, over 4m height. Emphasizes contrast effects on textured surfaces
- 5 to 10cm from the edge of fixture to the surface of the wall
- Install to within 45cm of side walls to minimize spill



Luminaire

Product Type: Grazer
Body Material: Extruded aluminium


Optics

Optic Type: PMMA Linear Narrow Lens
Surface diffuser: Acrylic Frosted Extruded TIR Lens

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curves




LOR: 82.3%

Mounting Ratio



100 to 150 mm

Setback from the wall is defined by wall texture and height. Consult factory for optimal setback according to your project conditions.

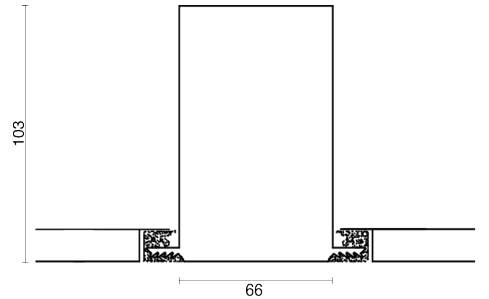

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / ELLIPTICAL NARROW LENS

RECESSED TRIMLESS

Code Index:

<u>L 6</u>	<u>I</u>	<u>R T</u>	<u>G L</u>	<u>X X</u>	<u>2 0</u>	<u>W S</u>	<u>N</u>	<u>I</u>	<u>---</u>	<u>---</u>		
Family	Environment	Mounting	Application	Beam Angle	CRI/CCT & Power	Dimming	IP	Body finish	Emergency	Layout	Length	Wiring
					927L1		C				30	I
					927L2		D				60	B
					927L3		E				90	M
					927L4		F				120	E
					927L5						150	
					930L1						180	
					930L2						210	
					930L3						240	
					930L4						270	
					930L5						300	
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							
					9TWT1							
					9TWT2							
					9TWT3							

Family | Environment | Mounting | Application | Beam Angle

L6 Lightway 6 | I Indoor | RT Recessed Trimless | GL Elliptical Narrow Lens | XX N/A

CRI/CCT & Power	Dimming	IP	Body finish	Emergency
<p>LED Load initial Lumen</p> <p>2700°K</p> <p>927L1: 10 W/m 1200 lm/m</p> <p>927L2: 15 W/m 1650 lm/m</p> <p>927L3: 22 W/m 2150 lm/m</p> <p>927L4: 30 W/m 3250 lm/m</p> <p>927L5: 42 W/m 4300 lm/m</p> <hr/> <p>3000°K</p> <p>930L1: 10 W/m 1350 lm/m</p> <p>930L2: 15 W/m 1900 lm/m</p> <p>930L3: 22 W/m 2550 lm/m</p> <p>930L4: 30 W/m 3800 lm/m</p> <p>930L5: 42 W/m 5100 lm/m</p> <hr/> <p>4000°K</p> <p>940L1: 10 W/m 1450 lm/m</p> <p>940L2: 15 W/m 2050 lm/m</p> <p>940L3: 22 W/m 2700 lm/m</p> <p>940L4: 30 W/m 4050 lm/m</p> <p>940L5: 42 W/m 5400 lm/m</p> <hr/> <p>Tunable White</p> <p>9TWT1: 10 W/m 1350 lm/m</p> <p>9TWT2: 15 W/m 1850 lm/m</p> <p>9TWT3: 22 W/m 2450 lm/m</p>	<p>C Built-in driver, non dimmable</p> <p>D Built-in driver, DALI</p> <p>E Built-in driver, 1-10V</p> <p>F Built-in driver, Phase dim</p>	20 IP20	WS White Smooth	N No Emergency

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / ELLIPTICAL NARROW LENS RECESSED TRIMLESS

Layout

I I Shape

Length

30 30 cm

60 60 cm

90 90 cm

120 120 cm

150 150 cm

180 180 cm

210 210 cm

240 240 cm

270 270 cm

300 300 cm

Wiring

I Individual

B Beginning

M Middle

E End

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.

We reserve the right to make technical changes without prior notice