

LIGHTWAY 6 / ELLIPTICAL NARROW LENS

WALL MOUNTED DIRECT

The Lightway 6 - with its powerful and efficient Elliptical Narrow Lens - provides homogeneous vertical surface grazing and works perfectly on high vertical surfaces for both indoor and outdoor applications.

- Wide lateral beam spread for high ceiling applications, over 4m height. Emphasizes contrast effects on textured surfaces
- 5 to 10cm from the edge of fixture to the surface of the wall
- Install to within 45cm of side walls to minimize spill



Luminaire

Application: Grazer
Body Material: Extruded aluminium


Optics

Optic Type: PMMA Linear Narrow Lens
Surface Diffuser: Acrylic Frosted Extruded TIR Lens


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve



LOR: 82.3%

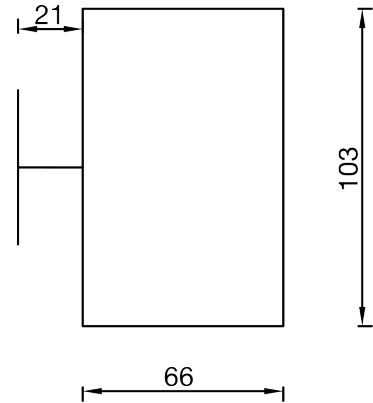

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / ELLIPTICAL NARROW LENS

WALL MOUNTED DIRECT

Code Index:

<u>L 6</u>	<u>I</u>	<u>W D</u>	<u>GL</u>	<u>XX</u>	-----	<u>2 0</u>	--	<u>N</u>	<u>I</u>	---	--	
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C		BS			30	I
					927L2	D		BT			60	B
					927L3	E		WS			90	M
					927L4			WT			120	E
					927L5			GS			150	
					930L1						180	
					930L2						210	
					930L3						240	
					930L4						270	
					930L5						300	
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							
					9TWT1							
					9TWT2							
					9TWT3							

Family	Environment	Mounting	Optic	Beam Angle
L6 Lightway 6	I Indoor	WD Wall Mounted, Direct	GL Elliptical Narrow Lens	XX N/A

CRI/CCT & Power	Control	IP	Body Finish	Emergency																																																																			
<table border="0"> <tr> <td></td> <td>LED Load</td> <td>initial Lumen</td> <td></td> <td></td> </tr> <tr> <td rowspan="5">2700°K</td> <td>927L1:</td> <td>10 W/m</td> <td>1200 lm/m</td> <td rowspan="5"> C Built-in driver, non-dimmable D Built-in driver, DALI E Built-in driver, 1-10V </td> <td rowspan="5"> 20 IP20 </td> <td rowspan="5"> BS Black Smooth BT Black Textured WS White Smooth WT White Textured GS Gray Smooth </td> <td rowspan="5"> N No Emergency </td> </tr> <tr> <td>927L2:</td> <td>15 W/m</td> <td>1650 lm/m</td> </tr> <tr> <td>927L3:</td> <td>22 W/m</td> <td>2150 lm/m</td> </tr> <tr> <td>927L4:</td> <td>30 W/m</td> <td>3250 lm/m</td> </tr> <tr> <td>927L5:</td> <td>42 W/m</td> <td>4300 lm/m</td> </tr> <tr> <td rowspan="5">3000°K</td> <td>930L1:</td> <td>10 W/m</td> <td>1350 lm/m</td> </tr> <tr> <td>930L2:</td> <td>15 W/m</td> <td>1900 lm/m</td> </tr> <tr> <td>930L3:</td> <td>22 W/m</td> <td>2550 lm/m</td> </tr> <tr> <td>930L4:</td> <td>30 W/m</td> <td>3800 lm/m</td> </tr> <tr> <td>930L5:</td> <td>42 W/m</td> <td>5100 lm/m</td> </tr> <tr> <td rowspan="5">4000°K</td> <td>940L1:</td> <td>10 W/m</td> <td>1450 lm/m</td> </tr> <tr> <td>940L2:</td> <td>15 W/m</td> <td>2050 lm/m</td> </tr> <tr> <td>940L3:</td> <td>22 W/m</td> <td>2700 lm/m</td> </tr> <tr> <td>940L4:</td> <td>30 W/m</td> <td>4050 lm/m</td> </tr> <tr> <td>940L5:</td> <td>42 W/m</td> <td>5400 lm/m</td> </tr> <tr> <td rowspan="3">Tunable White</td> <td>9TWT1:</td> <td>10 W/m</td> <td>1350 lm/m</td> </tr> <tr> <td>9TWT2:</td> <td>15 W/m</td> <td>1850 lm/m</td> </tr> <tr> <td>9TWT3:</td> <td>22 W/m</td> <td>2450 lm/m</td> </tr> </table>		LED Load	initial Lumen			2700°K	927L1:	10 W/m	1200 lm/m	C Built-in driver, non-dimmable D Built-in driver, DALI E Built-in driver, 1-10V	20 IP20	BS Black Smooth BT Black Textured WS White Smooth WT White Textured GS Gray Smooth	N No Emergency	927L2:	15 W/m	1650 lm/m	927L3:	22 W/m	2150 lm/m	927L4:	30 W/m	3250 lm/m	927L5:	42 W/m	4300 lm/m	3000°K	930L1:	10 W/m	1350 lm/m	930L2:	15 W/m	1900 lm/m	930L3:	22 W/m	2550 lm/m	930L4:	30 W/m	3800 lm/m	930L5:	42 W/m	5100 lm/m	4000°K	940L1:	10 W/m	1450 lm/m	940L2:	15 W/m	2050 lm/m	940L3:	22 W/m	2700 lm/m	940L4:	30 W/m	4050 lm/m	940L5:	42 W/m	5400 lm/m	Tunable White	9TWT1:	10 W/m	1350 lm/m	9TWT2:	15 W/m	1850 lm/m	9TWT3:	22 W/m	2450 lm/m				
	LED Load	initial Lumen																																																																					
2700°K	927L1:	10 W/m	1200 lm/m	C Built-in driver, non-dimmable D Built-in driver, DALI E Built-in driver, 1-10V	20 IP20		BS Black Smooth BT Black Textured WS White Smooth WT White Textured GS Gray Smooth	N No Emergency																																																															
	927L2:	15 W/m	1650 lm/m																																																																				
	927L3:	22 W/m	2150 lm/m																																																																				
	927L4:	30 W/m	3250 lm/m																																																																				
	927L5:	42 W/m	4300 lm/m																																																																				
3000°K	930L1:	10 W/m	1350 lm/m																																																																				
	930L2:	15 W/m	1900 lm/m																																																																				
	930L3:	22 W/m	2550 lm/m																																																																				
	930L4:	30 W/m	3800 lm/m																																																																				
	930L5:	42 W/m	5100 lm/m																																																																				
4000°K	940L1:	10 W/m	1450 lm/m																																																																				
	940L2:	15 W/m	2050 lm/m																																																																				
	940L3:	22 W/m	2700 lm/m																																																																				
	940L4:	30 W/m	4050 lm/m																																																																				
	940L5:	42 W/m	5400 lm/m																																																																				
Tunable White	9TWT1:	10 W/m	1350 lm/m																																																																				
	9TWT2:	15 W/m	1850 lm/m																																																																				
	9TWT3:	22 W/m	2450 lm/m																																																																				

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / ELLIPTICAL NARROW LENS

WALL MOUNTED DIRECT

Layout	Length	Wiring
II Shape	30 30 cm	I Individual
	60 60 cm	B Beginning
	90 90 cm	M Middle
	120 120 cm	E End
	150 150 cm	
	180 180 cm	
	210 210 cm	
	240 240 cm	
	270 270 cm	
	300 300 cm	

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.