

# LIGHTWAY 6 / ELLIPTICAL NARROW LENS

## PENDANT DIRECT

The Lightway 6 - with its powerful and efficient Elliptical Narrow Lens - provides homogeneous vertical surface grazing and works perfectly on high vertical surfaces for both indoor and outdoor applications.

- Wide lateral beam spread for high ceiling applications, over 4m height. Emphasizes contrast effects on textured surfaces
- 5 to 10cm from the edge of fixture to the surface of the wall
- Install to within 45cm of side walls to minimize spill



### Luminaire

**Application:** Grazer  
**Body Material:** Extruded aluminium


### Optics

**Optic Type:** PMMA Linear Narrow Lens  
**Surface Diffuser:** Acrylic Frosted Extruded TIR Lens

### Electrical equipment

**Mains Voltage:** 220-240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

### Polar Curve




LOR: 82.3%

### Mounting Ratio



100 to 150 mm

Setback from the wall is defined by wall texture and height. Consult factory for optimal setback according to your project conditions.

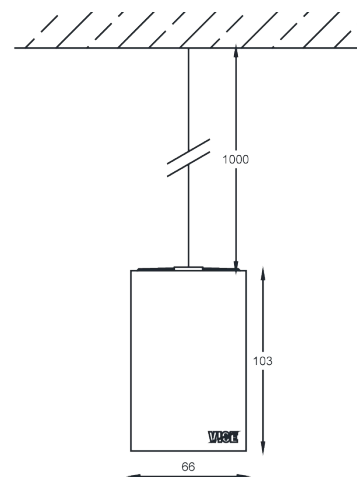

We reserve the right to make technical changes without prior notice

# LIGHTWAY 6 / ELLIPTICAL NARROW LENS PENDANT DIRECT

## Code Index:

<u>L 6</u>	<u>I</u>	<u>P D</u>	<u>GL</u>	<u>---</u>	<u>---</u>	<u>2 0</u>	<u>---</u>	<u>N</u>	<u>I</u>	<u>---</u>	<u>---</u>	<u>XX</u>
Family	Environment	Mounting	Optic	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring	Beam Angle
				927L1	C		BS			60	I	
				927L2	D		BT			90	B	
				927L3	E		WS			120	M	
				927L4			WT			150	E	
				927L5			GS			180		
				930L1						210		
				930L2						240		
				930L3						270		
				930L4						300		
				930L5								
				940L1								
				940L2								
				940L3								
				940L4								
				940L5								
				9TWT1								
				9TWT2								
				9TWT3								

Family	Environment	Mounting	Optic	CRI/CCT & Power
L6 Lightway 6	I Indoor	PD Pendant Direct	GL Elliptical Narrow Lens	LED Load initial Lumen
				2700°K
				927L1: 10 W/m 1200 lm/m
				927L2: 15 W/m 1650 lm/m
				927L3: 22 W/m 2150 lm/m
				927L4: 30 W/m 3250 lm/m
				927L5: 42 W/m 4300 lm/m
				3000°K
				930L1: 10 W/m 1350 lm/m
				930L2: 15 W/m 1900 lm/m
				930L3: 22 W/m 2550 lm/m
				930L4: 30 W/m 3800 lm/m
				930L5: 42 W/m 5100 lm/m
				4000°K
				940L1: 10 W/m 1450 lm/m
				940L2: 15 W/m 2050 lm/m
				940L3: 22 W/m 2700 lm/m
				940L4: 30 W/m 4050 lm/m
				940L5: 42 W/m 5400 lm/m
				Tunable White
				9TWT1: 10 W/m 1350 lm/m
				9TWT2: 15 W/m 1850 lm/m
				9TWT3: 22 W/m 2450 lm/m

Control	IP	Body Finish	Emergency	Layout
C Non-dimmable	20 IP20	BS Black Smooth	N No Emergency	I I Shape
D DALI Dimmable		BT Black Textured		
D DALI Type 8		WS White Smooth		
E 1-10V Dimmable		WT White Textured		
		GS Gray Smooth		

Length	Wiring	Beam Angle
60 60 cm	I Individual	XX N/A
90 90 cm	B Beginning	
120 120 cm	M Middle	
150 150 cm	E End	
180 180 cm		
210 210 cm		
240 240 cm		
270 270 cm		
300 300 cm		

We reserve the right to make technical changes without prior notice



# LIGHTWAY 6 / ELLIPTICAL NARROW LENS PENDANT DIRECT

## Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.

*We reserve the right to make technical changes without prior notice*