


LIGHTWAY 6 / GRAZING BAFFLES

RECESSED WITH TRIM

The Lightway 6 Grazing Baffles are optically engineered to perform best-in-class grazing capabilities. The luminaire offers a tool to emphasize rough-textured surfaces up to 5m high.

The specially-designed aluminum optics are totally glare free from both longitudinal and transversal sides of the profile, achieving a powerful effect ideal for surfaces of great height for indoor applications.

- Best-in-class vertical surface grazing, Scallop-free lighting from zero start point of vertical surfaces
- Glare-free, transversal shielding angle (76°), longitudinal shielding angle (45°)
- 5 to 10cm from edge of fixture to surface of the wall depending on its height and surface relief. Use of continuous fixtures to within 10cm of side walls



Luminaire

Application:	Grazer
Body Material:	Extruded aluminium
Cutout:	Cutout: length – 20mm / width 74mm / depth 121.5mm


Optics

Optic Type:	UV stabilized TIR Lens
Glare Control Device:	Aluminium Anti-Glare Baffles and Linear Glare Shield
Surface Diffuser:	No Diffuser


Electrical equipment

Mains Voltage:	220–240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%


Polar Curve

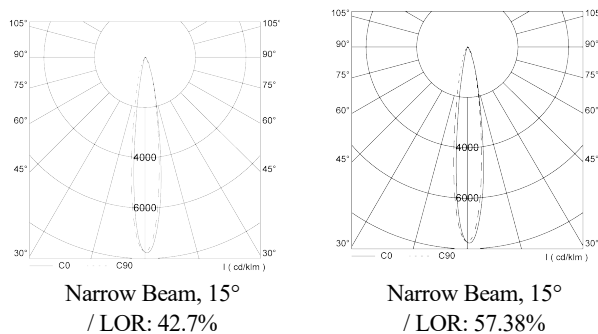

Mounting Ratio

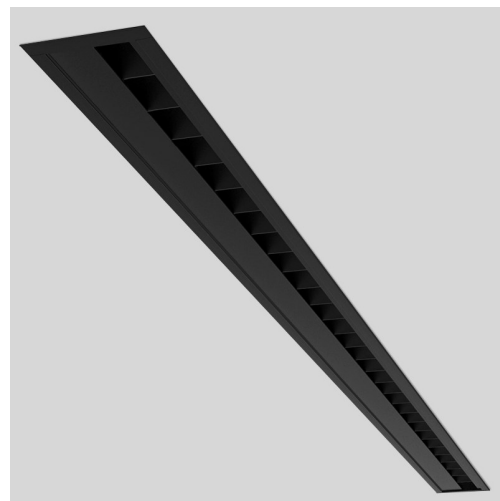

reddot award 2017
winner

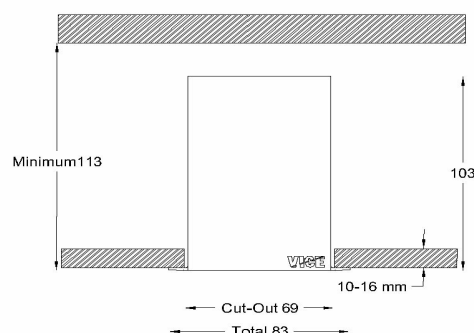

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / GRAZING BAFFLES

RECESSED WITH TRIM



100 to 150 mm

Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / GRAZING BAFFLES

RECESSED WITH TRIM

Code Index:

L 6	I	R W	--	1 5	-----	-	2 0	--	N	I	---	-
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
			GB		9TW	C		BS			30	I
			GG		927N2	D		BT			60	B
			GW		927N4	E		WS			90	M
					927N5			WT			120	E
					930N2			GS			150	
					930N4						180	
					930N5						210	
					940N2						240	
					940N4						270	
					940N5						300	

- Family**
L6 Lightway 6
- Environment**
I Indoor
- Mounting**
RW Recessed With Trim
- Optic**
GB Black Grazing Baffles
GG Gray Grazing Baffles
GW White Grazing Baffles
- Beam Angle**
15 Narrow Beam, 15°

CRI/CCT & Power				Control	IP	Body Finish	
		LED Load	initial Lumen	C Non-dimmable	20 IP20	BS	Black Smooth
2700°K	927N2:	19 W/m	2480 lm/m	D DALI Dimmable		BT	Black Fine Textured
	927N4:	28 W/m	3410 lm/m	D DALI Type 8		WS	White Smooth
	927N5:	35 W/m	4220 lm/m	E 1-10V Dimmable		WT	White Textured
3000°K	930N2:	19 W/m	2650 lm/m			GS	Gray Smooth
	930N4:	28 W/m	3640 lm/m				
	930N5:	35 W/m	4500 lm/m				
4000°K	940N2:	19 W/m	2820 lm/m				
	940N4:	28 W/m	3870 lm/m				
	940N5:	35 W/m	4790 lm/m				
Tunable White	9TWP1:	20 W/m	2560 lm/m				
	9TWP2:	30 W/m	3650 lm/m				
	9TWP3:	42 W/m	4730 lm/m				

- Emergency**
N No Emergency
- Layout**
I I Shape
- Length**
30 30 cm
60 60 cm
90 90 cm
120 120 cm
150 150 cm
180 180 cm
210 210 cm
240 240 cm
270 270 cm
300 300 cm
- Wiring**
I Individual
B Beginning
M Middle
E End

We reserve the right to make technical changes without prior notice

