


# LIGHTWAY 6 – OUTDOOR / ELLIPTICAL NARROW LENS INGROUND SHALLOW

The Lightway 6 Inground elliptical narrow lens is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, this IP67 element benefits from a wide variety of outputs. It provides homogeneous vertical surface grazing and works perfectly on high vertical surfaces.

- Wide lateral beam spread for high ceiling applications, over 4m height. Emphasizes contrast effects on textured surfaces
- 5 to 10cm from the edge of fixture to the surface of the wall
- Install to within 45cm of side walls to minimize spill

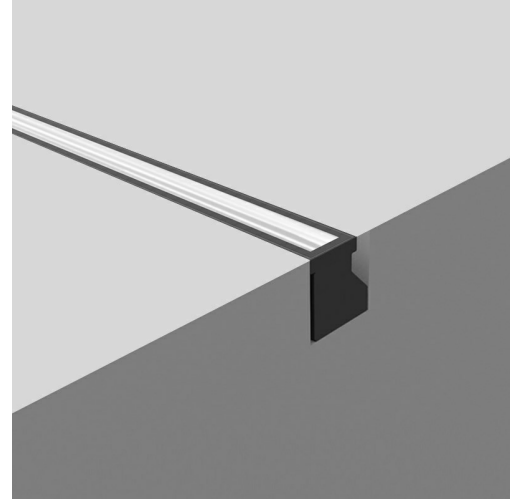

## Luminaire

Application:	Grazer
Body Material:	Extruded aluminium
Glass Cover:	8 mm thickness, Black Silkscreen
Cutout:	Cutout: length + 3mm / width 117mm / depth 114.5mm

## Installation

Operating Temperature: -10 to 50°C


## Optics

Optic Type:	PMMA Linear Narrow Lens
Surface Diffuser:	Acrylic Frosted Extruded TIR Lens

## Electrical equipment


Mains Voltage:	220-240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

## Polar Curve




LOR: 67.95%

## Mounting Ratio

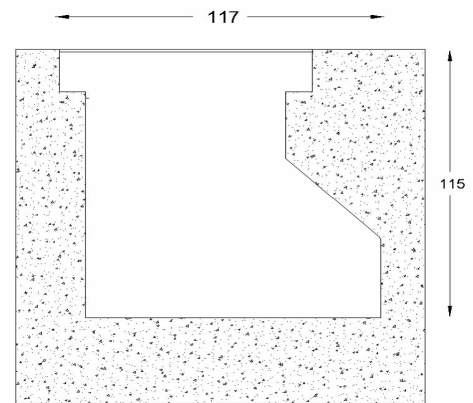

We reserve the right to make technical changes without prior notice

# LIGHTWAY 6 – OUTDOOR / ELLIPTICAL NARROW LENS INGROUND SHALLOW



Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

*We reserve the right to make technical changes without prior notice*

# LIGHTWAY 6 – OUTDOOR / ELLIPTICAL NARROW LENS INGROUND SHALLOW

## Code Index:

<u>L 6</u>	<u>O</u>	<u>I S</u>	<u>GL</u>	<u>XX</u>	-----	-	<u>6 7</u>	<u>BT</u>	<u>N</u>	<u>I</u>	---	-
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C					30	I
					927L2	D					60	B
					927L3	E					90	M
					927L4						120	E
					927L5						150	
					930L1							
					930L2							
					930L3							
					930L4							
					930L5							
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							

**Family**  
L6 Lightway 6

**Environment**  
O Outdoor

**Mounting**  
IS Inground Shallow

**Optic**  
GL Elliptical Narrow Lens

**Beam Angle**  
XX N/A

### CRI/CCT & Power

	LED Load	initial Lumen
<b>2700°K</b>	927L1: 3 W/ft	450 lm/ft
	927L2: 4.2 W/ft	630 lm/ft
	927L3: 6 W/ft	870 lm/ft
	927L4: 9.3 W/ft	1290 lm/ft
<b>3000°K</b>	930L1: 3 W/ft	480 lm/ft
	930L2: 4.2 W/ft	651 lm/ft
	930L3: 6 W/ft	900 lm/ft
	930L4: 9.3 W/ft	1305 lm/ft
<b>4000°K</b>	940L1: 3 W/ft	495 lm/ft
	940L2: 4.2 W/ft	690 lm/ft
	940L3: 6 W/ft	945 lm/ft
	940L4: 9.3 W/ft	1380 lm/ft

### Control

C Non-dimmable  
D DALI Dimmable  
E 1-10V Dimmable

### IP

67 IP67

### Body Finish

BT Black Fine Textured

### Emergency

N No Emergency

### Layout

I I Shape

### Length

30 30 cm  
60 60 cm  
90 90 cm  
120 120 cm  
150 150 cm

### Wiring

I Individual  
B Beginning  
M Middle  
E End

We reserve the right to make technical changes without prior notice