

LIGHTWAY 6 / GRAZING BAFFLES PENDANT DIRECT

The Lightway 6 Grazing Baffles are optically engineered to perform best-in-class grazing capabilities. The luminaire offers a tool to emphasize rough-textured surfaces up to 5m high.

The specially-designed aluminum optics are totally glare free from both longitudinal and transversal sides of the profile, achieving a powerful effect ideal for surfaces of great height for indoor applications.

- Best-in-class vertical surface grazing, Scallop-free lighting from zero start point of vertical surfaces
- Glare-free, transversal shielding angle (76°), longitudinal shielding angle (45°)
- 5 to 10cm from edge of fixture to surface of the wall depending on its height and surface relief. Use of continuous fixtures to within 10cm of side walls



Luminaire

Application: Grazer
Body Material: Extruded aluminium


Optics

Optic Type: UV stabilized TIR Lens
Glare Control Device: Aluminium Anti-Glare Baffles and Linear Glare Shield
Surface Diffuser: No Diffuser


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%


Polar Curve




Narrow Beam, 15°
/ LOR: 42.7%



Narrow Beam, 15°
/ LOR: 57.38%

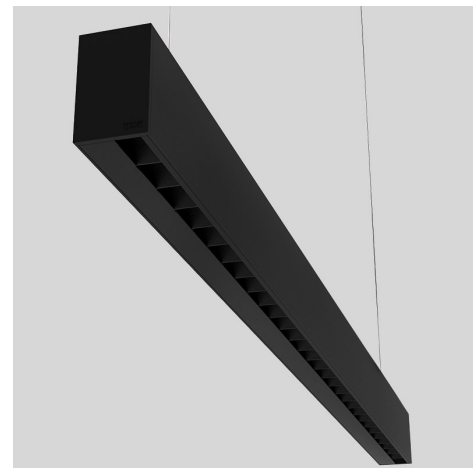

reddot award 2017
winner

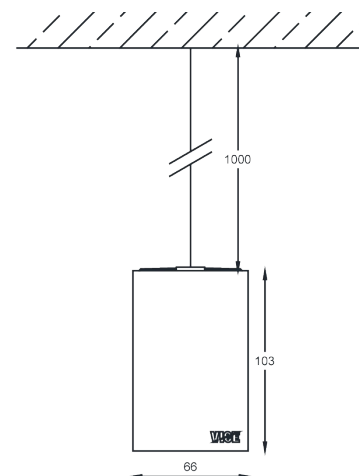


We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / GRAZING BAFFLES

PENDANT DIRECT

Mounting Ratio



100 to 150 mm

Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / GRAZING BAFFLES

PENDANT DIRECT

Code Index:

<u>L 6</u>	<u>I</u>	<u>P D</u>	<u>---</u>	<u>1 5</u>	<u>-----</u>	<u>-</u>	<u>2 0</u>	<u>---</u>	<u>N</u>	<u>I</u>	<u>---</u>	<u>-</u>
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
			GB		927P1	C		BS			60	I
			GG		927P2	D		BT			90	B
			GW		927P3	E		WS			120	M
					930P1			WT			150	E
					930P2			GS			180	
					930P3						210	
					940P1						240	
					940P2						270	
					940P3						300	

Family	Environment	Mounting	Optic	Beam Angle
L6 Lightway 6	Indoor	PD Pendant Direct	GB Black Grazing Baffles GG Gray Grazing Baffles GW White Grazing Baffles	15 Narrow Beam, 15°

CRI/CCT & Power	Control	IP	Body Finish	Emergency
<p>LED Load initial Lumen</p> <p>2700°K 927N2: 19 W/m 2480 lm/m 927N4: 28 W/m 3410 lm/m 927N5: 35 W/m 4220 lm/m</p> <p>3000°K 930N2: 19 W/m 2650 lm/m 930N4: 28 W/m 3640 lm/m 930N5: 35 W/m 4500 lm/m</p> <p>4000°K 940N2: 19 W/m 2820 lm/m 940N4: 28 W/m 3870 lm/m 940N5: 35 W/m 4790 lm/m</p> <p>Tunable White 9TWP1: 20 W/m 2560 lm/m 9TWP2: 30 W/m 3650 lm/m 9TWP3: 42 W/m 4730 lm/m</p>	<p>C Non-dimmable</p> <p>D DALI Dimmable</p> <p>D DALI Type 8</p> <p>E 1-10V Dimmable</p>	20 IP20	<p>BS Black Smooth</p> <p>BT Black Textured</p> <p>WS White Smooth</p> <p>WT White Textured</p> <p>GS Gray Smooth</p>	N No Emergency

Layout	Length	Wiring
II Shape	<p>60 60 cm</p> <p>90 90 cm</p> <p>120 120 cm</p> <p>150 150 cm</p> <p>180 180 cm</p> <p>210 210 cm</p> <p>240 240 cm</p> <p>270 270 cm</p> <p>300 300 cm</p>	<p>I Individual</p> <p>B Beginning</p> <p>M Middle</p> <p>E End</p>

We reserve the right to make technical changes without prior notice