

LIGHTWAY 6 / CUT-OFF WASHER RECESSED WITH TRIM

The Lightway 6 Cut-Off Washer marks a breakthrough in wall washing illumination as it offers different outputs with a flawless surface uniformity while blocking the backward and longitudinal light spill. It is glare- and light-pollution free!

The Lightway 6 Cut-Off Washer is designed to be highly configurable and adaptable to a wide variety of commercial and architectural interior lighting applications.

- True wall wash distribution. Vertical light uniformity (1:4)
- Optimized cut-off: blocking the backward and longitudinal light spill (glare-free)
- Homogeneous color mixing within one reflector cell
- Setback ratio of 1:6
- Continuous rows or individual fixtures
- A minimum of 10 cm from side walls to prevent unwanted light spillage



Luminaire

Product Type: Washer
Body Material: Extruded aluminium


Optics

Optic Type: Metallized Faceted Reflectors
Glare Control Device: Micro Structured PMMA Lens
Surface diffuser: Acrylic Micro Lenticular Structure Diffuser


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curves




LOR: 70.76%

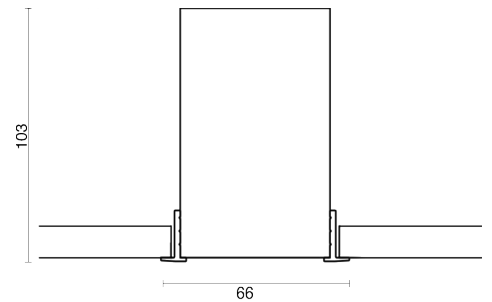

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / CUT-OFF WASHER RECESSED WITH TRIM

Mounting Ratio



Height/6 to Height/5

Setback from the wall is defined by wall texture and height. Consult factory for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / CUT-OFF WASHER

RECESSED WITH TRIM

Code Index:

<u>L 6</u>	<u>I</u>	<u>R W</u>	<u>W O</u>	<u>X X</u>	<u>---</u>	<u>---</u>	<u>2 0</u>	<u>---</u>	<u>N</u>	<u>I</u>	<u>---</u>	<u>---</u>
Family	Environment	Mounting	Application	Beam Angle	CRI/CCT & Power	Dimming	IP	Body finish	Emergency	Layout	Length	Wiring
					927M1	C		BS			30	I
					927M2	D		BT			60	B
					927M3	E		WS			90	M
					930M1	F		WT			120	E
					930M2			GS			150	
					930M3						180	
					940M1						210	
					940M2						240	
					940M3						270	
					9TWD1						300	
					9TWD2							
					9TWD3							

Family | Environment | Mounting | Application | Beam Angle

L6 Lightway 6 | I Indoor | RW Recessed With Trim | WO Cut-off Washer | XX N/A

CRI/CCT & Power	Dimming	IP	Body finish	Emergency
<p>LED Load initial Lumen</p> <p>2700°K 927M1: 28 W/m 2250 lm/m 927M2: 40 W/m 3050 lm/m 927M3: 56 W/m 3950 lm/m</p> <p>3000°K 930M1: 28 W/m 2300 lm/m 930M2: 40 W/m 3150 lm/m 930M3: 56 W/m 4150 lm/m</p> <p>4000°K 940M1: 28 W/m 2500 lm/m 940M2: 40 W/m 3400 lm/m 940M3: 56 W/m 4450 lm/m</p> <p>Tunable White 9TWD1: 14 W/m 2400 lm/m 9TWD2: 20 W/m 3250 lm/m 9TWD3: 28 W/m 4200 lm/m</p>	<p>C Built-in driver, non dimmable D Built-in driver, DALI E Built-in driver, 1-10V F Built-in driver, Phase dim</p>	<p>20 IP20</p>	<p>BS Black Smooth BT Black Textured WS White Smooth WT White Textured GS Gray Smooth</p>	<p>N No Emergency</p>

Layout	Length	Wiring
I I Shape	<p>30 30 cm 60 60 cm 90 90 cm 120 120 cm 150 150 cm 180 180 cm 210 210 cm 240 240 cm 270 270 cm 300 300 cm</p>	<p>I Individual B Beginning M Middle E End</p>

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.

We reserve the right to make technical changes without prior notice