


LIGHTWAY 6 – OUTDOOR / BEAM INGROUND SHALLOW

The Lightway 6 Inground beam is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, this IP67 element benefits from a wide variety of outputs.

The Beam compatible with a wide array of beam angles, generating a powerful overall lighting effect.

- Diverse options of beam angles: very narrow, narrow, medium, wide and elliptic
- Delivers High levels of light

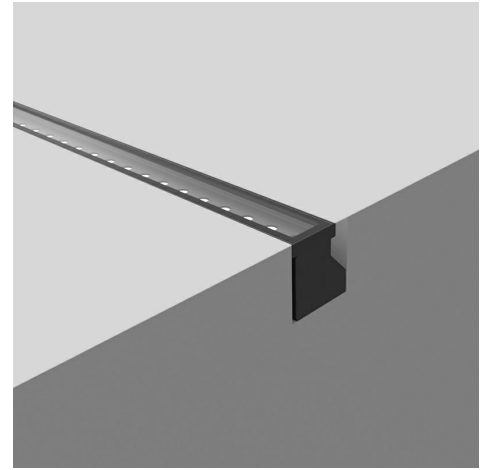

Luminaire

Application:	Ambient
Body Material:	Extruded aluminium
Glass Cover:	Black Serigraphy
Cutout:	Cutout: length + 3mm / width 117mm / depth 114.5mm

Installation

Ambient Temperature: -10 to 40°C


Optics

Optic Type: UV stabilized TIR Lens


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz


Control Gear Efficacy: > 85%

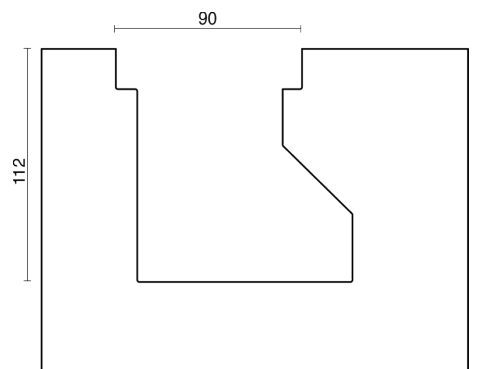


Polar Curve




Medium Beam, 30° /
LOR: 82%




Wide Beam, 45° / LOR: 65%



Elliptical beam 10° x 54° /
LOR: 72%



Narrow Beam, 8° / LOR: 83%



Narrow Beam, 13° /
LOR: 73%

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 – OUTDOOR / BEAM INGROUND SHALLOW

Code Index:

<u>L 6</u>	<u>O</u>	<u>I S</u>	<u>A T</u>	<u>—</u>	<u>— — — — —</u>	<u>—</u>	<u>6 7</u>	<u>—</u>	<u>N</u>	<u>I</u>	<u>— — —</u>	<u>—</u>
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
				08	927P1	C		BS			30	I
				13	927P2	D		WS			60	B
				30	927P3	E		GS			90	M
				45	930P1						120	E
				E1	930P2							
					930P3							
					940P1							
					940P2							
					940P3							
					92701							
					92702							
					92703							
					93001							
					93002							
					93003							
					94001							
					94002							
					94003							

Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency
L6 Lightway 6	O Outdoor	IS Inground Shallow	AT Beam	08 Narrow Beam, 8° 13 Narrow Beam, 13° 30 Medium Beam, 30° 45 Wide Beam, 45° E1 Elliptical beam 10° x 54°	LED Load initial Lumen 92701: 20 W/m 2260 lm/m 92702: 30 W/m 3090 lm/m 92703: 42 W/m 4110 lm/m 927P1: 20 W/m 1700 lm/m 927P2: 30 W/m 2250 lm/m 927P3: 42 W/m 3000 lm/m <hr/> 93001: 20 W/m 2360 lm/m 93002: 30 W/m 3230 lm/m 93003: 42 W/m 4290 lm/m 930P1: 20 W/m 1700 lm/m 930P2: 30 W/m 2400 lm/m 930P3: 42 W/m 3100 lm/m <hr/> 94001: 20 W/m 2550 lm/m 94002: 30 W/m 3500 lm/m 94003: 42 W/m 4640 lm/m 940P1: 20 W/m 1900 lm/m 940P2: 30 W/m 2550 lm/m 940P3: 42 W/m 3300 lm/m	C Built-in driver, non-dimmable D Built-in driver, DALI E Built-in driver, 1-10V	67 IP67	BS Black Smooth WS White Smooth GS Gray Smooth	N No Emergency

Layout	Length	Wiring
I I Shape	30 30 cm 60 60 cm 90 90 cm 120 120 cm	I Individual B Beginning M Middle E End

We reserve the right to make technical changes without prior notice

