

# LIGHTWAY 6 – OUTDOOR / ASYMMETRICAL LENS WALL RECESSED

The Lightway 6 wall recessed Asymmetrical linear lens is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, This IP 67 element provides homogenous distribution of light over vertical surfaces while achieving a very high output, making it ideal for stairs and hallways lighting applications.

- The flush lens delivers the best wall uniformity. Vertical light uniformity (1:3)
- High output, ideal for vertical surfaces (over 4 meters high lighting applications)
- Wide lateral illumination with minimal cut-off
- 45cm of side walls to minimize unwanted light spillage
- IK10



## Luminaire

**Product Type:** Washer  
**Body Material:** Extruded aluminium


## Optics

**Optic Type:** PMMA Asymmetrical Linear Lens  
**Surface diffuser:** Acrylic Frosted Extruded TIR Lens



## Electrical equipment

**Mains Voltage:** 220–240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

## Polar Curves



LOR: 60.83%

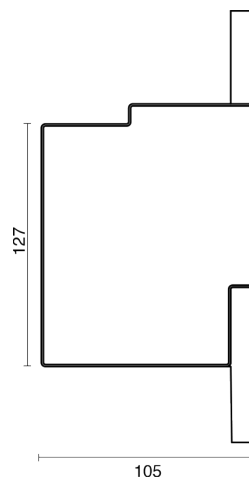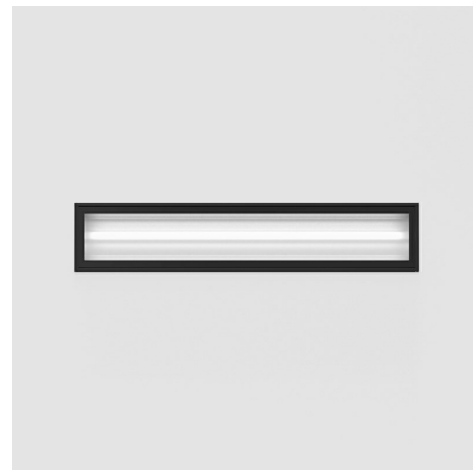

We reserve the right to make technical changes without prior notice

# LIGHTWAY 6 – OUTDOOR / ASYMMETRICAL LENS

## WALL RECESSED

### Code Index:

<u>L 6</u>	<u>O</u>	<u>W R</u>	<u>W L</u>	<u>X X</u>	<u>---</u>	<u>C</u>	<u>6 7</u>	<u>---</u>	<u>N</u>	<u>I</u>	<u>---</u>
Family	Environment	Mounting	Application	Beam Angle	CRI/CCT & Power	Control	IP	Body finish	Emergency	Layout	Length
					927L1			BS			10
					927L2			WS			20
					927L3			GS			30
					930L1						
					930L2						
					930L3						
					940L1						
					940L2						
					940L3						

Family	Environment	Mounting	Application	Beam Angle
L6 Lightway 6	O Outdoor	WR Wall Recessed	WL Asymmetrical Lens	XX N/A

CRI/CCT & Power	Control	IP	Body finish	Emergency
<p>LED Load initial Lumen</p> <p>2700°K</p> <p>927L1: 1 W 120 lm</p> <p>927L2: 15 W 170 lm</p> <p>927L3: 2.2 W 235 lm</p> <p>927L1: 2 W 240 lm</p> <p>927L2: 3 W 340 lm</p> <p>927L3: 4.4 W 470 lm</p> <p>927L1: 3 W 360 lm</p> <p>927L2: 4.5 W 510 lm</p> <p>927L3: 6.6 W 705 lm</p>	C Built-in driver, non-dimmable	67 IP67	<p>BS Black Smooth</p> <p>WS White Smooth</p> <p>GS Gray Smooth</p>	N No Emergency
<p>3000°K</p> <p>930L1: 1 W 130 lm</p> <p>930L2: 15 W 180 lm</p> <p>930L3: 2.2 W 250 lm</p> <p>930L1: 2 W 260 lm</p> <p>930L2: 3 W 360 lm</p> <p>930L3: 4.4 W 500 lm</p> <p>930L1: 3 W 390 lm</p> <p>930L2: 4.5 W 540 lm</p> <p>930L3: 6.6 W 750 lm</p>				
<p>4000°K</p> <p>940L1: 1 W 130 lm</p> <p>940L2: 15 W 180 lm</p> <p>940L3: 2.2 W 255 lm</p> <p>940L1: 2 W 260 lm</p> <p>940L2: 3 W 360 lm</p> <p>940L3: 4.4 W 510 lm</p> <p>940L1: 3 W 390 lm</p> <p>940L2: 4.5 W 540 lm</p> <p>940L3: 6.6 W 765 lm</p>				

Layout	Length
II Shape	10 10 cm
	20 20 cm
	30 30 cm

We reserve the right to make technical changes without prior notice