


LIGHTWAY 6 – OUTDOOR / CUT-OFF WASHER WALL RECESSED

The Lightway 6 wall recessed Cut-Off washer is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, This IP 67 element provides homogenous distribution of light over vertical surfaces while achieving a very high output, making it ideal for stairs and hallways lighting applications.

- True wall wash distribution. Vertical light uniformity (1:4)
- Optimized cut-off: blocking the backward and longitudinal light spill (glarefree)
- Homogeneous color mixing within one reflector cell
- A minimum of 10 cm from side walls to prevent unwanted light spillage

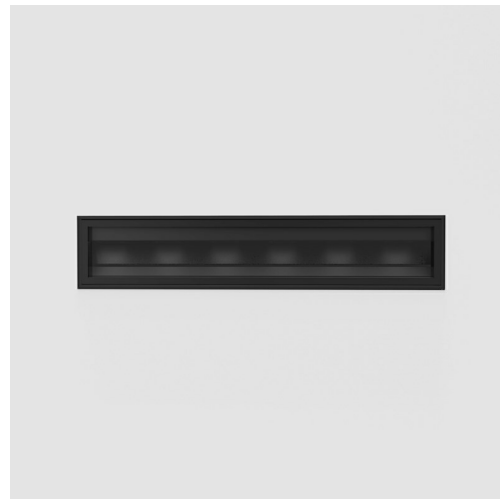

Luminaire

Application:	Washer
Body Material:	Extruded aluminium
Cutout:	Cutout: length + 3mm / width 134mm / depth 105mm

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type:	Metallized Faceted Reflectors
Glare Control Device:	Micro Structured PMMA Lens
Surface Diffuser:	Acrylic Micro Lenticular Structure Diffuser


Electrical equipment

Mains Voltage:	220–240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

Polar Curve



LOR: 58.85%

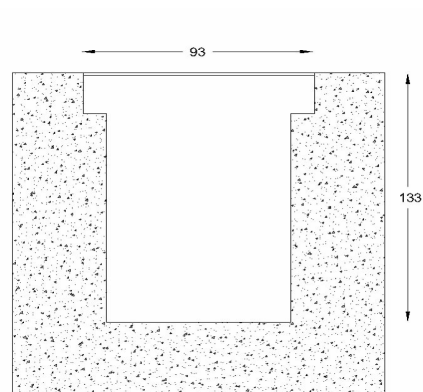

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 – OUTDOOR / CUT-OFF WASHER

WALL RECESSED

Code Index:

L 6	O	W R	W O	X X	-----	C	6 7	B T	N	I	--
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length
					927M1						10
					927M2						20
					927M3						30
					930M1						
					930M2						
					930M3						
					940M1						
					940M2						
					940M3						

Family L6 Lightway 6	Environment O Outdoor	Mounting WR Wall Recessed	Optic WO Cut-off Washer	Beam Angle XX N/A
CRI/CCT & Power	Control C Non-dimmable	IP 67 IP67	Body Finish BT Black Fine Textured	
2700°K	LED Load	initial Lumen		
	927M1:	2 W/m	120 lm	
	927M2:	3 W/m	170 lm	
	927M3:	4.4 W/m	235 lm	
	927M1:	4 W	240 lm	
	927M2:	6 W	340 lm	
	927M3:	8.8 W/m	470 lm	
	927M1:	8 W/m	360 lm	
	927M2:	12 W/m	510 lm	
	927M3:	16.8 W/m	705 lm	
3000°K	930M1:	2 W/m	130 lm	
	930M2:	3 W/m	180 lm	
	930M3:	4.4 W/m	250 lm	
	930M1:	4 W	260 lm	
	930M2:	6 W	360 lm	
	930M3:	8.8 W/m	500 lm	
	930M1:	8 W/m	390 lm	
	930M2:	12 W/m	540 lm	
	930M3:	16.8 W/m	750 lm	
4000°K	940M1:	2 W/m	130 lm	
	940M2:	3 W/m	180 lm	
	940M3:	4.4 W/m	255 lm	
	940M1:	4 W	260 lm	
	940M2:	6 W	360 lm	
	940M3:	8.8 W/m	510 lm	
	940M1:	8 W/m	390 lm	
	940M2:	12 W/m	540 lm	
	940M3:	16.8 W/m	765 lm	
	Emergency N No Emergency	Layout I I Shape	Length 10 10 cm 20 20 cm 30 30 cm	

We reserve the right to make technical changes without prior notice

