


# LIGHTWAY 5 / OPAL RECESSED TRIMLESS

The Lightway 5 PMMA Opal diffuser is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications.

This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots. Perfect Lambertian distribution for a soft light effect
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls
- Great color mixing capability

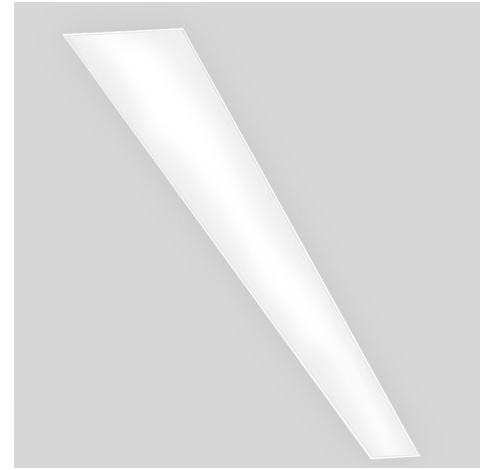

## Luminaire


**Product Type:** Ambient  
**Body Material:** Extruded aluminium

## Optics


**Optic Type:** PMMA Opal Lens  
**Surface diffuser:** Acrylic Opal Diffusing Lens

## Electrical equipment

**Mains Voltage:** 220-240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

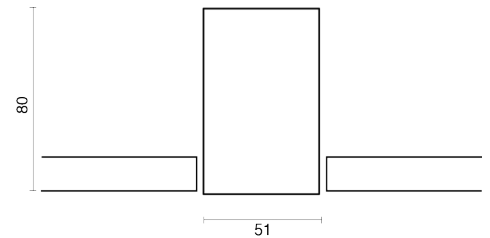

## Polar Curves



LOR: 63.8%

# LIGHTWAY 5 / OPAL RECESSED TRIMLESS

## Code Index:

<u>L</u> <u>5</u>	<u>I</u>	<u>R</u> <u>T</u>	<u>A</u> <u>O</u>	<u>X</u> <u>X</u>	<u>2</u> <u>0</u>	<u>W</u> <u>S</u>	<u>N</u>	<u>I</u>	<u>---</u>	<u>---</u>		
Family	Environment	Mounting	Application	Beam Angle	CRI/CCT & Power	Dimming	IP	Body finish	Emergency	Layout	Length	Wiring
					927L1	C					30	I
					927L2	D					60	B
					927L3	E					90	M
					927L4						120	E
					927L5						150	
					930L1						180	
					930L2						210	
					930L3						240	
					930L4						270	
					930L5						300	
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							
					9TWT1							
					9TWT2							
					9TWT3							

<b>Family</b>	<b>Environment</b>	<b>Mounting</b>	<b>Application</b>	<b>Beam Angle</b>
L5 Lightway 5	I Indoor	RT Recessed Trimless	AO Opal Diffuser	XX N/A

<b>CRI/CCT &amp; Power</b>	<b>Dimming</b>	<b>IP</b>	<b>Body finish</b>	<b>Emergency</b>
<p>LED Load initial Lumen</p> <p>2700°K</p> <p>927L1: 10 W/m 1200 lm/m</p> <p>927L2: 15 W/m 1650 lm/m</p> <p>927L3: 22 W/m 2150 lm/m</p> <p>927L4: 30 W/m 3250 lm/m</p> <p>927L5: 42 W/m 4300 lm/m</p> <hr/> <p>3000°K</p> <p>930L1: 10 W/m 1350 lm/m</p> <p>930L2: 15 W/m 1900 lm/m</p> <p>930L3: 22 W/m 2550 lm/m</p> <p>930L4: 30 W/m 3800 lm/m</p> <p>930L5: 42 W/m 5100 lm/m</p> <hr/> <p>4000°K</p> <p>940L1: 10 W/m 1450 lm/m</p> <p>940L2: 15 W/m 2050 lm/m</p> <p>940L3: 22 W/m 2700 lm/m</p> <p>940L4: 30 W/m 4050 lm/m</p> <p>940L5: 42 W/m 5400 lm/m</p> <hr/> <p>Tunable White</p> <p>9TWT1: 10 W/m 1350 lm/m</p> <p>9TWT2: 15 W/m 1850 lm/m</p> <p>9TWT3: 22 W/m 2450 lm/m</p>	<p>C Built-in driver, non dimmable</p> <p>D Built-in driver, DALI</p> <p>E Built-in driver, 1-10V</p>	20 IP20	WS White Smooth	N No Emergency

We reserve the right to make technical changes without prior notice

# LIGHTWAY 5 / OPAL RECESSED TRIMLESS

## Layout

I I Shape

## Length

**30** 30 cm

**60** 60 cm

**90** 90 cm

**120** 120 cm

**150** 150 cm

**180** 180 cm

**210** 210 cm

**240** 240 cm

**270** 270 cm

**300** 300 cm

## Wiring

**I** Individual

**B** Beginning

**M** Middle

**E** End

*We reserve the right to make technical changes without prior notice*