

LIGHTWAY 5 / PRISMATIC OPAL

PENDANT DIRECT / INDIRECT

The Lightway 5 Direct/Indirect linear system offers numerous combinations of optics and output options. A well-lit ceiling improves the look of the workspace without having to compromise on the efficiency. The diamond-like prism structure provides an excellent light brilliance and precision with great glare reduction (UGR<19) and superior vertical/horizontal illumination.

- Good glare control (UGR<19). Ideal for the workplace.
- High efficiency luminaire: 70% LOR
- Homogeneous glare reduction in all C-levels



Luminaire

Product Type: Ambient
Body Material: Extruded aluminium

Optics

Optic Type: PMMA Prismatic
Glare Control Device: Diamond Prismatic Optic Structure
Surface diffuser: Acrylic Clear Micro-diamond Prismatic Structure


Indirect Optic

Indirect Optic Type: PMMA Opal Lens

Electrical equipment


Mains Voltage: 220–240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curves




LOR: 62.2%

Indirect Polar Curves



LOR: 77.8%

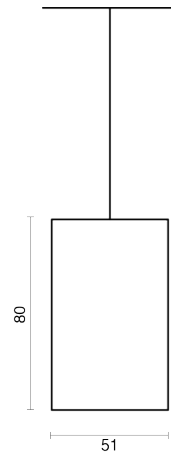

We reserve the right to make technical changes without prior notice

LIGHTWAY 5 / PRISMATIC OPAL

PENDANT DIRECT / INDIRECT

Code Index:

| <u>L</u> <u>5</u> | <u>I</u> | <u>P</u> <u>B</u> | <u>A</u> <u>D</u> | <u>X</u> <u>X</u> | --- | --- | --- | <u>N</u> | <u>I</u> | --- | --- | |
|-------------------|-------------|-------------------|-------------------|-------------------|-----------------|---------|--------------------------|-------------|-----------|--------|--------|--------|
| Family | Environment | Mounting | Application | Beam Angle | CRI/CCT & Power | Control | CRI/CCT & Power Indirect | Body finish | Emergency | Layout | Length | Wiring |
| | | | | | 927L1 | C | O1 | BS | | | 60 | I |
| | | | | | 927L2 | D | O2 | BT | | | 90 | B |
| | | | | | 927L3 | E | O3 | WS | | | 120 | M |
| | | | | | 927L4 | | | WT | | | 150 | E |
| | | | | | 927L5 | | | GS | | | 180 | |
| | | | | | 930L1 | | | | | | 210 | |
| | | | | | 930L2 | | | | | | 240 | |
| | | | | | 930L3 | | | | | | 270 | |
| | | | | | 930L4 | | | | | | 300 | |
| | | | | | 930L5 | | | | | | | |
| | | | | | 940L1 | | | | | | | |
| | | | | | 940L2 | | | | | | | |
| | | | | | 940L3 | | | | | | | |
| | | | | | 940L4 | | | | | | | |
| | | | | | 940L5 | | | | | | | |
| | | | | | 9TWT1 | | | | | | | |
| | | | | | 9TWT2 | | | | | | | |
| | | | | | 9TWT3 | | | | | | | |
| | | | | | 927O1 | | | | | | | |
| | | | | | 927O2 | | | | | | | |
| | | | | | 927O3 | | | | | | | |
| | | | | | 930O1 | | | | | | | |
| | | | | | 930O2 | | | | | | | |
| | | | | | 930O3 | | | | | | | |
| | | | | | 940O1 | | | | | | | |
| | | | | | 940O2 | | | | | | | |
| | | | | | 940O3 | | | | | | | |

| Family | Environment | Mounting | Application | Beam Angle |
|---------------|-------------|------------------------------|-------------------|------------|
| L5 Lightway 5 | I Indoor | PB Pendant Direct & Indirect | AD Prismatic Opal | XX N/A |

| CRI/CCT & Power | | | Control | CRI/CCT & Power Indirect | | | Body finish | | |
|-----------------|---------------|---------------|-----------|--|-------------|---------------|-------------|-----------|--|
| | LED Load | initial Lumen | | | LED Load | initial Lumen | | | |
| 2700°K | 927L1: | 10 W/m | 1200 lm/m | C Built-in driver, non-dimmable D Built-in driver, DALI E Built-in driver, 1-10V | 2700°K | O1: | Opal 10 W/m | 1200 lm/m | BS Black Smooth BT Black Textured WS White Smooth WT White Textured GS Gray Smooth |
| | 927L2: | 15 W/m | 1650 lm/m | | | O2: | Opal 15 W/m | 1650 lm/m | |
| | 927L3: | 22 W/m | 2150 lm/m | | | O3: | Opal 22 W/m | 2150 lm/m | |
| | 927L4: | 30 W/m | 3250 lm/m | | 3000°K | O1: | Opal 10 W/m | 1350 lm/m | |
| | 927L5: | 42 W/m | 4300 lm/m | | | O2: | Opal 15 W/m | 1900 lm/m | |
| 3000°K | 930L1: | 10 W/m | 1350 lm/m | O3: | Opal 22 W/m | 2550 lm/m | | | |
| | 930L2: | 15 W/m | 1900 lm/m | 4000°K | O1: | Opal 10 W/m | 1450 lm/m | | |
| | 930L3: | 22 W/m | 2550 lm/m | | O2: | Opal 15 W/m | 2050 lm/m | | |
| | 930L4: | 30 W/m | 3800 lm/m | | O3: | Opal 22 W/m | 2700 lm/m | | |
| | 930L5: | 42 W/m | 5100 lm/m | Tunable White | O1: | Opal 10 W/m | 1350 lm/m | | |
| 940L1: | 10 W/m | 1450 lm/m | O2: | | Opal 15 W/m | 1850 lm/m | | | |
| 4000°K | 940L2: | 15 W/m | 2050 lm/m | O3: | Opal 22 W/m | 2450 lm/m | | | |
| | 940L3: | 22 W/m | 2700 lm/m | | | | | | |
| | 940L4: | 30 W/m | 4050 lm/m | | | | | | |
| | 940L5: | 42 W/m | 5400 lm/m | | | | | | |
| | Tunable White | 9TWT1: | 10 W/m | 1350 lm/m | | | | | |
| 9TWT2: | | 15 W/m | 1850 lm/m | | | | | | |
| 9TWT3: | | 22 W/m | 2450 lm/m | | | | | | |

We reserve the right to make technical changes without prior notice

LIGHTWAY 5 / PRISMATIC OPAL

PENDANT DIRECT / INDIRECT

Emergency

N No Emergency

Layout

I Shape

Length

60 60 cm

90 90 cm

120 120 cm

150 150 cm

180 180 cm

210 210 cm

240 240 cm

270 270 cm

300 300 cm

Wiring

I Individual

B Beginning

M Middle

E End

We reserve the right to make technical changes without prior notice