


LIGHTWAY 5 / ASYMMETRIC LENS

RECESSED TRIMLESS

The Lightway 5 Asymmetrical Linear Lens is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications.

This Asymmetrical Lens offers powerful lighting and excellent light transmission with high diffusion and homogeneity while blocking the backward throw.

- Superior optical transmission with no visible LED hotspots. Homogeneous lighting over the side wall.
- Asymmetrical illumination for homogeneous adjacent wall lighting
- Great color mixing capability

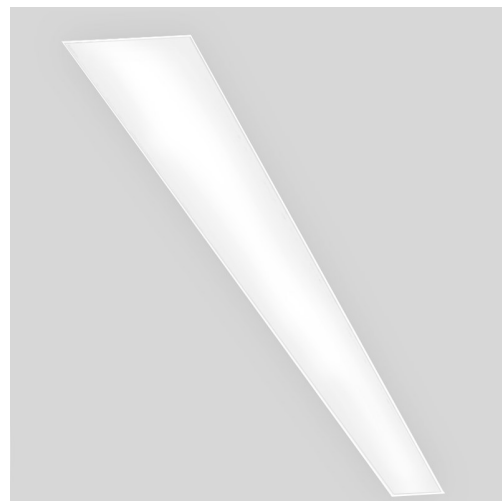

Luminaire

Application:	Ambient
Body Material:	Extruded aluminium
Cutout:	Cutout: length + 3mm / width 59mm / depth 97.5mm


Optics

Optic Type:	PMMA Asymmetrical Linear Lens
Surface Diffuser:	Acrylic Frosted Extruded TIR Lens


Electrical equipment

Mains Voltage:	220-240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

Polar Curve



LOR: 62.31%

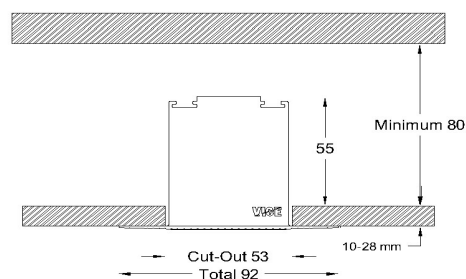

We reserve the right to make technical changes without prior notice

LIGHTWAY 5 / ASYMMETRIC LENS

RECESSED TRIMLESS

Code Index:

L 5	I	R T	A L	X X	-----	-	2 0	--	N	I	---	-
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C		BS			30	I
					927L2	D		BT			60	B
					927L3	E		WS			90	M
					927L4			WT			120	E
					927L5			GS			150	
					930L1						180	
					930L2						210	
					930L3						240	
					930L4						270	
					930L5						300	
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							

- Family**
L5 Lightway 5
- Environment**
I Indoor
- Mounting**
RT Recessed Trimless
- Optic**
AL Asymmetrical Lens
- Beam Angle**
XX N/A

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.

CRI/CCT & Power			
	LED Load	initial Lumen	
2700°K	927L1:	10 W/m	1300 lm/m
	927L2:	14 W/m	1800 lm/m
	927L3:	20 W/m	2550 lm/m
	927L4:	31 W/m	3400 lm/m
3000°K	930L1:	10 W/m	1360 lm/m
	930L2:	14 W/m	1920 lm/m
	930L3:	20 W/m	2660 lm/m
	930L4:	31 W/m	3570 lm/m
4000°K	940L1:	10 W/m	1500 lm/m
	940L2:	14 W/m	2020 lm/m
	940L3:	20 W/m	2800 lm/m
	940L4:	31 W/m	3800 lm/m

- Control**
C Non-dimmable
D DALI Dimmable
E 1-10V Dimmable

- IP**
20 IP20

- Body Finish**
BS Black Smooth
BT Black Fine Textured
WS White Smooth
WT White Textured
GS Gray Smooth

We reserve the right to make technical changes without prior notice



LIGHTWAY 5 / ASYMMETRIC LENS

RECESSED TRIMLESS

Emergency

N No Emergency

Layout

I I Shape

Length

30	30 cm
60	60 cm
90	90 cm
120	120 cm
150	150 cm
180	180 cm
210	210 cm
240	240 cm
270	270 cm
300	300 cm

Wiring

I	Individual
B	Beginning
M	Middle
E	End

We reserve the right to make technical changes without prior notice