

# LIGHTWAY 3 / OPAL RECESSED WITH TRIM

The Lightway 3 PMMA Opal diffuser is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications.

This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots. Perfect Lambertian distribution for a soft light effect
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls



## Luminaire

Application:	Ambient
Body Material:	Extruded aluminium
Cutout:	Cutout: length - 11mm / width 38mm / depth 51mm


## Optics

Surface Diffuser:	Acrylic Opal Diffusing Lens
-------------------	-----------------------------



## Electrical equipment

Mains Voltage:	220-240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

## Polar Curve



LOR: 61.7%

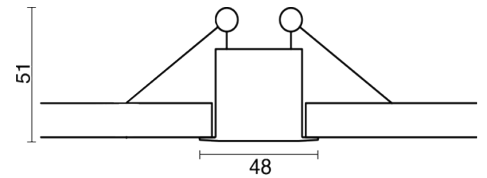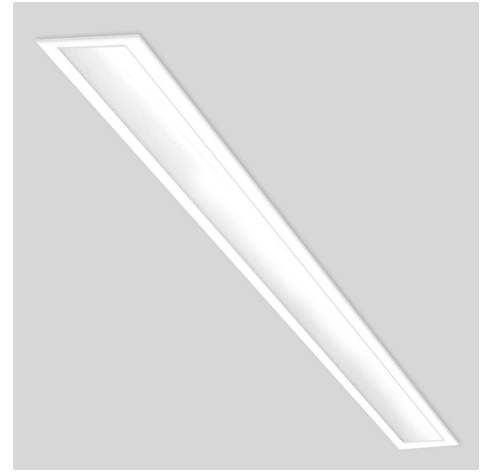

# LIGHTWAY 3 / OPAL RECESSED WITH TRIM

## Code Index:

<u>L 3</u>	<u>I</u>	<u>R W</u>	<u>A O</u>	<u>X X</u>	-----	--	<u>2 0</u>	--	<u>I</u>	----	--
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
					927L1	J		BS		30	I
					927L2	K		BT		60	B
					927L3	L		WS		90	M
					930L1	M		WT		120	E
					930L2			GS		150	
					930L3					180	
					940L1					210	
					940L2					240	
					940L3					270	
					9TWT1					300	
					9TWT2						
					9TWT3						

Family	Environment	Mounting	Optic	Beam Angle
L3 Lightway 3	I Indoor	RW Recessed With Trim	AO Opal Diffuser	XX N/A

CRI/CCT & Power	Control	IP	Body Finish	Layout
<p>LED Load initial Lumen</p> <p>2700°K</p> <p>927L1: 10 W/m 1200 lm/m</p> <p>927L2: 15 W/m 1650 lm/m</p> <p>927L3: 22 W/m 2150 lm/m</p> <hr/> <p>3000°K</p> <p>930L1: 10 W/m 1350 lm/m</p> <p>930L2: 15 W/m 1900 lm/m</p> <p>930L3: 22 W/m 2550 lm/m</p> <hr/> <p>4000°K</p> <p>940L1: 10 W/m 1450 lm/m</p> <p>940L2: 15 W/m 2050 lm/m</p> <p>940L3: 22 W/m 2700 lm/m</p> <hr/> <p>Tunable White</p> <p>9TWT1: 10 W/m 1350 lm/m</p> <p>9TWT2: 15 W/m 1850 lm/m</p> <p>9TWT3: 22 W/m 2450 lm/m</p>	<p>J Remote driver, non-dimmable</p> <p>K Remote driver, DALI</p> <p>L Remote driver, 1-10V</p> <p>M Remote driver, Phase dimming</p>	20 IP20	<p>BS Black Smooth</p> <p>BT Black Textured</p> <p>WS White Smooth</p> <p>WT White Textured</p> <p>GS Gray Smooth</p>	II Shape

Length	Wiring
30 30 cm	I Individual
60 60 cm	B Beginning
90 90 cm	M Middle
120 120 cm	E End
150 150 cm	
180 180 cm	
210 210 cm	
240 240 cm	
270 270 cm	
300 300 cm	

## Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.