

LIGHTWAY 6 / BATWING

PENDANT DIRECT / INDIRECT

The Lightway 6 Direct/Indirect linear system offers numerous combinations of optics and output options. A well-lit ceiling improves the look of the workspace without having to compromise on the efficiency.

The batwing lens provides uniform horizontal surfaces' illumination, suppressing central hotspots and allowing greater on-center fixture spacing.

- Batwing distribution allowing wide area coverage, large spacing between luminaires and suitable for low suspension heights
- Ideal for illuminating vertical surfaces in general lighting applications to reduce contrast



Luminaire

Product Type: Ambient
Body Material: Extruded aluminium

Optics

Optic Type: PMMA Batwing Linear Lens
Surface diffuser: Acrylic Frosted Extruded Refractive Lens


Indirect Optic

Indirect Optic Type: PMMA Batwing Linear Lens, PMMA Opal Lens

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curves




LOR: 75%



Indirect Polar Curves



LOR: 74.8%



LOR: 75%

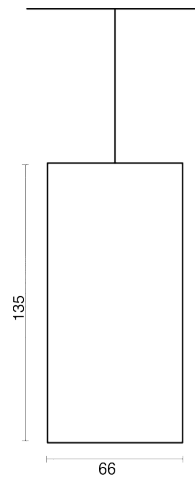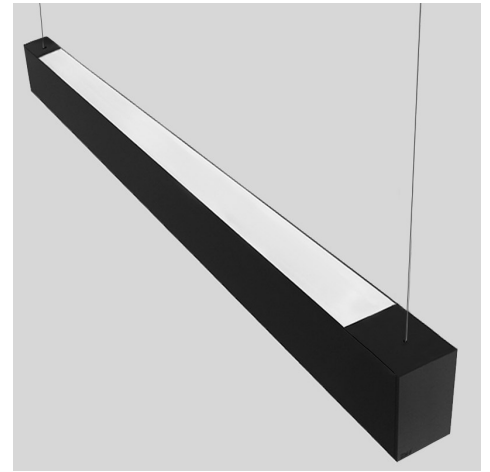

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / BATWING

PENDANT DIRECT / INDIRECT

Code Index:

<u>L 6</u>	<u>I</u>	<u>P B</u>	<u>A L</u>	<u>X X</u>	---	---	---	<u>N</u>	<u>I</u>	---	---		
Family	Environment	Mounting	Application	Beam Angle	CRI/CCT & Power	Dimming	CRI/CCT & Power	Indirect	Body finish	Emergency	Layout	Length	Wiring
					927L1	C	O1		BS			60	I
					927L2	D	O2		BT			90	B
					927L3	E	O3		WS			120	M
					927L4	F	B1		WT			150	E
					927L5		B2		GS			180	
					930L1		B3					210	
					930L2							240	
					930L3							270	
					930L4							300	
					930L5								
					940L1								
					940L2								
					940L3								
					940L4								
					940L5								
					9TWT1								
					9TWT2								
					9TWT3								
					927O1								
					927O2								
					927O3								
					930O1								
					930O2								
					930O3								
					940O1								
					940O2								
					940O3								
					927B1								
					927B2								
					927B3								
					930B1								
					930B2								
					930B3								
					940B1								
					940B2								
					940B3								

Family	Environment	Mounting	Application	Beam Angle
L6 Lightway 6	I Indoor	PB Pendant Direct & Indirect	AL Batwing Lens	XX N/A

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / BATWING

PENDANT DIRECT / INDIRECT

CRI/CCT & Power

		LED Load	initial Lumen
2700°K	927L1:	10 W/m	1200 lm/m
	927L2:	15 W/m	1650 lm/m
	927L3:	22 W/m	2150 lm/m
	927L4:	30 W/m	3250 lm/m
	927L5:	42 W/m	4300 lm/m
3000°K	930L1:	10 W/m	1350 lm/m
	930L2:	15 W/m	1900 lm/m
	930L3:	22 W/m	2550 lm/m
	930L4:	30 W/m	3800 lm/m
	930L5:	42 W/m	5100 lm/m
4000°K	940L1:	10 W/m	1450 lm/m
	940L2:	15 W/m	2050 lm/m
	940L3:	22 W/m	2700 lm/m
	940L4:	30 W/m	4050 lm/m
	940L5:	42 W/m	5400 lm/m
Tunable White	9TWT1:	10 W/m	1350 lm/m
	9TWT2:	15 W/m	1850 lm/m
	9TWT3:	22 W/m	2450 lm/m

Dimming

C Built-in driver, non dimmable
D Built-in driver, DALI
E Built-in driver, 1-10V
F Built-in driver, Phase dim

CRI/CCT & Power Indirect

		LED Load	initial Lumen
2700°K	O1:	Opal 10 W/m	1200 lm/m
	O2:	Opal 15 W/m	1650 lm/m
	O3:	Opal 22 W/m	2150 lm/m
	B1:	Batwing 10 W/m	1200 lm/m
	B2:	Batwing 15 W/m	1650 lm/m
	B3:	Batwing 22 W/m	2150 lm/m
3000°K	O1:	Opal 10 W/m	1350 lm/m
	O2:	Opal 15 W/m	1900 lm/m
	O3:	Opal 22 W/m	2550 lm/m
	B1:	Batwing 10 W/m	1350 lm/m
	B2:	Batwing 15 W/m	1900 lm/m
	B3:	Batwing 22 W/m	2550 lm/m
4000°K	O1:	Opal 10 W/m	1450 lm/m
	O2:	Opal 15 W/m	2050 lm/m
	O3:	Opal 22 W/m	2700 lm/m
	B1:	Batwing 10 W/m	1450 lm/m
	B2:	Batwing 15 W/m	2050 lm/m
	B3:	Batwing 22 W/m	2700 lm/m
Tunable White	O1:	Opal 10 W/m	1350 lm/m
	O2:	Opal 15 W/m	1850 lm/m
	O3:	Opal 22 W/m	2450 lm/m
	B1:	Batwing 10 W/m	1350 lm/m
	B2:	Batwing 15 W/m	1850 lm/m
	B3:	Batwing 22 W/m	2450 lm/m

Body finish

BS Black Smooth
BT Black Textured
WS White Smooth
WT White Textured
GS Gray Smooth

Emergency

N No Emergency

Layout

I I Shape

Length

60 60 cm
90 90 cm
120 120 cm
150 150 cm
180 180 cm
210 210 cm
240 240 cm
270 270 cm
300 300 cm

Wiring

I Individual
B Beginning
M Middle
E End