
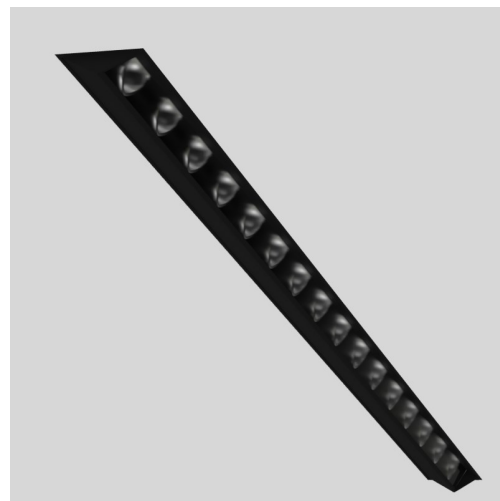


LIGHTWAY 3 / CUT-OFF WASHER RECESSED TRIMLESS

The Lightway 3 Washer marks a breakthrough in wall washing illumination as it offers different outputs with a flawless surface uniformity while blocking the backward and longitudinal light spill. It is glare- and light-pollution free!

The Lightway 3 Washer is designed to be highly configurable and adaptable to a wide variety of commercial and architectural interior lighting applications.

- True wall wash distribution
- Optimized cut-off: blocking the backward and longitudinal light spill (glare-free)
- Homogeneous color mixing within one reflector cell
- Continuous rows or individual fixtures



Luminaire

Application: Washer
Body Material: Extruded aluminium

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type: Asymmetrical Reflector


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve



LOR: 40%

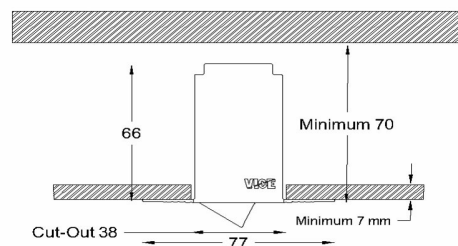

We reserve the right to make technical changes without prior notice

LIGHTWAY 3 / CUT-OFF WASHER

RECESSED TRIMLESS

Code Index:

<u>L 3</u>	<u>I</u>	<u>R T</u>	<u>W O</u>	<u>X X</u>	<u>-----</u>	<u>-</u>	<u>2 0</u>	<u>--</u>	<u>I</u>	<u>---</u>	<u>-</u>	
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring	
					927S1	C		BS		15	I	
					927S2	D		BT		30	B	
					927S3	E		WS		60	M	
					930S1			WT		90	E	
					930S2			GS		120		
					930S3					150		
					940S1					180		
					940S2					210		
					940S3					240		
										270		
										300		

- Family**
L3 Lightway 3
- Environment**
I Indoor
- Mounting**
RT Recessed Trimless
- Optic**
WO Cut-off Washer
- Beam Angle**
XX N/A

CRI/CCT & Power				Control	IP	Body Finish
		LED Load	initial Lumen	C Non-dimmable	20 IP20	BS Black Smooth
2700°K	927S1:	14 W/m	1670 lm/m	D DALI Dimmable		BT Black Fine Textured
	927S2:	20 W/m	2380 lm/m	E 1-10V Dimmable		WS White Smooth
	927S3:	29 W/m	3330 lm/m			WT White Textured
3000°K	930S1:	14 W/m	1760 lm/m			GS Gray Smooth
	930S2:	20 W/m	2520 lm/m			
	930S3:	29 W/m	3520 lm/m			
4000°K	940S1:	14 W/m	1890 lm/m			
	940S2:	20 W/m	2600 lm/m			
	940S3:	29 W/m	3780 lm/m			

- Layout**
I Shape
- Length**
15 15 cm
30 30 cm
60 60 cm
90 90 cm
120 120 cm
150 150 cm
180 180 cm
210 210 cm
240 240 cm
270 270 cm
300 300 cm
- Wiring**
I Individual
B Beginning
M Middle
E End

We reserve the right to make technical changes without prior notice

