
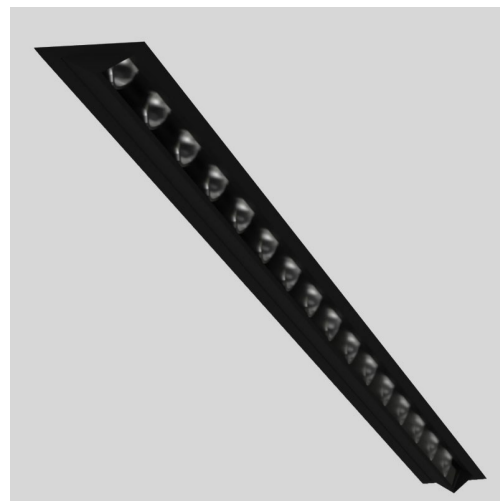


# LIGHTWAY 3 / CUT-OFF WASHER RECESSED WITH TRIM

The Lightway 3 Washer marks a breakthrough in wall washing illumination as it offers different outputs with a flawless surface uniformity while blocking the backward and longitudinal light spill. It is glare- and light-pollution free!

The Lightway 3 Washer is designed to be highly configurable and adaptable to a wide variety of commercial and architectural interior lighting applications.

- True wall wash distribution
- Optimized cut-off: blocking the backward and longitudinal light spill (glare-free)
- Homogeneous color mixing within one reflector cell
- Continuous rows or individual fixtures



## Luminaire


**Application:** Washer  
**Body Material:** Extruded aluminium

## Optics


**Optic Type:** Asymmetrical Reflector

## Electrical equipment

**Mains Voltage:** 220-240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

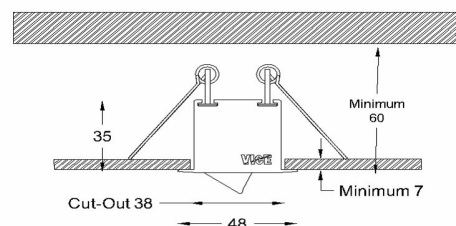

## Polar Curve




LOR: 40%

## Mounting Ratio

We reserve the right to make technical changes without prior notice

# LIGHTWAY 3 / CUT-OFF WASHER RECESSED WITH TRIM



Height/6 to Height/5

Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

*We reserve the right to make technical changes without prior notice*

# LIGHTWAY 3 / CUT-OFF WASHER

## RECESSED WITH TRIM

### Code Index:

<u>L 3</u>	<u>I</u>	<u>R W</u>	<u>W O</u>	<u>X X</u>	<u>-----</u>	<u>-</u>	<u>2 0</u>	<u>--</u>	<u>I</u>	<u>---</u>	<u>-</u>	
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring	
					927S1	C		BS		15	I	
					927S2	D		BT		30	B	
					927S3	E		WS		60	M	
					930S1			WT		90	E	
					930S2			GS		120		
					930S3					150		
					940S1					180		
					940S2					210		
					940S3					240		
										270		
										300		

- Family**  
L3 Lightway 3
- Environment**  
I Indoor
- Mounting**  
RW Recessed With Trim
- Optic**  
WO Cut-off Washer
- Beam Angle**  
XX N/A

CRI/CCT & Power			Control	IP	Body Finish
	LED Load	initial Lumen	C Non-dimmable	20 IP20	BS Black Smooth
2700°K	927S1:	14 W/m	D DALI Dimmable		BT Black Fine Textured
	927S2:	20 W/m	E 1-10V Dimmable		WS White Smooth
	927S3:	29 W/m			WT White Textured
3000°K	930S1:	14 W/m			GS Gray Smooth
	930S2:	20 W/m			
	930S3:	29 W/m			
4000°K	940S1:	14 W/m			
	940S2:	20 W/m			
	940S3:	29 W/m			

- Layout**  
I Shape
- Length**  
15 15 cm  
30 30 cm  
60 60 cm  
90 90 cm  
120 120 cm  
150 150 cm  
180 180 cm  
210 210 cm  
240 240 cm  
270 270 cm  
300 300 cm
- Wiring**  
I Individual  
B Beginning  
M Middle  
E End

We reserve the right to make technical changes without prior notice