


LIGHTWAY 3 / CUT-OFF WASHER RECESSED WITH TRIM

The Lightway 3 Washer marks a breakthrough in wall washing illumination as it offers different outputs with a flawless surface uniformity while blocking the backward and longitudinal light spill. It is glare- and light-pollution free!

The Lightway 3 Washer is designed to be highly configurable and adaptable to a wide variety of commercial and architectural interior lighting applications.

- True wall wash distribution
- Optimized cut-off: blocking the backward and longitudinal light spill (glare-free)
- Homogeneous color mixing within one reflector cell
- Continuous rows or individual fixtures

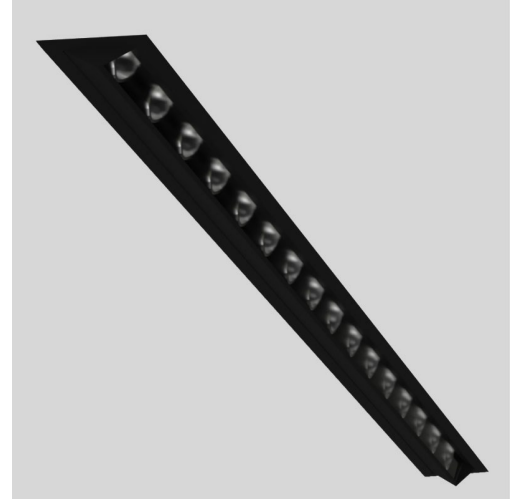

Luminaire

Application: Washer
Body Material: Extruded aluminium


Optics

Optic Type: Asymmetrical Reflector

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve




LOR: 40%

Mounting Ratio

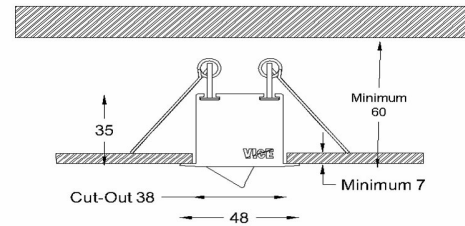

We reserve the right to make technical changes without prior notice

LIGHTWAY 3 / CUT-OFF WASHER RECESSED WITH TRIM



Height/6 to Height/5

Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

LIGHTWAY 3 / CUT-OFF WASHER

RECESSED WITH TRIM

Code Index:

<u>L 3</u>	<u>I</u>	<u>R W</u>	<u>W O</u>	<u>X X</u>	-----	-	<u>2 0</u>	--	<u>I</u>	---	-
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
					927S1	C		BS		15	I
					927S2	D		BT		30	B
					927S3	E		WS		60	M
					930S1			WT		90	E
					930S2			GS		120	
					930S3					150	
					940S1					180	
					940S2					210	
					940S3					240	
										270	
										300	

Family L3 Lightway 3	Environment I Indoor	Mounting RW Recessed With Trim	Optic WO Cut-off Washer	Beam Angle XX N/A
--------------------------------	--------------------------------	--	-----------------------------------	-----------------------------

CRI/CCT & Power

	LED Load	initial Lumen
2700°K	927S1: 4.2 W/ft	501 lm/ft
	927S2: 6 W/ft	714 lm/ft
	927S3: 8.7 W/ft	999 lm/ft
3000°K	930S1: 4.2 W/ft	528 lm/ft
	930S2: 6 W/ft	756 lm/ft
	930S3: 8.7 W/ft	1056 lm/ft
4000°K	940S1: 4.2 W/ft	567 lm/ft
	940S2: 6 W/ft	780 lm/ft
	940S3: 8.7 W/ft	1134 lm/ft

Control

- C Non-dimmable
- D DALI Dimmable
- E 1-10V Dimmable

IP

- 20 IP20

Body Finish

- BS Black Smooth
- BT Black Fine Textured
- WS White Smooth
- WT White Textured
- GS Gray Smooth

Layout

- I I Shape

Length

- 15 15 cm
- 30 30 cm
- 60 60 cm
- 90 90 cm
- 120 120 cm
- 150 150 cm
- 180 180 cm
- 210 210 cm
- 240 240 cm
- 270 270 cm
- 300 300 cm

Wiring

- I Individual
- B Beginning
- M Middle
- E End

We reserve the right to make technical changes without prior notice