



LIGHTWAY 3 / CUT-OFF WASHER

PENDANT DIRECT

The Lightway 3 Washer marks a breakthrough in wall washing illumination as it offers different outputs with a flawless surface uniformity while blocking the backward and longitudinal light spill. It is glare- and light-pollution free!

The Lightway 3 Washer is designed to be highly configurable and adaptable to a wide variety of commercial and architectural interior lighting applications.

- True wall wash distribution
- Optimized cut-off: blocking the backward and longitudinal light spill (glare-free)
- Homogeneous color mixing within one reflector cell
- Continuous rows or individual fixtures

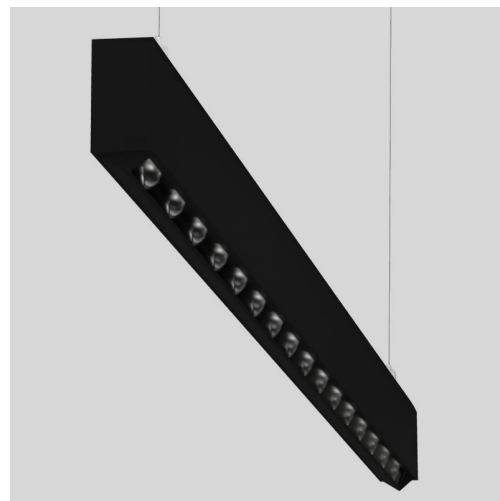

Luminaire

Application: Washer
Body Material: Extruded aluminium


Optics

Optic Type: Asymmetrical Reflector

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve



LOR: 40%


Mounting Ratio

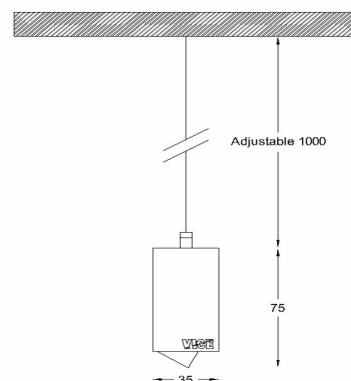

We reserve the right to make technical changes without prior notice

LIGHTWAY 3 / CUT-OFF WASHER

PENDANT DIRECT



Height/6 to Height/5

Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

LIGHTWAY 3 / CUT-OFF WASHER

PENDANT DIRECT

Code Index:

L 3	I	P D	W O	X X	-----	-	2 0	--	I	---	-
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
					927S1	C		BS		60	I
					927S2	D		BT		90	B
					927S3	E		WS		120	M
					930S1			WT		150	E
					930S2			GS		180	
					930S3					210	
					940S1					240	
					940S2					270	
					940S3					300	

Family
L3 Lightway 3

Environment
I Indoor

Mounting
PD Pendant Direct

Optic
WO Cut-off Washer

Beam Angle
XX N/A

CRI/CCT & Power	Control	IP	Body Finish
	C Non-dimmable	20 IP20	BS Black Smooth
	D DALI Dimmable		BT Black Fine Textured
	E 1-10V Dimmable		WS White Smooth
			WT White Textured
			GS Gray Smooth
LED Load initial Lumen			
2700°K 927S1: 14 W/m 1670 lm/m			
927S2: 20 W/m 2380 lm/m			
927S3: 29 W/m 3330 lm/m			
3000°K 930S1: 14 W/m 1760 lm/m			
930S2: 20 W/m 2520 lm/m			
930S3: 29 W/m 3520 lm/m			
4000°K 940S1: 14 W/m 1890 lm/m			
940S2: 20 W/m 2600 lm/m			
940S3: 29 W/m 3780 lm/m			

Layout	Length	Wiring
I I Shape	60 60 cm	I Individual
	90 90 cm	B Beginning
	120 120 cm	M Middle
	150 150 cm	E End
	180 180 cm	
	210 210 cm	
	240 240 cm	
	270 270 cm	
	300 300 cm	

We reserve the right to make technical changes without prior notice

