

ZINC UNO / GRAZER SPIKE MOUNTED

Zinc is designed to contrast with the existing blocky floodlights and spotlights. The Uno showcases a compact high-performance tool that can host a multitude of optics which allows this product to be used in all kinds of Architectural and urban applications.

Zinc line leaves minimal physical impact while blending smoothly within its environment. In spite the compact design Zinc luminaires can host different optics to serve different lighting situations.

This product can be mounted vertically or horizontally and has a tilt adjustment up to 90°, allowing designers to illuminate horizontal, sloped, and vertical surfaces alike.

This system is available with fine mesh shield that secure glare control and conductive visual comfort.

Product Features:

- Homogeneous color mixing within one reflector
- IP 65
- Different optics serving different lighting application:
 - o Wall washer
 - o Wall grazer
 - o Flood light



Luminaire

Application: Grazer
Body Material: Extruded aluminium

Installation


Operating Temperature: -10 to 50°C

Optics

Optic Type: UV stabilized TIR Lens
Surface Diffuser: No Diffuser

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

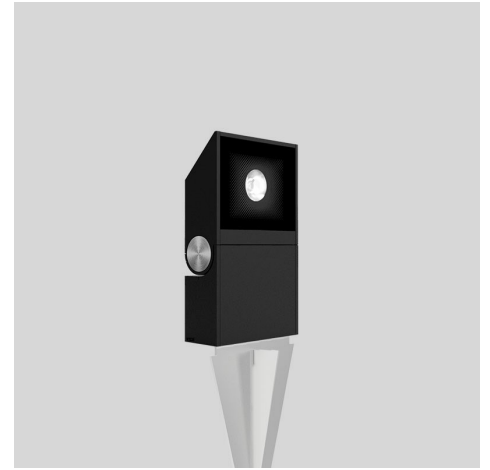

We reserve the right to make technical changes without prior notice

ZINC / GRAZER SPIKE MOUNTED

Mounting Ratio



100 to 150 mm

Setback from the wall is defined by wall texture and height. Consult factory for optimal setback according to your project conditions.

ZINC / GRAZER SPIKE MOUNTED

Code Index:

<u>Z 3</u>	<u>U</u>	<u>O S P</u>	<u>G T</u>	<u>1 3</u>	<u>6 5</u>	<u>0 8</u>					
Family	Product	Mounting	Glare Control Accessory	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Length	Wiring
			X			927C1	C		BS		BI
			L			927C2	K		WS		HI
						930C1	L		GS		
						930C2					
						940C1					
						940C2					

Family	Product	Mounting	Glare Control Accessory	Optic	Beam Angle
Z3 Zinc	U Uno	OSP Spike Mounted	X Without Anti-Glare Louvre L With Anti-Glare Louvre	GT Beam	13 Narrow Beam, 13°

CRI/CCT & Power	Control	IP	Body Finish
LED Load initial Lumen 2700°K 927C1: 4.2 W 330 lm 927C2: 6 W 430 lm 3000°K 930C1: 4.2 W 350 lm 930C2: 6 W 460 lm 4000°K 940C1: 4.2 W 380 lm 940C2: 6 W 490 lm	C Non-dimmable K Remote driver, DALI L Remote driver, 1-10V	65 IP65	BS Black Smooth WS White Smooth GS Gray Smooth

Length	Wiring
08 8 cm	BI Back feeding HI Hidden feeding

We reserve the right to make technical changes without prior notice