

ZINC UNO / FLOODLIGHT SPIKE MOUNTED

Zinc is designed to contrast with the existing blocky floodlights and spotlights. The Uno showcases a compact high-performance tool that can host a multitude of optics which allows this product to be used in all kinds of Architectural and urban applications.

Zinc line leaves minimal physical impact while blending smoothly within its environment. In spite the compact design Zinc luminaires can host different optics to serve different lighting situations.

This product can be mounted vertically or horizontally and has a tilt adjustment up to 90°, allowing designers to illuminate horizontal, sloped, and vertical surfaces alike.

This system is available with fine mesh shield that secure glare control and conductive visual comfort.

Product Features:

- Homogeneous color mixing within one reflector
- IP 65
- IK06
- Different optics serving different lighting application:
 - Wall washer
 - Wall grazer
 - Flood light



General

Impact resistance (IK): IK06

Luminaire

Product Type: Ambient

Body Material: Extruded aluminium

Optics

Optic Type: UV stabilized TIR Lens



Surface diffuser: No Diffuser

Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz

Control Gear Efficacy: > 85%


Polar Curve

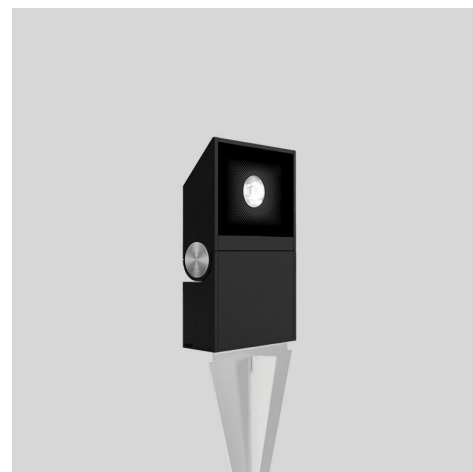


We reserve the right to make technical changes without prior notice

ZINC / FLOODLIGHT

SPIKE MOUNTED



Medium Beam, 30° /
LOR: 82%



Wide Beam, 45° /
LOR: 65.4%

ZINC / FLOODLIGHT SPIKE MOUNTED

Code Index:

<u>Z 3</u>	<u>U</u>	<u>O S P</u>	<u>A T</u>	<u>6 5</u>	<u>O 8</u>						
Family	Product	Mounting	Glare Control Accessory	Application	Beam Angle	CRI/CCT & Power	Control	IP	Body finish	Length	Wiring
			L		E3	927C1	C		BS		BI
			X		30	927C2	K		WS		HI
					45	930C1	L		GS		
						930C2					
						940C1					
						940C2					

Family	Product	Mounting	Glare Control Accessory	Application	Beam Angle
Z3 Zinc	U Uno	OSP Spike Mounted		AT Floodlight, Beam	E3 Elliptical beam 10° x 52° 30 Medium Beam, 30° 45 Wide Beam, 45°

CRI/CCT & Power	Control	IP	Body finish
<p>LED Load initial Lumen</p> <p>2700°K 927C1: 4.2 W 400 lm 927C2: 6 W 500 lm</p> <p>3000°K 930C1: 4.2 W 400 lm 930C2: 6 W 550 lm</p> <p>4000°K 940C1: 4.2 W 450 lm 940C2: 6 W 600 lm</p>	<p>C Built-in driver, non-dimmable</p> <p>K Remote driver, DALI</p> <p>L Remote driver, 1-10V</p>	65 IP65	<p>BS Black Smooth</p> <p>WS White Smooth</p> <p>GS Gray Smooth</p>

Length	Wiring
O8 8 cm	<p>BI Back feeding</p> <p>HI Hidden feeding</p>

We reserve the right to make technical changes without prior notice