


STARDROP / DARKWAY

SURFACE MOUNTED

The stardrop is quite adaptable to well integrate into the space ratio and requirements. The stardrop device can be either ceiling mounted or pendant. The number of spots can be modified in every unit. This product offers high visual comfort, ideal for residential and commercial spaces.

- Clean square light distribution from 25mm round aperture reflectors. The optimal beam angle over field angle ratio offers a highly-uniform horizontal surface
- Flexibility of mounting height with 3 beam angles
- Homogeneous color mixing within one reflector

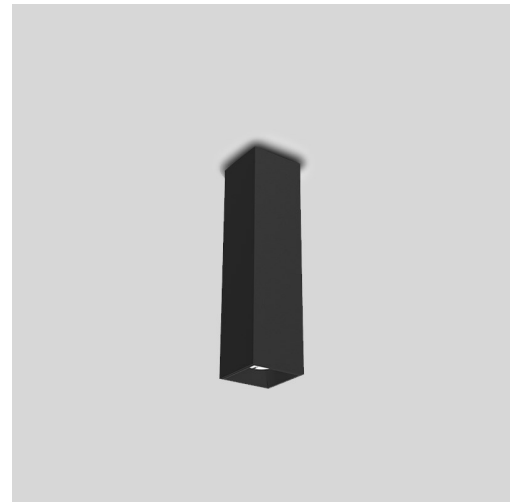

Luminaire


Application: Ambient
Body Material: Extruded aluminium

Optics


Optic Type: Special Reflector With Microfaceted Surface
Glare Control Device: Cinco Cell Baffles
Surface Diffuser: No Diffuser

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

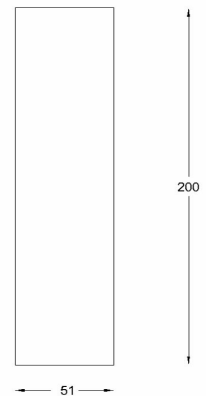


Polar Curves



Narrow Beam 36° LOR:
70.3%



Medium Beam 50° LOR:
90.4%



Wide Beam 60° LOR: 88.5%

STARDROP / DARKWAY

SURFACE MOUNTED

Code Index:

<u>S</u>	<u>D</u>	<u>I</u>	<u>S</u>	<u>M</u>	<u>S</u>	<u>I</u>	<u>D</u>	<u>—</u>	<u>—</u>	<u>—</u>	<u>—</u>	<u>—</u>	<u>—</u>	<u>—</u>	<u>2</u>	<u>0</u>	<u>—</u>	<u>I</u>	<u>2</u>	<u>0</u>
Family	Environment	Mounting	Shape	Number of LED	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length								
						SN	927E1	J		BS										
						SM	927E2	K		BT										
						SW	927E3	L		WS										
							930E1			WT										
							930E2			GS										
							930E3													
							940E1													
							940E2													
							940E3													

Family	Environment	Mounting	Shape	Number of LED
SD Stardrop	I Indoor	SM Surface Mounted	S Square	11 LED

Optic	Light Distribution	CRI/CCT & Power	Control
D Darkway	SN Narrow Beam, 36°	LED Load initial Lumen	J Non-dimmable
	SM Medium Beam, 50°	927E1: 1 W 100 lm	K DALI Dimmable
	SW Wide Beam, 60°	927E2: 1.5 W 140 lm	L 1-10V Dimmable
		927E3: 2 W 180 lm	
		930E1: 1 W 110 lm	
		930E2: 1.5 W 150 lm	
		930E3: 2 W 190 lm	
		940E1: 1 W 110 lm	
		940E2: 1.5 W 150 lm	
		940E3: 2 W 200 lm	

IP	Body Finish	Layout	Length
20 IP20	BS Black Smooth	I Shape	20 20 cm
	BT Black Fine Textured		
	WS White Smooth		
	WT White Textured		
	GS Gray Smooth		

We reserve the right to make technical changes without prior notice

