


PIXELIER / CIRCULAR PENDANT DIRECT

The pixelier modern concept allows arranging the luminaire in any desired shape. A highly configurable system in terms of shape and output performance. This central lighting unit has an aesthetic value, besides its high definition illumination.

- Flexibility of mounting height with 3 beam angles
- Homogeneous color mixing within one reflector

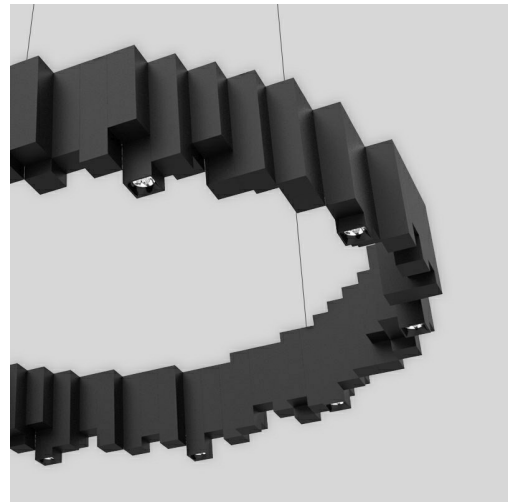

Luminaire



Application: Ambient
Body Material: Aluminium

Optics


Optic Type: Polycarbonate Reflector

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

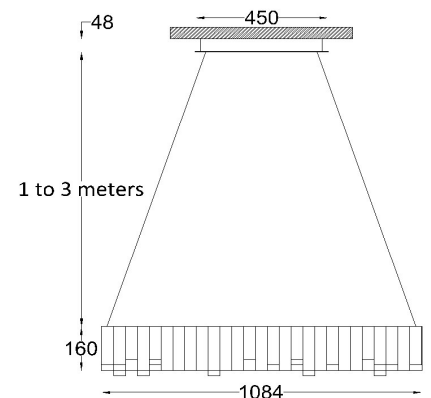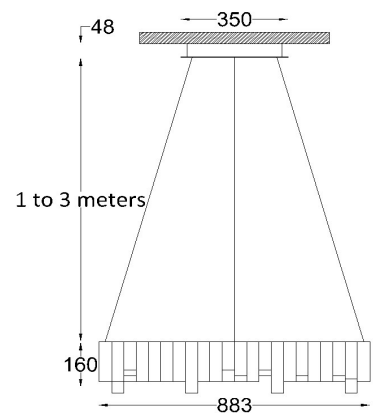


Polar Curves



Beam Angle 24° LOR: 68%



Beam Angle 38° LOR: 68%



Beam Angle 50° LOR: 68%

We reserve the right to make technical changes

PIXELIER / CIRCULAR

PENDANT DIRECT

Code Index:

<u>P</u> <u>X</u>	<u>I</u>	<u>P</u> <u>D</u>	<u>S</u>	<u> </u>	<u> </u>	<u> </u> <u> </u> <u> </u> <u> </u>	<u>D</u>	<u>2</u> <u>O</u>	<u> </u>	<u>C</u>	<u> </u> <u> </u>
Family	Environment	Mounting	Shape	Number of LED	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Optic	Diameter
				10	24	927E1			BS		90
					38	927E2			BT		110
					50	930E1			WS		
						930E2			WT		
						940E1			GS		
						940E2					

- Family**
PX Pixelier
- Environment**
I Indoor
- Mounting**
PD Pendant Direct
- Shape**
S Square
- Number of LED**
10 10 LED
16 LED

- Beam Angle**
24 Narrow Beam 24°
38 Medium Beam 38°
50 Wide Beam 50°
- CRI/CCT & Power**

		LED Load	initial Lumen
2700°K	927E2:	56 W	4900 lm
	927E1:	30 W	2620 lm
3000°K	930E2:	56 W	5050 lm
	930E1:	30 W	2700 lm
4000°K	940E2:	56 W	5450 lm
	940E1:	30 W	2910 lm
- Control**
D Dali Dimmable / Push to Dim
- IP**
20 IP20

- Body Finish**
BS Black Smooth
BT Black Fine Textured
WS White Smooth
WT White Textured
GS Gray Smooth
- Optic**
C Circular
- Diameter**
90 90 cm
110 110 cm

We reserve the right to make technical changes without prior notice