


PIXELIER / WAVE

SURFACE MOUNTED

The pixelier modern concept allows arranging the luminaire in any desired shape. A highly configurable system in terms of shape and output performance. This central lighting unit has an aesthetic value, besides its high definition illumination.

- Flexibility of mounting height with 3 beam angles
- Homogeneous color mixing within one reflector

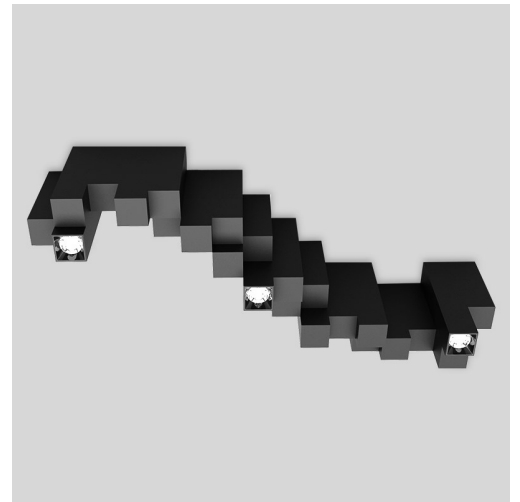


Luminaire

Application: Ambient
Body Material: Extruded aluminium

Optics

Optic Type: Special Reflector With Microfaceted Surface
Glare Control Device: Cinco Cell Baffles
Surface Diffuser: No Diffuser



Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

We reserve the right to make technical changes without prior notice

PIXELIER / WAVE

SURFACE MOUNTED

Code Index:

<u>P</u> <u>X</u>	<u>I</u>	<u>S</u> <u>M</u>	<u>S</u>	<u>3</u>	<u>D</u>	<u>---</u>	<u>-----</u>	<u>-</u>	<u>2</u> <u>0</u>	<u>---</u>	<u>W</u>	<u>6</u> <u>4</u>
Family	Environment	Mounting	Shape	Number of LED	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length
						SN	927E1	J		BS		
						SM	927E2	K		BT		
						SW	927E3	L		WS		
							930E1			WT		
							930E2			GS		
							930E3					
							940E1					
							940E2					
							940E3					

Family
PX Pixelier

Environment
I Indoor

Mounting
SM Surface Mounted

Shape
S Square

Number of LED
3 3 LED

Optic
D Darkway

Light Distribution
SN Narrow Beam, 36°
SM Medium Beam, 50°
SW Wide Beam, 60°

CRI/CCT & Power

		LED Load	initial Lumen
2700°K	927E1:	9 W	790 lm
	927E2:	4.5 W	
	927E3:	6 W	
3000°K	930E1:	9 W	810 lm
	930E2:	4.5 W	
	930E3:	6 W	
4000°K	940E1:	9 W	880 lm
	940E2:	4.5 W	
	940E3:	6 W	

Control
J Non-dimmable
K DALI Dimmable
L 1-10V Dimmable

IP
20 IP20

Body Finish
BS Black Smooth
BT Black Fine Textured
WS White Smooth
WT White Textured
GS Gray Smooth

Layout
W Wave Shape

Length
64 64 cm

We reserve the right to make technical changes without prior notice

