


LIGHTWAY 6 / GRAZING BAFFLES

WALL MOUNTED DIRECT

The Lightway 6 Grazing Baffles are optically engineered to perform best-in-class grazing capabilities. The luminaire offers a tool to emphasize rough-textured surfaces up to 5m high.

The specially-designed aluminum optics are totally glare free from both longitudinal and transversal sides of the profile, achieving a powerful effect ideal for surfaces of great height for indoor applications.

- Best-in-class vertical surface grazing, Scallop-free lighting from zero start point of vertical surfaces
- Glare-free, transversal shielding angle (76°), longitudinal shielding angle (45°)
- 5 to 10cm from edge of fixture to surface of the wall depending on its height and surface relief. Use of continuous fixtures to within 10cm of side walls



Luminaire

Application: Grazer

Body Material: Extruded aluminium

Optics

Optic Type: UV stabilized TIR Lens


Glare Control Device: Aluminium Anti-Glare Baffles and Linear Glare Shield

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz

Control Gear Efficacy: > 85%


Polar Curves



Beam angle 15° LOR: 42.7%

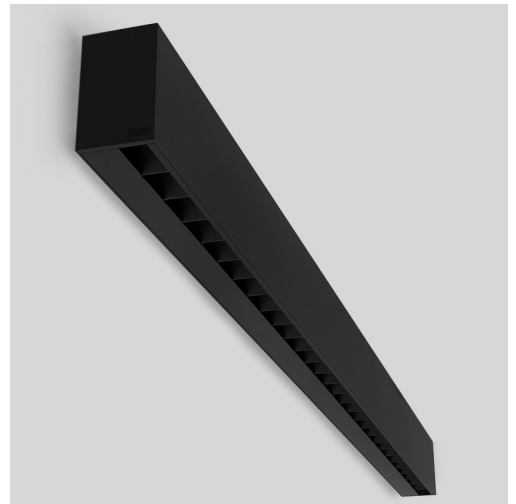

reddot award 2017
winner

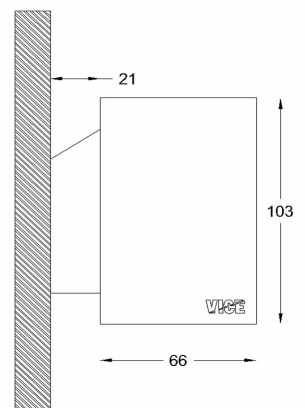

We reserve the right to make technical changes without prior notice

