


LIGHTWAY 3 / OPAL

SURFACE MOUNTED

The Lightway 3 PMMA Opal diffuser is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications.

This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots. Perfect Lambertian distribution for a soft light effect
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls

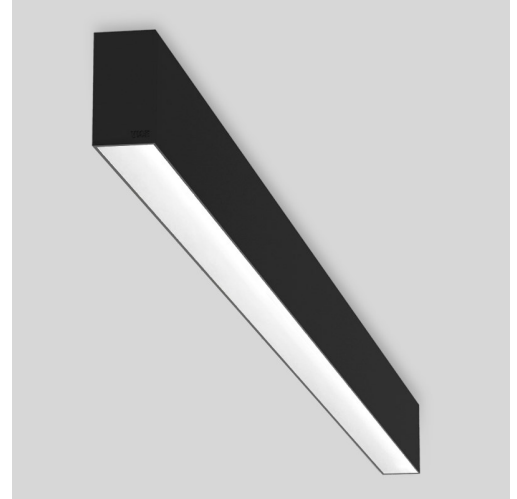

Luminaire

Application: Ambient
Body Material: Extruded aluminium


Optics

Surface Diffuser: Acrylic Opal Diffusing Lens


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve



LOR: 61.7%

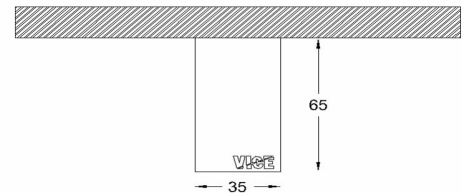

We reserve the right to make technical changes without prior notice

LIGHTWAY 3 / OPAL

SURFACE MOUNTED

Code Index:

<u>L 3</u>	<u>I</u>	<u>S M</u>	<u>A O</u>	<u>X X</u>	<u>---</u>	<u>---</u>	<u>2 0</u>	<u>---</u>	<u>I</u>	<u>---</u>	<u>---</u>
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
					927L1	C		BS		60	I
					927L2	D		BT		90	B
					927L3	E		WS		120	M
					930L1			WT		150	E
					930L2			GS		180	
					930L3					210	
					940L1					240	
					940L2					270	
					940L3					300	
					9TWT1						
					9TWT2						
					9TWT3						

Family
L3 Lightway 3

Environment
I Indoor

Mounting
SM Surface Mounted

Optic
AO Opal Diffuser

Beam Angle
XX N/A

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.

CRI/CCT & Power

		LED Load	initial Lumen
2700°K	927L1:	10 W/m	1500 lm/m
	927L2:	14 W/m	2100 lm/m
	927L3:	20 W/m	2900 lm/m
3000°K	930L1:	10 W/m	1600 lm/m
	930L2:	14 W/m	2170 lm/m
	930L3:	20 W/m	3000 lm/m
4000°K	940L1:	10 W/m	1650 lm/m
	940L2:	14 W/m	2300 lm/m
	940L3:	20 W/m	3150 lm/m
Tunable White	9TWT1:	10 W/m	1500 lm/m
	9TWT2:	15 W/m	
	9TWT3:	22 W/m	
80-2700	827L1:	10 W/m	1770 lm/m
	827L2:	14 W/m	2500 lm/m
	827L3:	20 W/m	3450 lm/m
	827L4:	31 W/m	5000 lm/m
80-3000	830L1:	10 W/m	1800 lm/m
	830L2:	14 W/m	2600 lm/m
	830L3:	20 W/m	3500 lm/m
	830L4:	31 W/m	5100 lm/m
80-4000	840L1:	10 W/m	1900 lm/m
	840L2:	14 W/m	2700 lm/m
	840L3:	20 W/m	3700 lm/m
	840L4:	31 W/m	5300 lm/m

Control

C Non-dimmable
D DALI Dimmable
E 1-10V Dimmable

IP

20 IP20

Body Finish

BS Black Smooth
BT Black Fine Textured
WS White Smooth
WT White Textured
GS Gray Smooth

Layout

I I Shape

Length

60 60 cm
90 90 cm
120 120 cm
150 150 cm
180 180 cm
210 210 cm
240 240 cm
270 270 cm
300 300 cm

Wiring

I Individual
B Beginning
M Middle
E End

We reserve the right to make technical changes without prior notice