

LIGHTWAY 3 / DOWNLIGHT

SURFACE MOUNTED

The downlight dash is a modern concept of glare-free downlight with square distribution. This elegant luminaire is designed to host multiple reflectors of different beam angles, generating a perfect and flawless square distribution, ideal for diverse general lighting applications.

- Clean square light distribution from 25mm round aperture reflectors. The optimal beam angle over field angle ratio offers a highly-uniform horizontal surface
- Flexibility of mounting height with 3 beam angles
- Homogeneous color mixing within one reflector
- Glare-free illumination ($UGR < 0$) for narrow beam, ($UGR < 14$) for medium beam and ($UGR < 19$) for wide beam at Flux ≤ 650 lm/module.



Luminaire


Application: Ambient
Body Material: Extruded aluminium

Optics


Optic Type: Special Reflector With Microfaceted Surface
Glare Control Device: Cinco Cell Baffles

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: $> 85\%$

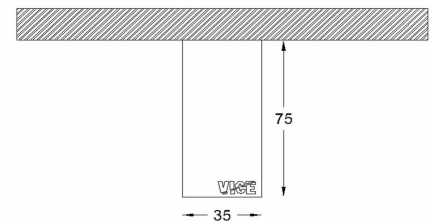


Polar Curves



Narrow Beam 36° LOR:
70.3%



Medium Beam 50° LOR:
90.4%



Wide Beam 60° LOR: 88.5%

LIGHTWAY 3 / DOWNLIGHT

SURFACE MOUNTED

Code Index:

L 3	I	S M	D L	—	—	—	—	2 0	—	I	—
Family	Environment	Mounting	Optic	Number of modules	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length
				2	SN	927F1	C		BS		30
				3	SM	927F2	D		BT		45
					SW	927F3			WS		
						930F1			WT		
						930F2			GS		
						930F3					
						940F1					
						940F2					
						940F3					

Family	Environment	Mounting	Optic	Number of modules
L3 Lightway 3	I Indoor	SM Surface Mounted	DL Downlight Dash	2 2 Modules 3 3 Modules

Light Distribution	CRI/CCT & Power	Control	IP
SN Narrow Beam, 36°	LED Load initial Lumen	C Non-dimmable	20 IP20
SM Medium Beam, 50°		D DALI Dimmable	
SW Wide Beam, 60°			
	2700°K		
	927F1: 10 W 1000 lm		
	927F2: 15 W 1400 lm		
	927F3: 20 W 1800 lm		
	927F1: 15 W 1500 lm		
	927F2: 22.5 W 2100 lm		
	927F3: 30 W 2700 lm		
	3000°K		
	930F1: 10 W 1100 lm		
	930F2: 15 W 1500 lm		
	930F3: 20 W 1900 lm		
	930F1: 15 W 1650 lm		
	930F2: 22.5 W 2250 lm		
	930F3: 30 W 2850 lm		
	4000°K		
	940F1: 10 W 1100 lm		
	940F2: 15 W 1500 lm		
	940F3: 20 W 2000 lm		
	940F1: 15 W 1650 lm		
	940F2: 22.5 W 2250 lm		
	940F3: 30 W 3000 lm		
		Body Finish	Layout
		BS Black Smooth	I I Shape
		BT Black Fine Textured	
		WS White Smooth	
		WT White Textured	
		GS Gray Smooth	

Length
30 30 cm
45 45 cm

We reserve the right to make technical changes without prior notice