


ZINC UNO / WASHER SPIKE MOUNTED

Zinc is designed to contrast with the existing blocky floodlights and spotlights. The Uno showcases a compact high-performance tool that can host a multitude of optics which allows this product to be used in all kinds of Architectural and urban applications.

Zinc line leaves minimal physical impact while blending smoothly within its environment. In spite the compact design Zinc luminaires can host different optics to serve different lighting situations.

This product can be mounted vertically or horizontally and has a tilt adjustment up to 90°, allowing designers to illuminate horizontal, sloped, and vertical surfaces alike.

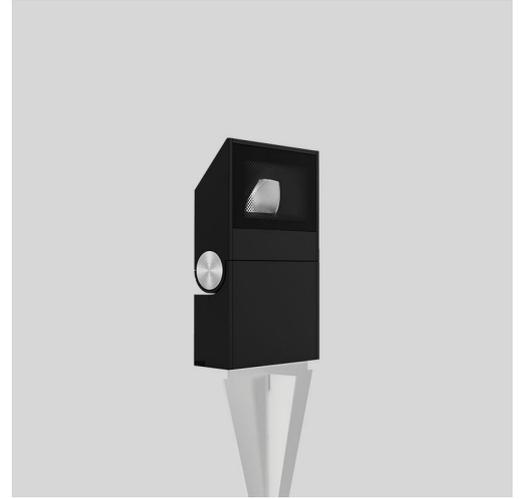

Product Features:

- Homogeneous color mixing within one reflector
- IP 65
- Different optics serving different lighting application:
 - Wall washer
 - Wall grazer
 - Flood light



Luminaire

Application:	Washer
Body Material:	Extruded aluminium
Glass Cover:	Black Serigraphy

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type: Metallized Faceted Reflectors

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve

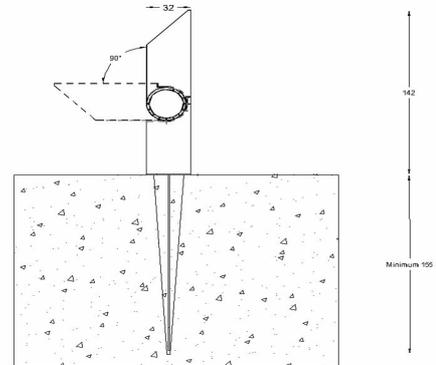

We reserve the right to make technical changes without prior notice

ZINC / WASHER SPIKE MOUNTED



LOR: 73%

Mounting Ratio



Height/6 to Height/5

Setback from the wall is defined by wall texture and height. Consult our sales representative for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

ZINC / WASHER SPIKE MOUNTED

Code Index:

<u>Z 3</u>	<u>U</u>	<u>O S P</u>	<u>W O</u>	<u>X X</u>	---	---	<u>6 5</u>	---	<u>O 8</u>	---
Family	Product	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Length	Wiring
					927M1	C		BS		BI
					927M2	K		WS		HI
					930M1	L		GS		
					930M2					
					940M1					
					940M2					

Family

Z3
Zinc

Product

U Uno

Mounting

OSP Spike Mounted

Optic

WO Cut-off Washer

Beam Angle

XX N/A

CRI/CCT & Power

		LED Load	initial Lumen
2700°K	927M1:	4.2 W	350 lm
	927M2:	6 W	460 lm
3000°K	930M1:	4.2 W	370 lm
	930M2:	6 W	500 lm
4000°K	940M1:	4.2 W	400 lm
	940M2:	6 W	530 lm

Control

C Non-dimmable
K Remote driver, DALI
L Remote driver, 1-10V

IP

65 IP65

Body Finish

BS Black Smooth
WS White Smooth
GS Gray Smooth

Length

O8 8 cm

Wiring

BI Back feeding
HI Hidden feeding

We reserve the right to make technical changes without prior notice