


LIGHTWAY 6 – OUTDOOR / CUT-OFF WASHER WALL RECESSED

The Lightway 6 wall recessed Cut-Off washer is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, This IP 67 element provides homogenous distribution of light over vertical surfaces while achieving a very high output, making it ideal for stairs and hallways lighting applications.

- True wall wash distribution. Vertical light uniformity (1:4)
- Optimized cut-off: blocking the backward and longitudinal light spill (glarefree)
- Homogeneous color mixing within one reflector cell
- A minimum of 3.9 inches from side walls to prevent unwanted light spillage

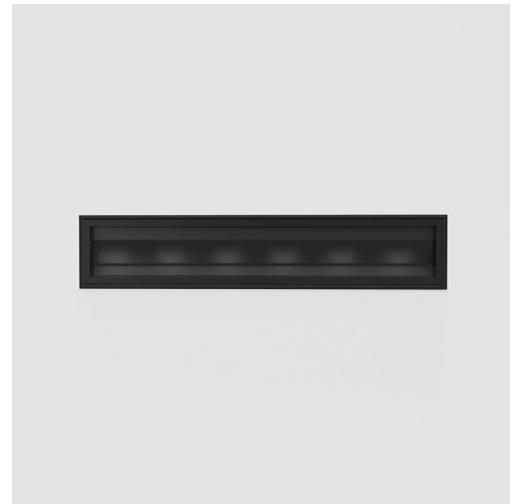

Luminaire

Application: Washer
Body Material: Extruded aluminium
Cutout: Cutout: length + 0.1 inches / width 5.3 inches / depth 4.1 inches

Installation

Operating Temperature: -10 to 50°C


Optics

Optic Type: Metallized Faceted Reflectors
Glare Control Device: Linear Glare Shield
Surface Diffuser: Acrylic Micro Lenticular Structure Diffuser


Electrical equipment

Mains Voltage: 120-277VAC 60Hz
Control Gear Efficacy: > 85%

Polar Curves

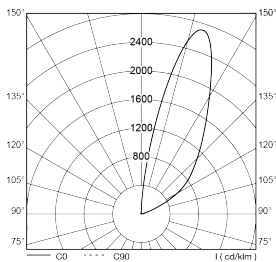

Cut-Off Washer LOR: 58.9%

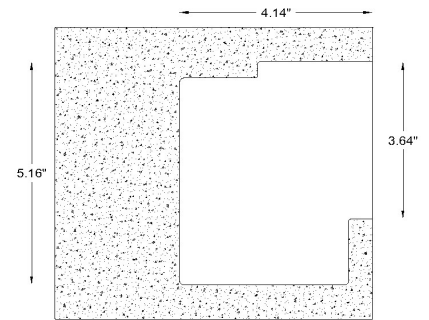

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 – OUTDOOR / CUT-OFF WASHER

WALL RECESSED

Code Index:

<u>L 6</u>	<u>O</u>	<u>W R</u>	<u>W O</u>	<u>X X</u>	-----	<u>P</u>	<u>6 7</u>	<u>B T</u>	<u>N</u>	<u>I</u>	---
Family	Environment	Mounting	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length
					935M1						04
					935M2						08
					935M3						12
					927M1						
					927M2						
					927M3						
					930M1						
					930M2						
					930M3						
					940M1						
					940M2						
					940M3						

Family
L6 Lightway 6

Environment
O Outdoor

Mounting
WR Wall Recessed

Optic
WO Cut-off Washer

Light Distribution
XX N/A

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 – OUTDOOR / CUT-OFF WASHER

WALL RECESSED

CRI/CCT & Power

LED Load initial Lumen

2700°K	927M1:	2 W/m	120 lm
	927M2:	3 W/m	170 lm
	927M3:	4.4 W/m	235 lm
	927M1:	4 W	240 lm
	927M2:	6 W	340 lm
	927M3:	8.8 W/m	470 lm
	927M1:	8 W/m	360 lm
	927M2:	12 W/m	510 lm
	927M3:	16.8 W/m	705 lm

3000°K	930M1:	2 W/m	130 lm
	930M2:	3 W/m	180 lm
	930M3:	4.4 W/m	250 lm
	930M1:	4 W	260 lm
	930M2:	6 W	360 lm
	930M3:	8.8 W/m	500 lm
	930M1:	8 W/m	390 lm
	930M2:	12 W/m	540 lm
	930M3:	16.8 W/m	750 lm

3500°K	935M1:	2 W/m	
	935M2:	3 W/m	
	935M3:	4.4 W/m	
	935M1:	4 W	
	935M2:	6 W	
	935M3:	8.8 W/m	
	935M1:	8 W/m	
	935M2:	12 W/m	
	935M3:	16.8 W/m	

4000°K	940M1:	2 W/m	130 lm
	940M2:	3 W/m	180 lm
	940M3:	4.4 W/m	255 lm
	940M1:	4 W	260 lm
	940M2:	6 W	360 lm
	940M3:	8.8 W/m	510 lm
	940M1:	8 W/m	390 lm
	940M2:	12 W/m	540 lm
	940M3:	16.8 W/m	765 lm

Control

P Non-dimmable

IP

67 IP67

Body Finish

BT Black Fine Textured

Emergency

N No Emergency

Layout

I I Shape

Length

04 4 in

08 8 in

12 12 in