

# STARDROP / DARKWAY

## SURFACE MOUNTED

The stardrop is quite adaptable to well integrate into the space ratio and requirements. The stardrop device can be either ceiling mounted or pendant. The number of spots can be modified in every unit. This product offers high visual comfort, ideal for residential and commercial spaces.

- Clean square light distribution from 25mm round aperture reflectors.
- The optimal beam angle over field angle ratio offers a highly-uniform horizontal surface
- Flexibility of mounting height with 3 beam angles
- Homogeneous color mixing within one reflector



### Luminaire


**Application:** Ambient  
**Body Material:** Extruded aluminium

### Optics


**Optic Type:** Special reflector of complex microfaceted surface  
**Glare Control Device:** Cinco Cell Baffles  
**Surface Diffuser:** No Diffuser

### Electrical equipment

**Mains Voltage:** 220–240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%



### Polar Curve

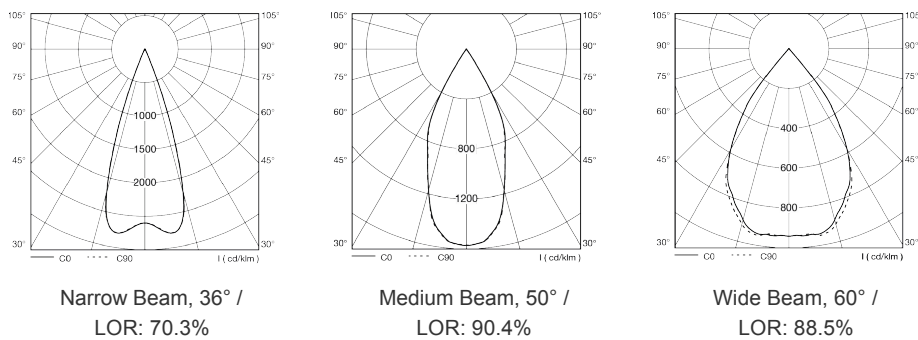

We reserve the right to make technical changes without prior notice

# STARDROP / DARKWAY

## SURFACE MOUNTED

### Code Index:

<u>S</u> <u>D</u>	<u>I</u>	<u>S</u> <u>M</u>	<u>R</u>	<u>1</u>	<u>D</u>	---	-----	--	<u>2</u> <u>0</u>	---	<u>I</u>	<u>2</u> <u>0</u>
Family	Environment	Mounting	Shape	Number of LED	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length
						SN	927E1	J		BS		
						SM	927E2	K		BT		
						SW	927E3	L		WS		
							930E1			WT		
							930E2			GS		
							930E3					
							940E1					
							940E2					
							940E3					
							9TWH1					
							9TWH2					
							9TWH3					

Family	Environment	Mounting	Shape	Number of LED	Optic
SD Stardrop	I Indoor	SM Surface Mounted	R Round	11 LED	D Darkway

Beam Angle	CRI/CCT & Power	Control	IP
SN Narrow Beam, 36°	LED Load initial Lumen	J Remote driver, non-dimmable	20 IP20
SM Medium Beam, 50°	2700°K	K Remote driver, DALI	
SW Wide Beam, 60°	927E1: 1 W 100 lm	L Remote driver, 1-10V	
	927E2: 1.5 W 140 lm		
	927E3: 2 W 180 lm		
	3000°K		
	930E1: 1 W 110 lm		
	930E2: 1.5 W 150 lm		
	930E3: 2 W 190 lm		
	4000°K		
	940E1: 1 W 110 lm		
	940E2: 1.5 W 150 lm		
	940E3: 2 W 200 lm		
	Tunable White		
	9TWH1: 1 W 105 lm		
	9TWH2: 1.5 W 145 lm		
	9TWH3: 2 W 190 lm		

Body Finish	Layout	Length
BS Black Smooth	I I Shape	20 20 cm
BT Black Textured		
WS White Smooth		
WT White Textured		
GS Gray Smooth		

We reserve the right to make technical changes without prior notice