


PIXELIER / DARKWAY SURFACE MOUNTED

The pixelier modern concept allows arranging the luminaire in any desired shape. A highly configurable system in terms of shape and output performance. This central lighting unit has an aesthetic value, besides its high definition illumination.

- Flexibility of mounting height with 3 beam angles
- Homogeneous color mixing within one reflector

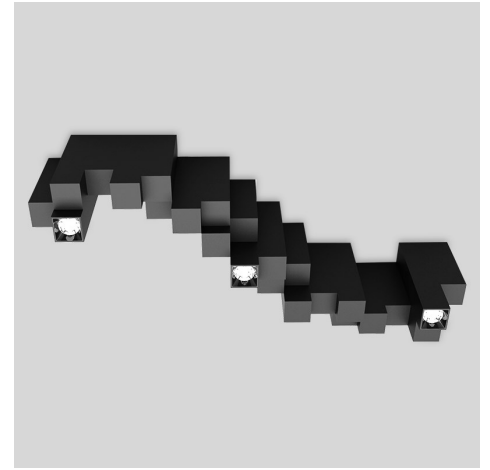

Luminaire


Application: Ambient
Body Material: Extruded aluminium

Optics


Optic Type: Special reflector of complex microfaceted surface
Glare Control Device: Cinco Cell Baffles
Surface Diffuser: No Diffuser

Electrical equipment


Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%




Polar Curve



Narrow Beam, 36° /
LOR: 70.3%



Medium Beam, 50° /
LOR: 90.4%



Wide Beam, 60° /
LOR: 88.5%

We reserve the right to make technical changes without prior notice

PIXELIER / DARKWAY

SURFACE MOUNTED

Code Index:

<u>P</u> <u>X</u>	<u>I</u>	<u>S</u> <u>M</u>	<u>S</u>	<u>3</u>	<u>D</u>	<u>---</u>	<u>-----</u>	<u>--</u>	<u>2</u> <u>0</u>	<u>---</u>	<u>W</u>	<u>6</u> <u>4</u>
Family	Environment	Mounting	Shape	Number of LED	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length
						SN	927E1	J		BS		
						SM	927E2	K		BT		
						SW	927E3	L		WS		
							930E1			WT		
							930E2			GS		
							930E3					
							940E1					
							940E2					
							940E3					
							9TWH1					
							9TWH2					
							9TWH3					

Family	Environment	Mounting	Shape	Number of LED	Optic
PX Pixelier	I Indoor	SM Surface Mounted	S Square	3 3 LED	D Darkway

Beam Angle	CRI/CCT & Power	Control	IP
SN Narrow Beam, 36°	LED Load initial Lumen	J Remote driver, non-dimmable	20 IP20
SM Medium Beam, 50°	2700°K	K Remote driver, DALI	
SW Wide Beam, 60°	927E1: 3 W 300 lm	L Remote driver, 1-10V	
	927E2: 4.5 W 420 lm		
	927E3: 6 W 540 lm		
	3000°K		
	930E1: 3 W 330 lm		
	930E2: 4.5 W 450 lm		
	930E3: 6 W 570 lm		
	4000°K		
	940E1: 3 W 330 lm		
	940E2: 4.5 W 450 lm		
	940E3: 6 W 600 lm		
	Tunable White		
	9TWH1: 3 W 315 lm		
	9TWH2: 4.5 W 435 lm		
	9TWH3: 6 W 570 lm		

Body Finish	Layout	Length
BS Black Smooth	W Wave Shape	64 64 cm
BT Black Textured		
WS White Smooth		
WT White Textured		
GS Gray Smooth		

We reserve the right to make technical changes without prior notice