

LIGHTWAY 6 / ELLIPTICAL NARROW LENS

RECESSED TRIMLESS

The Lightway 6 - with its powerful and efficient Elliptical Narrow Lens - provides homogeneous vertical surface grazing and works perfectly on high vertical surfaces for both indoor and outdoor applications.

- Wide lateral beam spread for high ceiling applications, over 4m height. Emphasizes contrast effects on textured surfaces
- 5 to 10cm from the edge of fixture to the surface of the wall
- Install to within 45cm of side walls to minimize spill



Luminaire

Application: Grazer
Body Material: Extruded aluminium
Cutout: Cutout: length + 3mm / width 61mm / depth 120.5mm


Optics

Optic Type: PMMA Linear Narrow Lens
Surface Diffuser: Acrylic Frosted Extruded TIR Lens


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve




LOR: 82.3%

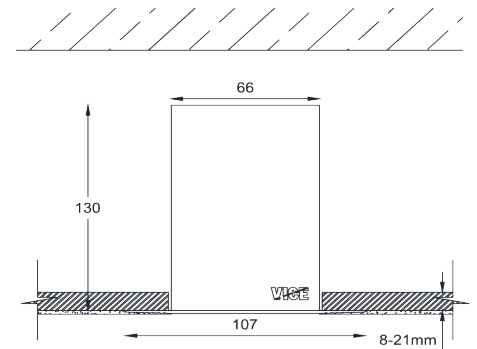

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / ELLIPTICAL NARROW LENS RECESSED TRIMLESS

Mounting Ratio



100 to 150 mm

Setback from the wall is defined by wall texture and height. Consult factory for optimal setback according to your project conditions.

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / ELLIPTICAL NARROW LENS

RECESSED TRIMLESS

Code Index:

| <u>L 6</u> | <u>I</u> | <u>R T</u> | <u>GL</u> | <u>XX</u> | ----- | - | <u>2 0</u> | <u>WS</u> | <u>N</u> | <u>I</u> | --- | - |
|------------|-------------|------------|-----------|------------|-----------------|---------|------------|-------------|-----------|----------|--------|--------|
| Family | Environment | Mounting | Optic | Beam Angle | CRI/CCT & Power | Control | IP | Body Finish | Emergency | Layout | Length | Wiring |
| | | | | | 927L1 | C | | | | | 30 | I |
| | | | | | 927L2 | D | | | | | 60 | B |
| | | | | | 927L3 | E | | | | | 90 | M |
| | | | | | 927L4 | | | | | | 120 | E |
| | | | | | 927L5 | | | | | | 150 | |
| | | | | | 930L1 | | | | | | 180 | |
| | | | | | 930L2 | | | | | | 210 | |
| | | | | | 930L3 | | | | | | 240 | |
| | | | | | 930L4 | | | | | | 270 | |
| | | | | | 930L5 | | | | | | 300 | |
| | | | | | 940L1 | | | | | | | |
| | | | | | 940L2 | | | | | | | |
| | | | | | 940L3 | | | | | | | |
| | | | | | 940L4 | | | | | | | |
| | | | | | 940L5 | | | | | | | |
| | | | | | 9TWT1 | | | | | | | |
| | | | | | 9TWT2 | | | | | | | |
| | | | | | 9TWT3 | | | | | | | |

| Family | Environment | Mounting | Optic | Beam Angle |
|---------------|-------------|----------------------|---------------------------|------------|
| L6 Lightway 6 | I Indoor | RT Recessed Trimless | GL Elliptical Narrow Lens | XX N/A |

| CRI/CCT & Power | Control | IP | Body Finish | Emergency |
|------------------------|------------------|---------|-----------------|----------------|
| LED Load initial Lumen | C Non-dimmable | 20 IP20 | WS White Smooth | N No Emergency |
| 2700°K | D DALI Dimmable | | | |
| | D DALI Type 8 | | | |
| | E 1-10V Dimmable | | | |
| 3000°K | | | | |
| 4000°K | | | | |
| Tunable White | | | | |

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 / ELLIPTICAL NARROW LENS RECESSED TRIMLESS

Layout

II Shape

Length

30 30 cm

60 60 cm

90 90 cm

120 120 cm

150 150 cm

180 180 cm

210 210 cm

240 240 cm

270 270 cm

300 300 cm

Wiring

I Individual

B Beginning

M Middle

E End

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.