

LIGHTWAY 6 – OUTDOOR / GRAZING BAFFLES INGROUND DEEP

The Lightway 6 Inground grazing baffles is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, this IP67 element benefits from specially-designed aluminum optics totally glare free from both the longitudinal and transversal sides of the profile, achieving a powerful effect while emphasizing rough-textured surfaces of great height.

- Best-in-class vertical surface grazing, Scallop-free lighting from zero start point of vertical surfaces
- Glare-free in both longitudinal and transversal sides
- 5 to 10cm from edge of fixture to surface of the wall depending on its height and surface. Use of continuous fixtures to within 10cm of side walls



Luminaire

- Application:** Grazer
Body Material: Extruded aluminium
Glass Cover: 8 mm thickness, Black Silkscreen
Cutout: Cutout: length + 3mm / width 93mm / depth 134.5mm

Installation

Operating Temperature: -10 to 50°C


Optics

- Optic Type:** UV stabilized TIR Lens
Glare Control Device: Aluminium Anti-Glare Baffles and Linear Glare Shield


Electrical equipment

- Mains Voltage:** 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%


Polar Curve




Narrow Beam, 8° /
LOR: 26.3%



Narrow Beam, 15°
/ LOR: 34.2%




Narrow Beam, 15°
/ LOR: 25.25%

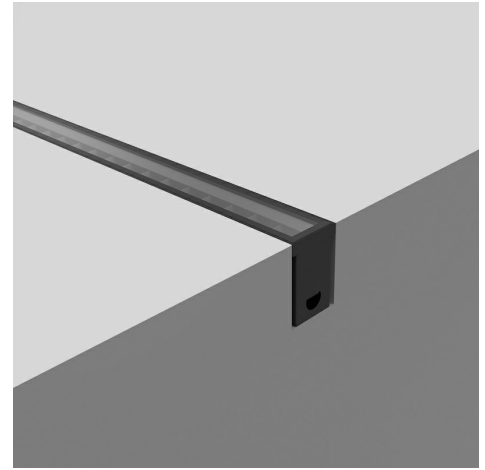

light
MIDDLE EAST
AWARDS
2016


reddot award 2017
winner

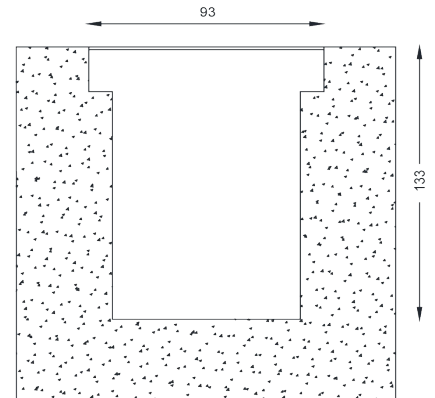

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 – OUTDOOR / GRAZING BAFFLES INGROUND DEEP

Mounting Ratio



Setback from the wall is defined by wall texture and height. Consult factory for optimal setback according to your project conditions.

LIGHTWAY 6 – OUTDOOR / GRAZING BAFFLES

INGROUND DEEP

Code Index:

<u>L 6</u>	<u>O</u>	<u>I D</u>	<u>---</u>	<u>---</u>	<u>-----</u>	<u>-</u>	<u>6 7</u>	<u>B</u>	<u>N</u>	<u>I</u>	<u>---</u>	<u>-</u>
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
			GB	08	927P1	C					30	I
			GG	15	927P2	D					60	B
			GW		927P3	E					90	M
					930P1						120	E
					930P2						150	
					930P3							
					940P1							
					940P2							
					940P3							
					9TW							

Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency
L6 Lightway 6	O Outdoor	ID Inground	GB Black Grazing Baffles GG Gray Grazing Baffles GW White Grazing Baffles	08 Narrow Beam, 8° 15 Narrow Beam, 15°	LED Load initial Lumen 2700°K 927P1: 20 W/m 1700 lm/m 927P2: 30 W/m 2250 lm/m 927P3: 42 W/m 3000 lm/m 3000°K 930P1: 20 W/m 1700 lm/m 930P2: 30 W/m 2400 lm/m 930P3: 42 W/m 3100 lm/m 4000°K 940P1: 20 W/m 1900 lm/m 940P2: 30 W/m 2550 lm/m 940P3: 42 W/m 3300 lm/m Tunable White 9TWP1: 20 W/m 2560 lm/m 9TWP2: 30 W/m 3650 lm/m 9TWP3: 42 W/m 4730 lm/m	C Non-dimmable D DALI Dimmable D DALI Type 8 E 1-10V Dimmable	67 IP67	B Black	N No Emergency

Layout	Length	Wiring
I I Shape	30 30 cm 60 60 cm 90 90 cm 120 120 cm 150 150 cm	I Individual B Beginning M Middle E End

We reserve the right to make technical changes without prior notice