


# LIGHTWAY 6 – OUTDOOR / ASYMMETRICAL LENS INGROUND SHALLOW

The Lightway 6 Inground asymmetrical linear lens is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, this IP67 element provides homogeneous distribution of light over vertical surfaces while achieving a very high output, making it ideal for high ceiling lighting applications.

- The flush lens delivers the best wall uniformity. Vertical light uniformity (1:3)
- High output, ideal for vertical surfaces (over 4 meters high lighting applications)
- Wide lateral illumination with minimal cut-off
- 45cm of side walls to minimize unwanted light spillage
- IK10

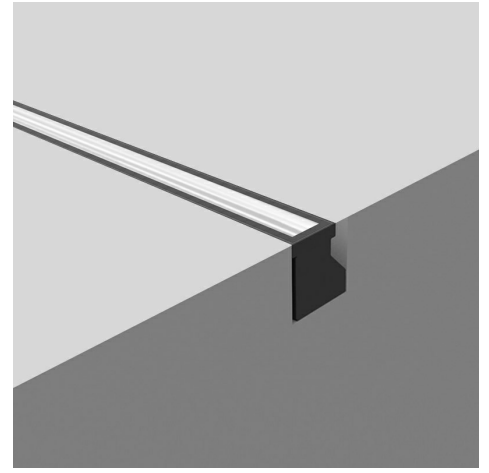

## Luminaire

**Product Type:** Washer  
**Body Material:** Extruded aluminium  
**Glass Cover:** Black Serigraphy


## Optics

**Optic Type:** PMMA Asymmetrical Linear Lens  
**Surface diffuser:** Acrylic Frosted Extruded TIR Lens


## Electrical equipment

**Mains Voltage:** 220-240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

## Polar Curves




LOR: 60.83%

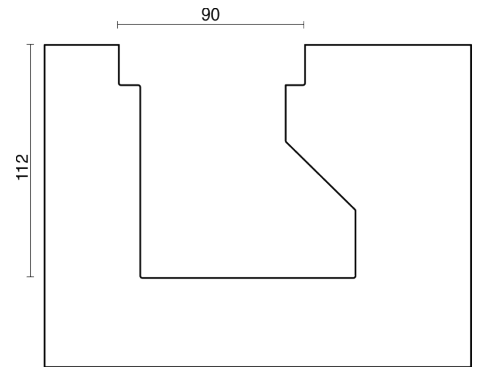

We reserve the right to make technical changes without prior notice

# LIGHTWAY 6 – OUTDOOR / ASYMMETRICAL LENS INGROUND SHALLOW

## Mounting Ratio



Setback from the wall is defined by wall texture and height. Consult factory for optimal setback according to your project conditions.

*We reserve the right to make technical changes without prior notice*

# LIGHTWAY 6 – OUTDOOR / ASYMMETRICAL LENS INGROUND SHALLOW

## Code Index:

L 6	O	I S	W L	X X	_____	_____	6 7	_____	N	I	_____	_____
Family	Environment	Mounting	Application	Beam Angle	CRI/CCT & Power	Dimming	IP	Body finish	Emergency	Layout	Length	Wiring
					927L1	C		BS			30	I
					927L2	D		WS			60	M
					927L3	E		GS			90	
					927L4	F					120	
					927L5							
					930L1							
					930L2							
					930L3							
					930L4							
					930L5							
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							

Family	Environment	Mounting	Application	Beam Angle
L6 Lightway 6	O Outdoor	IS Inground Shallow	WL Asymmetrical Lens	XX N/A

CRI/CCT & Power	Dimming	IP	Body finish	Emergency
<p>LED Load initial Lumen</p> <p>2700°K</p> <p>927L1: 10 W/m 1200 lm/m</p> <p>927L2: 15 W/m 1650 lm/m</p> <p>927L3: 22 W/m 2150 lm/m</p> <p>927L4: 30 W/m 3250 lm/m</p> <p>927L5: 42 W/m 4300 lm/m</p> <hr/> <p>3000°K</p> <p>930L1: 10 W/m 1350 lm/m</p> <p>930L2: 15 W/m 1900 lm/m</p> <p>930L3: 22 W/m 2550 lm/m</p> <p>930L4: 30 W/m 3800 lm/m</p> <p>930L5: 42 W/m 5100 lm/m</p> <hr/> <p>4000°K</p> <p>940L1: 10 W/m 1450 lm/m</p> <p>940L2: 15 W/m 2050 lm/m</p> <p>940L3: 22 W/m 2700 lm/m</p> <p>940L4: 30 W/m 4050 lm/m</p> <p>940L5: 42 W/m 5400 lm/m</p>	<p>C Built-in driver, non dimmable</p> <p>D Built-in driver, DALI</p> <p>E Built-in driver, 1-10V</p> <p>F Built-in driver, Phase dim</p>	67 IP67	<p>BS Black Smooth</p> <p>WS White Smooth</p> <p>GS Gray Smooth</p>	N No Emergency

Layout	Length	Wiring
I I Shape	30 30 cm	I Individual
	60 60 cm	M Beginning
	90 90 cm	M Middle
	120 120 cm	I End

We reserve the right to make technical changes without prior notice