

# LIGHTWAY 6 – OUTDOOR / OPAL INGROUND SHALLOW

The Lightway 6 Inground opal is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminium, this IP67 element benefits from a wide variety of outputs. This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls
- Great color mixing capability
- IK10



## Luminaire

**Product Type:** Ambient  
**Body Material:** Extruded aluminium  
**Glass Cover:** Black Serigraphy


## Optics

**Optic Type:** PMMA Opal Lens  
**Surface diffuser:** Acrylic Opal Diffusing Lens



## Electrical equipment

**Mains Voltage:** 220–240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

## Polar Curves



LOR: 46.28%

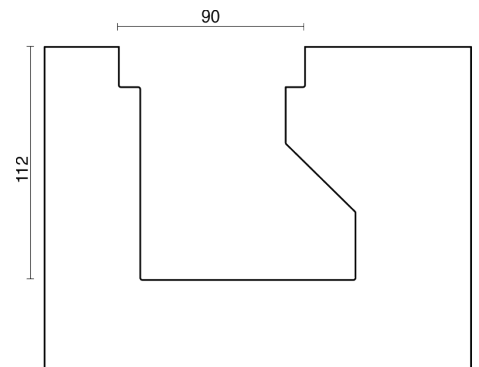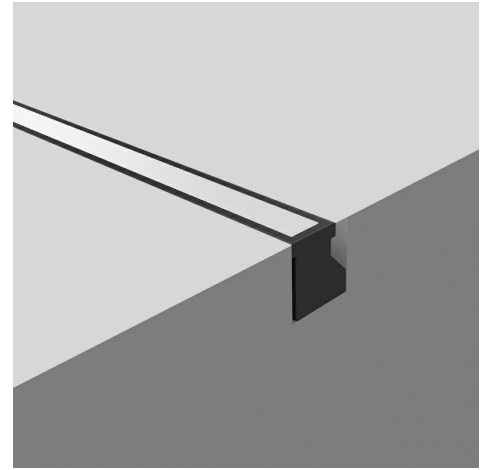

*We reserve the right to make technical changes without prior notice*

# LIGHTWAY 6 – OUTDOOR / OPAL INGROUND SHALLOW

## Code Index:

<u>L 6</u>	<u>O</u>	<u>I S</u>	<u>A O</u>	<u>X X</u>	_____	—	<u>6 7</u>	__	<u>N</u>	<u>I</u>	___	—
Family	Environment	Mounting	Application	Beam Angle	CRI/CCT & Power	Control	IP	Body finish	Emergency	Layout	Length	Wiring
					927L1	C		BS			30	I
					927L2	D		WS			60	B
					927L3	E		GS			90	M
					927L4	F					120	E
					927L5							
					930L1							
					930L2							
					930L3							
					930L4							
					930L5							
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							

Family	Environment	Mounting	Application	Beam Angle
L6 Lightway 6	O Outdoor	IS Inground Shallow	AO Opal Diffuser	XX N/A

CRI/CCT & Power	Control	IP	Body finish	Emergency
<p>LED Load initial Lumen</p> <p>2700°K</p> <p>927L1: 10 W/m 1200 lm/m</p> <p>927L2: 15 W/m 1650 lm/m</p> <p>927L3: 22 W/m 2150 lm/m</p> <p>927L4: 30 W/m 3250 lm/m</p> <p>927L5: 42 W/m 4300 lm/m</p> <hr/> <p>3000°K</p> <p>930L1: 10 W/m 1350 lm/m</p> <p>930L2: 15 W/m 1900 lm/m</p> <p>930L3: 22 W/m 2550 lm/m</p> <p>930L4: 30 W/m 3800 lm/m</p> <p>930L5: 42 W/m 5100 lm/m</p> <hr/> <p>4000°K</p> <p>940L1: 10 W/m 1450 lm/m</p> <p>940L2: 15 W/m 2050 lm/m</p> <p>940L3: 22 W/m 2700 lm/m</p> <p>940L4: 30 W/m 4050 lm/m</p> <p>940L5: 42 W/m 5400 lm/m</p>	<p>C Built-in driver, non-dimmable</p> <p>D Built-in driver, DALI</p> <p>E Built-in driver, 1-10V</p> <p>F Built-in driver, phase dimming</p>	67 IP67	<p>BS Black Smooth</p> <p>WS White Smooth</p> <p>GS Gray Smooth</p>	N No Emergency

Layout	Length	Wiring
II Shape	30 30 cm	I Individual
	60 60 cm	B Beginning
	90 90 cm	M Middle
	120 120 cm	E End

We reserve the right to make technical changes without prior notice