


LIGHTWAY 6 – OUTDOOR / DIAMOND PRISM

INGROUND DEEP

The Lightway 6 Inground Diamond Prism is developed for beautiful lighting in harsh environmental conditions. Made from extruded aluminum, this IP67 element benefits from a wide variety of outputs. The diamond-like prism structure provides an excellent light-brilliance and precision with great glare reduction (UGR<19) and superior vertical/horizontal illumination.

- Good glare control (UGR<19). Ideal for the workplace
- High efficiency luminaire: 70% LOR
- Homogeneous glare reduction in all C-levels

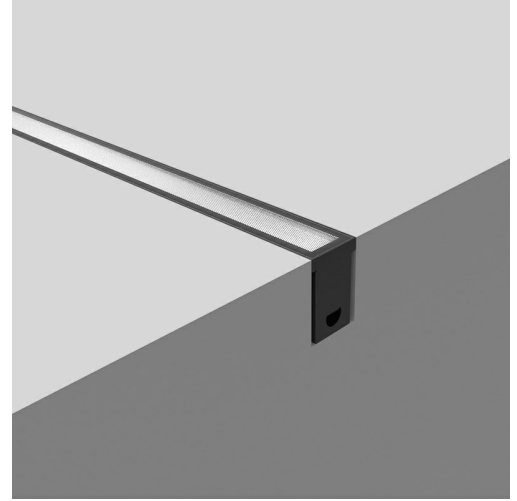

Luminaire


Application:	Ambient
Body Material:	Extruded aluminium
Glass Cover:	8 mm thickness, Black Silkscreen
Cutout:	Cutout: length + 3mm / width 93mm / depth 134.5mm

Installation

Operating Temperature: -10 to 50°C

Optics


Glare Control Device:	Diamond Prismatic Optic Structure
Surface Diffuser:	Acrylic Clear Micro-diamond Prismatic Structure

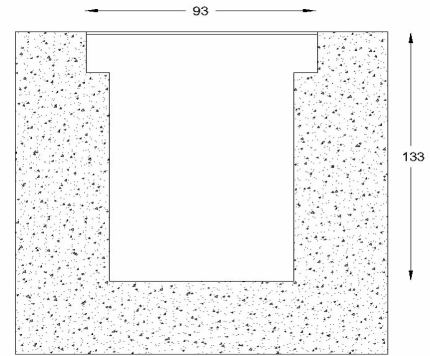

Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz

Polar Curve



LOR: 48.78%

We reserve the right to make technical changes without prior notice

LIGHTWAY 6 – OUTDOOR / DIAMOND PRISM

INGROUND DEEP

Code Index:

L 6	O	I D	A D	X X	---	---	6 7	B T	N	I	---	---
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C					30	I
					927L2	D					60	B
					927L3	E					90	M
					927L4						120	E
					927L5						150	
					930L1							
					930L2							
					930L3							
					930L4							
					930L5							
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							

Family
L6 Lightway 6

Environment
O Outdoor

Mounting
ID Inground

Optic
AD Diamond Prism

Beam Angle
XX N/A

CRI/CCT & Power

	LED Load	initial Lumen
2700°K	927L1: 3 W/ft	450 lm/ft
	927L2: 4.2 W/ft	630 lm/ft
	927L3: 6 W/ft	870 lm/ft
	927L4: 9.3 W/ft	1290 lm/ft
	927L5: 12 W/ft	1740 lm/ft

3000°K	930L1: 3 W/ft	480 lm/ft
	930L2: 4.2 W/ft	651 lm/ft
	930L3: 6 W/ft	900 lm/ft
	930L4: 9.3 W/ft	1305 lm/ft
	930L5: 12 W/ft	1800 lm/ft

4000°K	940L1: 3 W/ft	495 lm/ft
	940L2: 4.2 W/ft	690 lm/ft
	940L3: 6 W/ft	945 lm/ft
	940L4: 9.3 W/ft	1380 lm/ft
	940L5: 12 W/ft	1890 lm/ft

Layout

I I Shape

Length

30	30 cm
60	60 cm
90	90 cm
120	120 cm
150	150 cm

Control

C Non-dimmable
D DALI Dimmable
E 1-10V Dimmable

IP

67 IP67

Body Finish

BT Black Fine Textured

Emergency

N No Emergency

Wiring

I Individual
B Beginning
M Middle
E End

We reserve the right to make technical changes without prior notice