

LIGHTWAY 3 / LINEAR DASH RECESSED TRIMLESS

The Linear dash is a modern concept of glare-free linear downlight with square distribution. This elegant luminaire is designed to host multiple reflectors of different beam angles, generating a perfect and flawless square distribution, ideal for diverse general lighting applications.

The Linear dash is available in configurable lengths with various opportunities for customization to perfectly suit the geometry of any space.

- Clean square light distribution from 25mm round aperture reflectors.
- Flexibility of modules spacing and mounting height with 3 beam angles
- Homogeneous color mixing within one reflector: RGBW, warm dimming and dynamic white
- Glare-free illumination (UGR<0) for narrow beam, (UGR<14) for medium beam and (UGR<19) for wide beam at Flux =< 650 lm/module.



Luminaire

Application: Ambient
Body Material: Extruded aluminium
Cutout: Cutout: length + 3mm / width 40mm / depth 92.5mm


Optics

Optic Type: Special reflector of complex microfaceted surface
Glare Control Device: Cinco Cell Baffles


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%


Polar Curve




Narrow Beam, 36° /
LOR: 70.3%



Medium Beam, 50° /
LOR: 90.4%



Wide Beam, 60° /
LOR: 88.5%

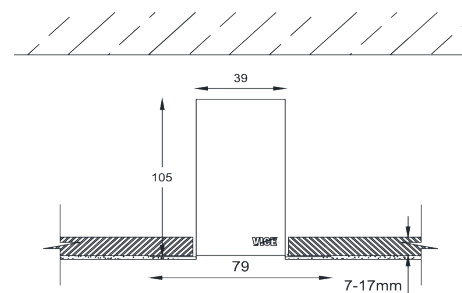

We reserve the right to make technical changes without prior notice

LIGHTWAY 3 / LINEAR DASH

RECESSED TRIMLESS

Code Index:

<u>L 3</u>	<u>I</u>	<u>R T</u>	<u>D L</u>	<u>---</u>	<u>---</u>	<u>-----</u>	<u>-</u>	<u>2 0</u>	<u>---</u>	<u>I</u>	<u>---</u>	<u>-</u>
Family	Environment	Mounting	Optic	Number of modules	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Layout	Length	Wiring
				2	SN	927F1	C		BS		60	I
				3	SM	927F2	D		BT		90	B
				4	SW	927F3	E		WS		120	M
				5		930F1			WT		150	E
				6		930F2			GS		180	
						930F3					210	
						940F1					240	
						940F2					270	
						940F3					300	
						9TWG1						
						9TWG2						
						9TWG3						

Family	Environment	Mounting	Optic	Number of modules	Beam Angle
L3 Lightway 3	I Indoor	RT Recessed Trimless	DL Linear Dash	2 2 Modules 3 3 Modules 4 4 Modules 5 5 Modules 6 6 Modules	SN Narrow Beam, 36° SM Medium Beam, 50° SW Wide Beam, 60°

We reserve the right to make technical changes without prior notice

LIGHTWAY 3 / LINEAR DASH

RECESSED TRIMLESS

CRI/CCT & Power

	LED Load	initial Lumen	
2700°K	927F1: 10 W	1000 lm	
	927F2: 15 W	1400 lm	
	927F3: 20 W	1800 lm	
	927F1: 15 W	1500 lm	
	927F2: 22.5 W	2100 lm	
	927F3: 30 W	2700 lm	
	927F1: 20 W	2000 lm	
	927F2: 30 W	2800 lm	
	927F3: 40 W	3600 lm	
	927F1: 25 W	2500 lm	
	927F2: 37.5 W	3500 lm	
	927F3: 50 W	4500 lm	
3000°K	930F1: 30 W	3000 lm	
	930F2: 40 W	3800 lm	
	930F3: 40 W	3800 lm	
	930F1: 25 W	2750 lm	
	930F2: 37.5 W	3750 lm	
	930F3: 50 W	4750 lm	
	930F1: 30 W	3300 lm	
	930F2: 45 W	4500 lm	
	930F3: 60 W	5700 lm	
	4000°K	940F1: 10 W	1100 lm
		940F2: 15 W	1500 lm
		940F3: 20 W	2000 lm
940F1: 15 W		1650 lm	
940F2: 22.5 W		2250 lm	
940F3: 30 W		3000 lm	
940F1: 20 W		2200 lm	
940F2: 30 W		3000 lm	
940F3: 40 W		4000 lm	
940F1: 25 W		2750 lm	
940F2: 37.5 W		3750 lm	
940F3: 50 W		5000 lm	
Tunable White	940F1: 30 W	3300 lm	
	940F2: 45 W	4500 lm	
	940F3: 60 W	6000 lm	
	9TWG1: 10 W	1050 lm	
	9TWG2: 15 W	1450 lm	
	9TWG3: 20 W	1900 lm	
	9TWG1: 15 W	1575 lm	
	9TWG2: 22.5 W	2175 lm	
	9TWG3: 30 W	2850 lm	
	9TWG1: 20 W	2100 lm	
	9TWG2: 30 W	2900 lm	
	9TWG3: 40 W	3800 lm	
9TWG1: 25 W	2625 lm		
9TWG2: 37.5 W	3625 lm		
9TWG3: 50 W	4750 lm		
9TWG1: 30 W	3150 lm		
9TWG2: 45 W	4350 lm		
9TWG3: 60 W	5700 lm		

Control

- C Non-dimmable
- D DALI Dimmable
- E 1-10V Dimmable

IP

20 IP20

Body Finish

- BS Black Smooth
- BT Black Textured
- WS White Smooth
- WT White Textured
- GS Gray Smooth

Layout

II Shape

Length

- 60 60 cm
- 90 90 cm
- 120 120 cm
- 150 150 cm
- 180 180 cm
- 210 210 cm
- 240 240 cm
- 270 270 cm
- 300 300 cm

Wiring

- I Individual
- B Beginning
- M Middle
- E End