


# LIGHTWAY 5 / OPAL RECESSED TRIMLESS

The Lightway 5 PMMA Opal diffuser is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications.

This common diffuser offers powerful lighting and excellent light transmission with high diffusion and homogeneity.

- Superior optical transmission with no visible LED hotspots. Perfect Lambertian distribution for a soft light effect
- Wide, even levels of illumination
- High angle distribution to illuminate adjacent walls
- Great color mixing capability

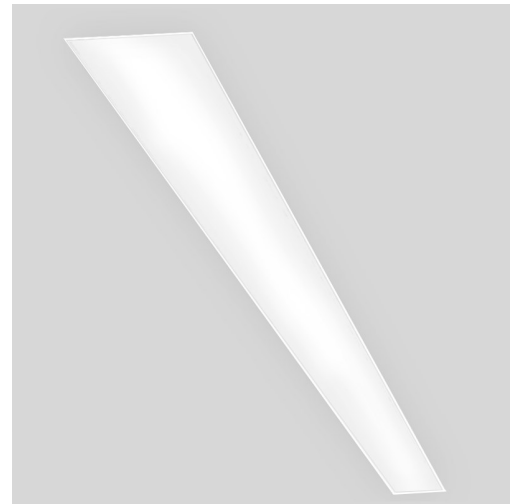

## Luminaire

**Application:** Ambient  
**Body Material:** Extruded aluminium  
**Cutout:** Cutout: length + 3mm / width 59mm / depth 97.5mm


## Optics

**Surface Diffuser:** Acrylic Opal Diffusing Lens


## Electrical equipment

**Mains Voltage:** 220-240 VAC 50/60 Hz  
**Control Gear Efficacy:** > 85%

## Polar Curves



Opal LOR: 63.8%

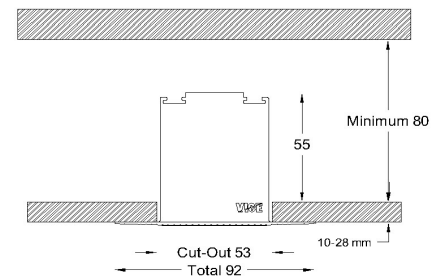

We reserve the right to make technical changes without prior notice

# LIGHTWAY 5 / OPAL

## RECESSED TRIMLESS

### Code Index:

<b>L 5</b>	<b>I</b>	<b>RT</b>	<b>AO</b>	<b>XX</b>		<b>2 0</b>		<b>N</b>	<b>I</b>			
Family	Environment	Mounting	Optic	Light Distribution	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C		BS			30	I
					927L2	D		BT			60	B
					927L3	E		WS			90	M
					927L4			WT			120	E
					927L5			GS			150	
					930L1						180	
					930L2						210	
					930L3						240	
					930L4						270	
					930L5						300	
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							
					9TWT1							
					9TWT2							
					9TWT3							

**Family**  
L5 Lightway 5

**Environment**  
I Indoor

**Mounting**  
RT Recessed Trimless

**Optic**  
AO Opal Diffuser

**Light Distribution**  
XX N/A

We reserve the right to make technical changes without prior notice

# LIGHTWAY 5 / OPAL

## RECESSED TRIMLESS

### CRI/CCT & Power

		LED Load	initial Lumen
<b>2700°K</b>	<b>927L1:</b>	10 W/m	1500 lm/m
	<b>927L2:</b>	14 W/m	2100 lm/m
	<b>927L3:</b>	20 W/m	2900 lm/m
	<b>927L4:</b>	31 W/m	4300 lm/m
<b>3000°K</b>	<b>930L1:</b>	10 W/m	1600 lm/m
	<b>930L2:</b>	14 W/m	2170 lm/m
	<b>930L3:</b>	20 W/m	3000 lm/m
	<b>930L4:</b>	31 W/m	4350 lm/m
<b>4000°K</b>	<b>940L1:</b>	10 W/m	1650 lm/m
	<b>940L2:</b>	14 W/m	2300 lm/m
	<b>940L3:</b>	20 W/m	3150 lm/m
	<b>940L4:</b>	31 W/m	4600 lm/m
<b>Tunable White</b>	<b>9TWT1:</b>	10 W/m	1500 lm/m
	<b>9TWT2:</b>	14 W/m	2100 lm/m
	<b>9TWT3:</b>	20 W/m	2900 lm/m
<b>80-2700</b>	<b>827L1:</b>	10 W/m	1770 lm/m
	<b>827L2:</b>	14 W/m	2500 lm/m
	<b>827L3:</b>	20 W/m	3450 lm/m
	<b>827L4:</b>	31 W/m	5000 lm/m
<b>80-3000</b>	<b>830L1:</b>	10 W/m	1800 lm/m
	<b>830L2:</b>	14 W/m	2600 lm/m
	<b>830L3:</b>	20 W/m	3500 lm/m
	<b>830L4:</b>	31 W/m	5100 lm/m
<b>80-4000</b>	<b>840L1:</b>	10 W/m	1900 lm/m
	<b>840L2:</b>	14 W/m	2700 lm/m
	<b>840L3:</b>	20 W/m	3700 lm/m
	<b>840L4:</b>	31 W/m	5300 lm/m

### Control

- C** Non-dimmable
- D** DALI Dimmable
- D** DALI Type 8
- E** 1-10V Dimmable

### IP

- 20** IP20

### Body Finish

- BS** Black Smooth
- BT** Black Fine Textured
- WS** White Smooth
- WT** White Textured
- GS** Gray Smooth

### Emergency

- N** No Emergency

### Layout

- I** I Shape

### Length

- 30** 30 cm
- 60** 60 cm
- 90** 90 cm
- 120** 120 cm
- 150** 150 cm
- 180** 180 cm
- 210** 210 cm
- 240** 240 cm
- 270** 270 cm
- 300** 300 cm

### Wiring

- I** Individual
- B** Beginning
- M** Middle
- E** End