

LIGHTWAY 5 / PRISMATIC OPAL SURFACE MOUNTED

The Lightway 5 Diamond-like Prism structure provides a glare reduction. This diffuser offers a very high light transmission making it ideal for workstations' applications: offices, libraries, classrooms, hospitals, etc.

- High efficiency luminaire: 70% LOR
- Homogeneous glare reduction in all C-levels



Luminaire

Application: Ambient
Body Material: Extruded aluminium


Optics

Optic Type: PMMA Prismatic
Glare Control Device: Diamond Prismatic Optic Structure
Surface Diffuser: Acrylic Clear Micro-diamond Prismatic Structure


Electrical equipment

Mains Voltage: 220-240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve



LOR: 62.2%

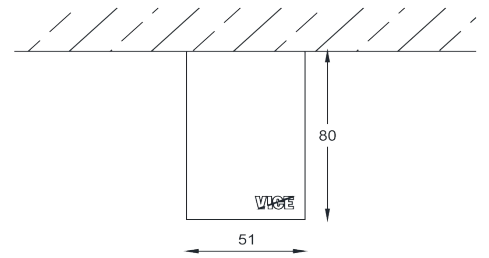

We reserve the right to make technical changes without prior notice

LIGHTWAY 5 / PRISMATIC OPAL SURFACE MOUNTED

Code Index:

<u>L 5</u>	<u>I</u>	<u>S M</u>	<u>A D</u>	<u>XX</u>	---	---	<u>2 0</u>	---	<u>N</u>	<u>I</u>	---	---
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C		BS			60	I
					927L2	D		BT			90	B
					927L3	E		WS			120	M
					927L4			WT			150	E
					927L5			GS			180	
					930L1						210	
					930L2						240	
					930L3						270	
					930L4						300	
					930L5							
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							
					9TWT1							
					9TWT2							
					9TWT3							

Family	Environment	Mounting	Optic	Beam Angle
L5 Lightway 5	I Indoor	SM Surface Mounted	AD Prismatic Opal	XX N/A

CRI/CCT & Power	Control	IP	Body Finish	Emergency
LED Load initial Lumen	C Non-dimmable	20 IP20	BS Black Smooth	N No Emergency
2700°K	D DALI Dimmable		BT Black Textured	
	D DALI Type 8		WS White Smooth	
	E 1-10V Dimmable		WT White Textured	
			GS Gray Smooth	
3000°K				
4000°K				
Tunable White				
80-2700				
80-3000				
80-4000				

We reserve the right to make technical changes without prior notice

LIGHTWAY 5 / PRISMATIC OPAL SURFACE MOUNTED

Layout

I I Shape

Length

60 60 cm

90 90 cm

120 120 cm

150 150 cm

180 180 cm

210 210 cm

240 240 cm

270 270 cm

300 300 cm

Wiring

I Individual

B Beginning

M Middle

E End

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.