

LIGHTWAY 5 / ASYMMETRIC LENS PENDANT DIRECT

The Lightway 5 Asymmetrical Linear Lens is part of a configurable system of linear LED luminaires providing flexible solutions for all indoor applications.

This Asymmetrical Lens offers powerful lighting and excellent light transmission with high diffusion and homogeneity while blocking the backward throw.

- Superior optical transmission with no visible LED hotspots. Homogeneous lighting over the side wall.
- Asymmetrical illumination for homogeneous adjacent wall lighting
- Great color mixing capability



Luminaire

Application: Ambient
Body Material: Extruded aluminium


Optics

Optic Type: PMMA Asymmetrical Linear Lens
Surface Diffuser: Acrylic Frosted Extruded TIR Lens


Electrical equipment

Mains Voltage: 220–240 VAC 50/60 Hz
Control Gear Efficacy: > 85%

Polar Curve



LOR: 62.31%

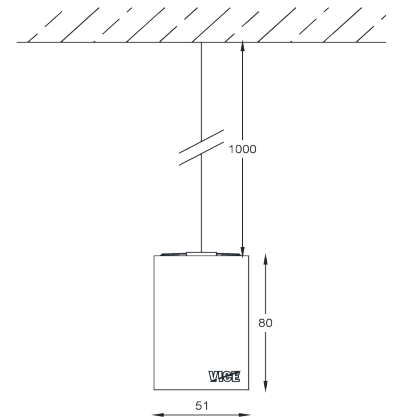

We reserve the right to make technical changes without prior notice

LIGHTWAY 5 / ASYMMETRIC LENS

PENDANT DIRECT

Code Index:

<u>L 5</u>	<u>I</u>	<u>P D</u>	<u>A L</u>	<u>X X</u>	-----	<u>2 0</u>	--	<u>N</u>	<u>I</u>	---	--	
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
					927L1	C		BS			30	I
					927L2	D		BT			60	B
					927L3	E		WS			90	M
					927L4			WT			120	E
					927L5			GS			150	
					930L1						180	
					930L2						210	
					930L3						240	
					930L4						270	
					930L5						300	
					940L1							
					940L2							
					940L3							
					940L4							
					940L5							

Family	Environment	Mounting	Optic	Beam Angle
L5 Lightway 5	I Indoor	PD Pendant Direct	AL Asymmetrical Lens	XX N/A

CRI/CCT & Power	Control	IP	Body Finish	Emergency
<p>LED Load initial Lumen</p> <p>2700°K</p> <p>927L1: 10 W/m 1200 lm/m</p> <p>927L2: 15 W/m 1650 lm/m</p> <p>927L3: 22 W/m 2150 lm/m</p> <p>927L4: 30 W/m 3250 lm/m</p> <p>927L5: 42 W/m 4300 lm/m</p> <p>3000°K</p> <p>930L1: 10 W/m 1350 lm/m</p> <p>930L2: 15 W/m 1900 lm/m</p> <p>930L3: 22 W/m 2550 lm/m</p> <p>930L4: 30 W/m 3800 lm/m</p> <p>930L5: 42 W/m 5100 lm/m</p> <p>4000°K</p> <p>940L1: 10 W/m 1450 lm/m</p> <p>940L2: 15 W/m 2050 lm/m</p> <p>940L3: 22 W/m 2700 lm/m</p> <p>940L4: 30 W/m 4050 lm/m</p> <p>940L5: 42 W/m 5400 lm/m</p>	<p>C Non-dimmable</p> <p>D DALI Dimmable</p> <p>E 1-10V Dimmable</p>	20 IP20	<p>BS Black Smooth</p> <p>BT Black Textured</p> <p>WS White Smooth</p> <p>WT White Textured</p> <p>GS Gray Smooth</p>	N No Emergency

Layout	Length	Wiring
I I Shape	30 30 cm	I Individual
	60 60 cm	B Beginning
	90 90 cm	M Middle
	120 120 cm	E End
	150 150 cm	
	180 180 cm	
	210 210 cm	
	240 240 cm	
	270 270 cm	
	300 300 cm	

Notes

IP40 is applicable only for the individual items, however for the continuous runs it will be IP20.

